



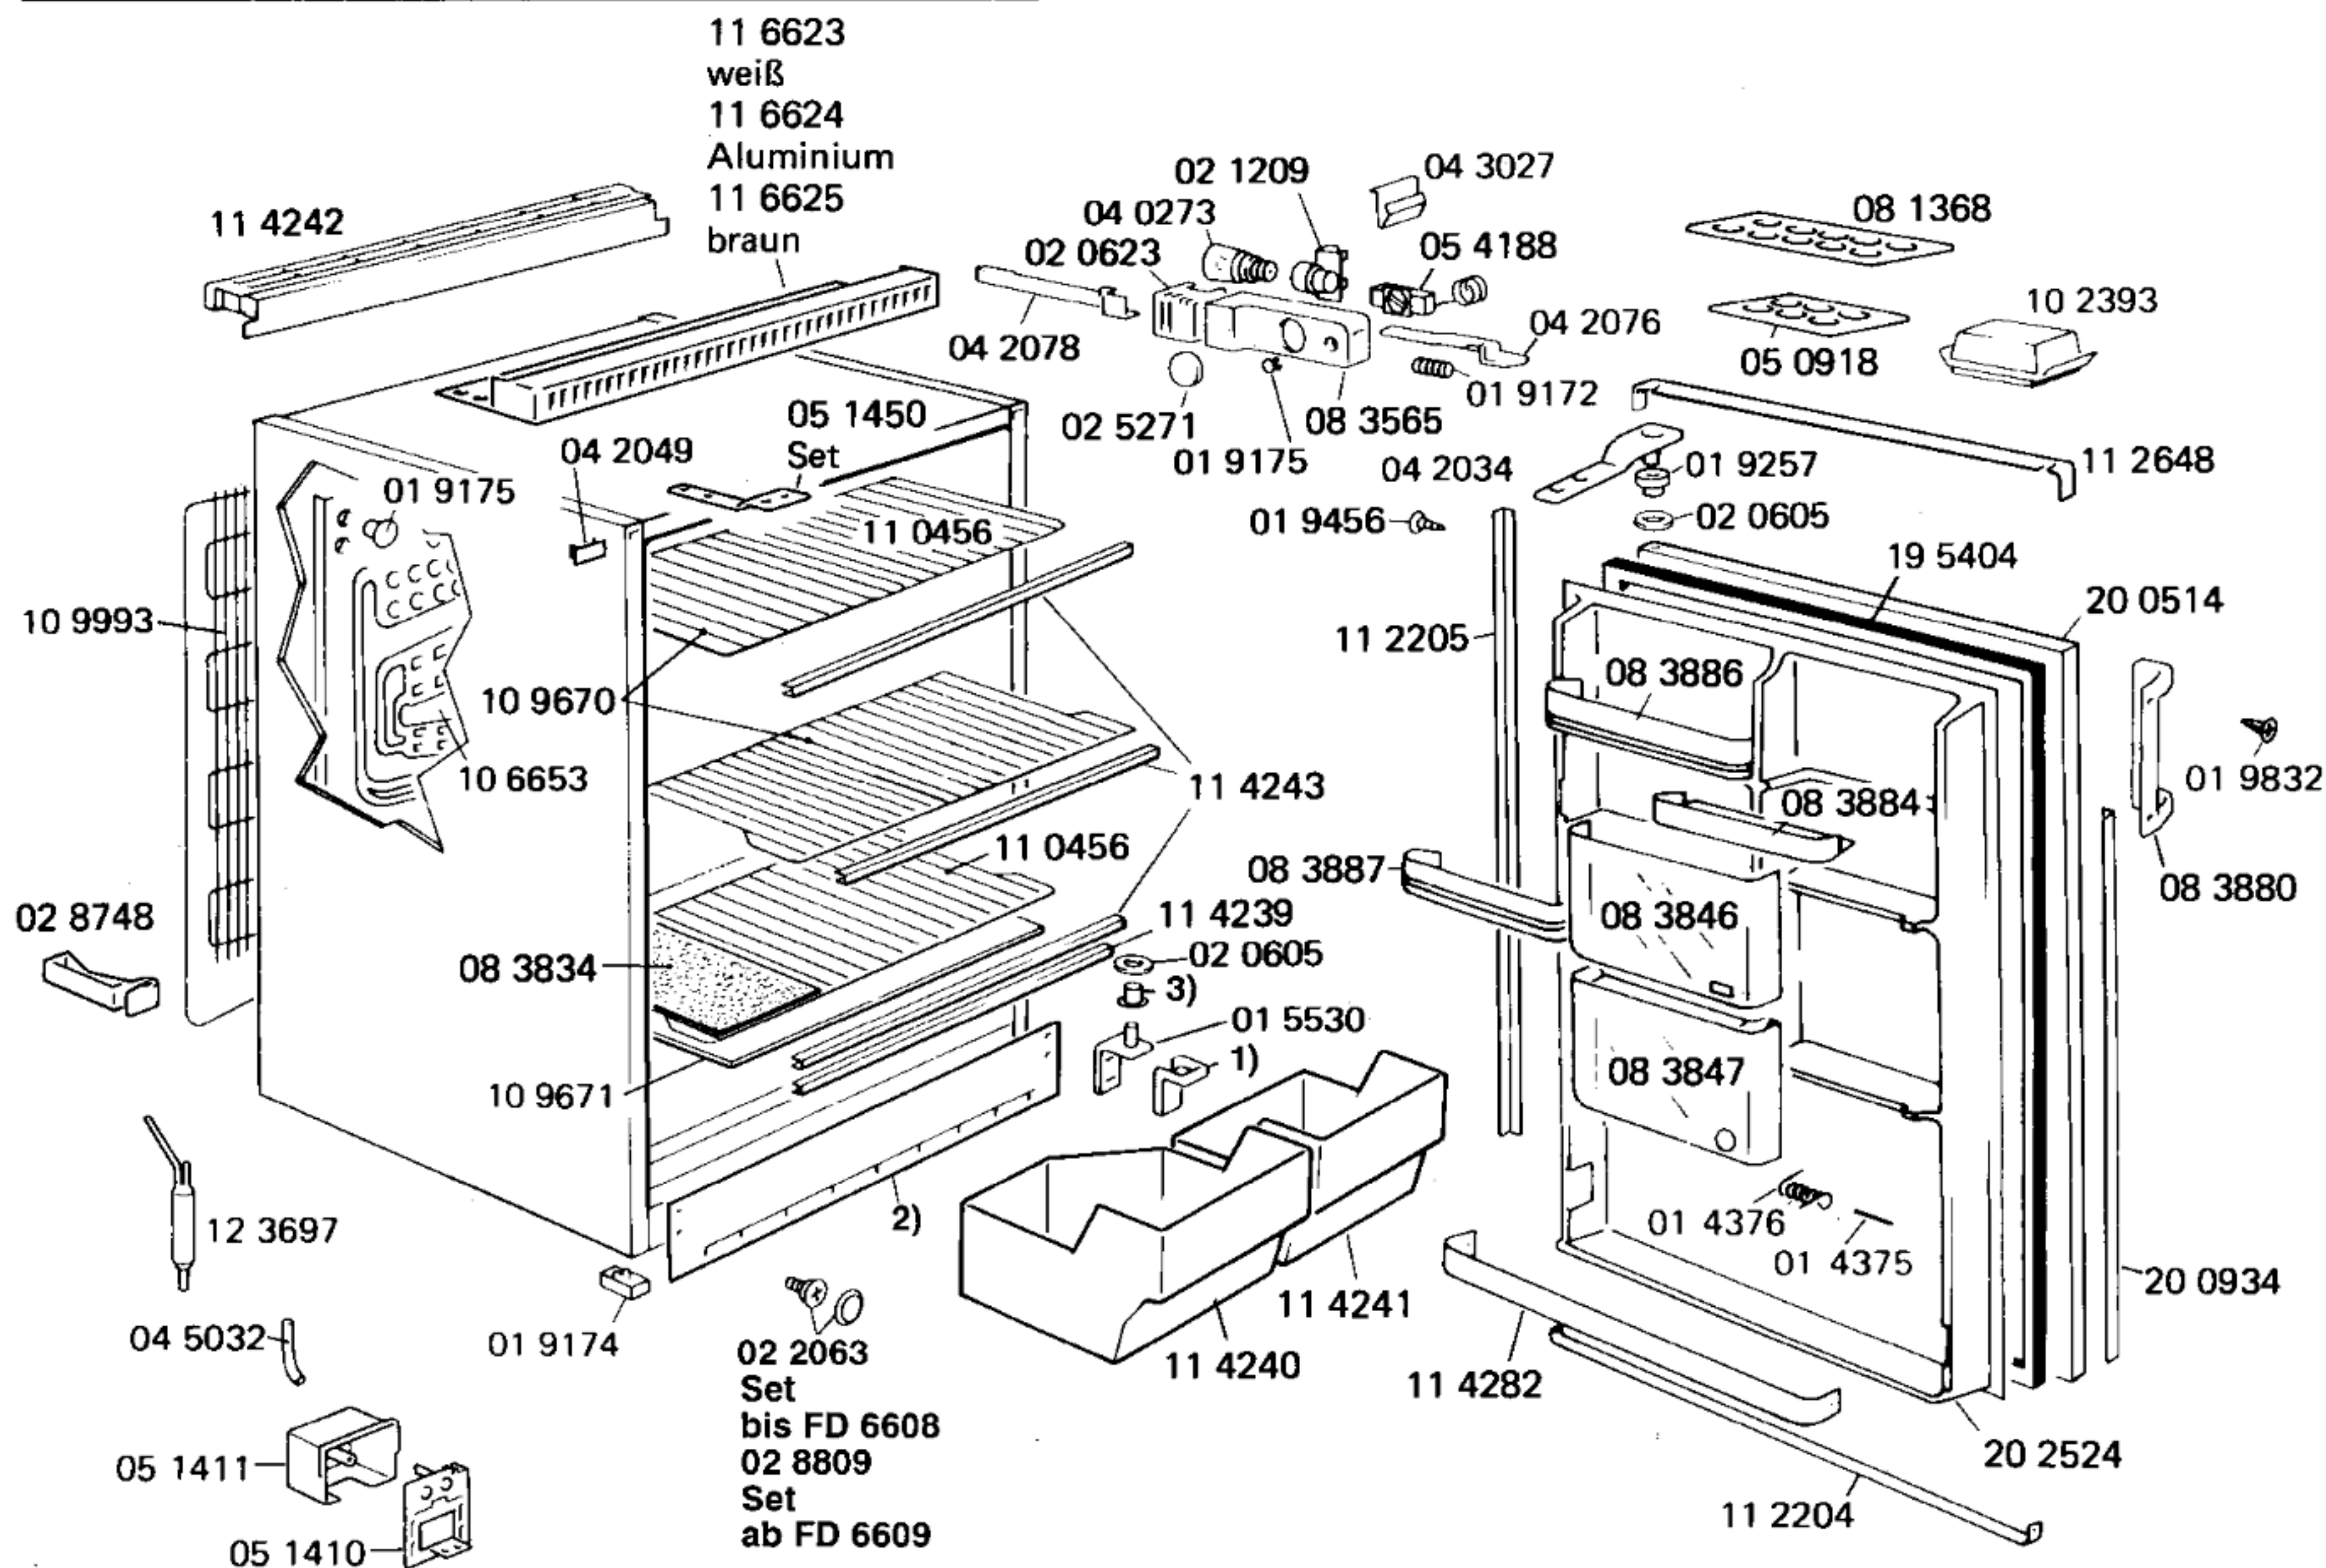

1) 02 5792
bis FD 6608
02 8810
ab FD 6609

2) 11 2207
bis FD 6608
11 7432
ab FD 6609

3) 01 9257

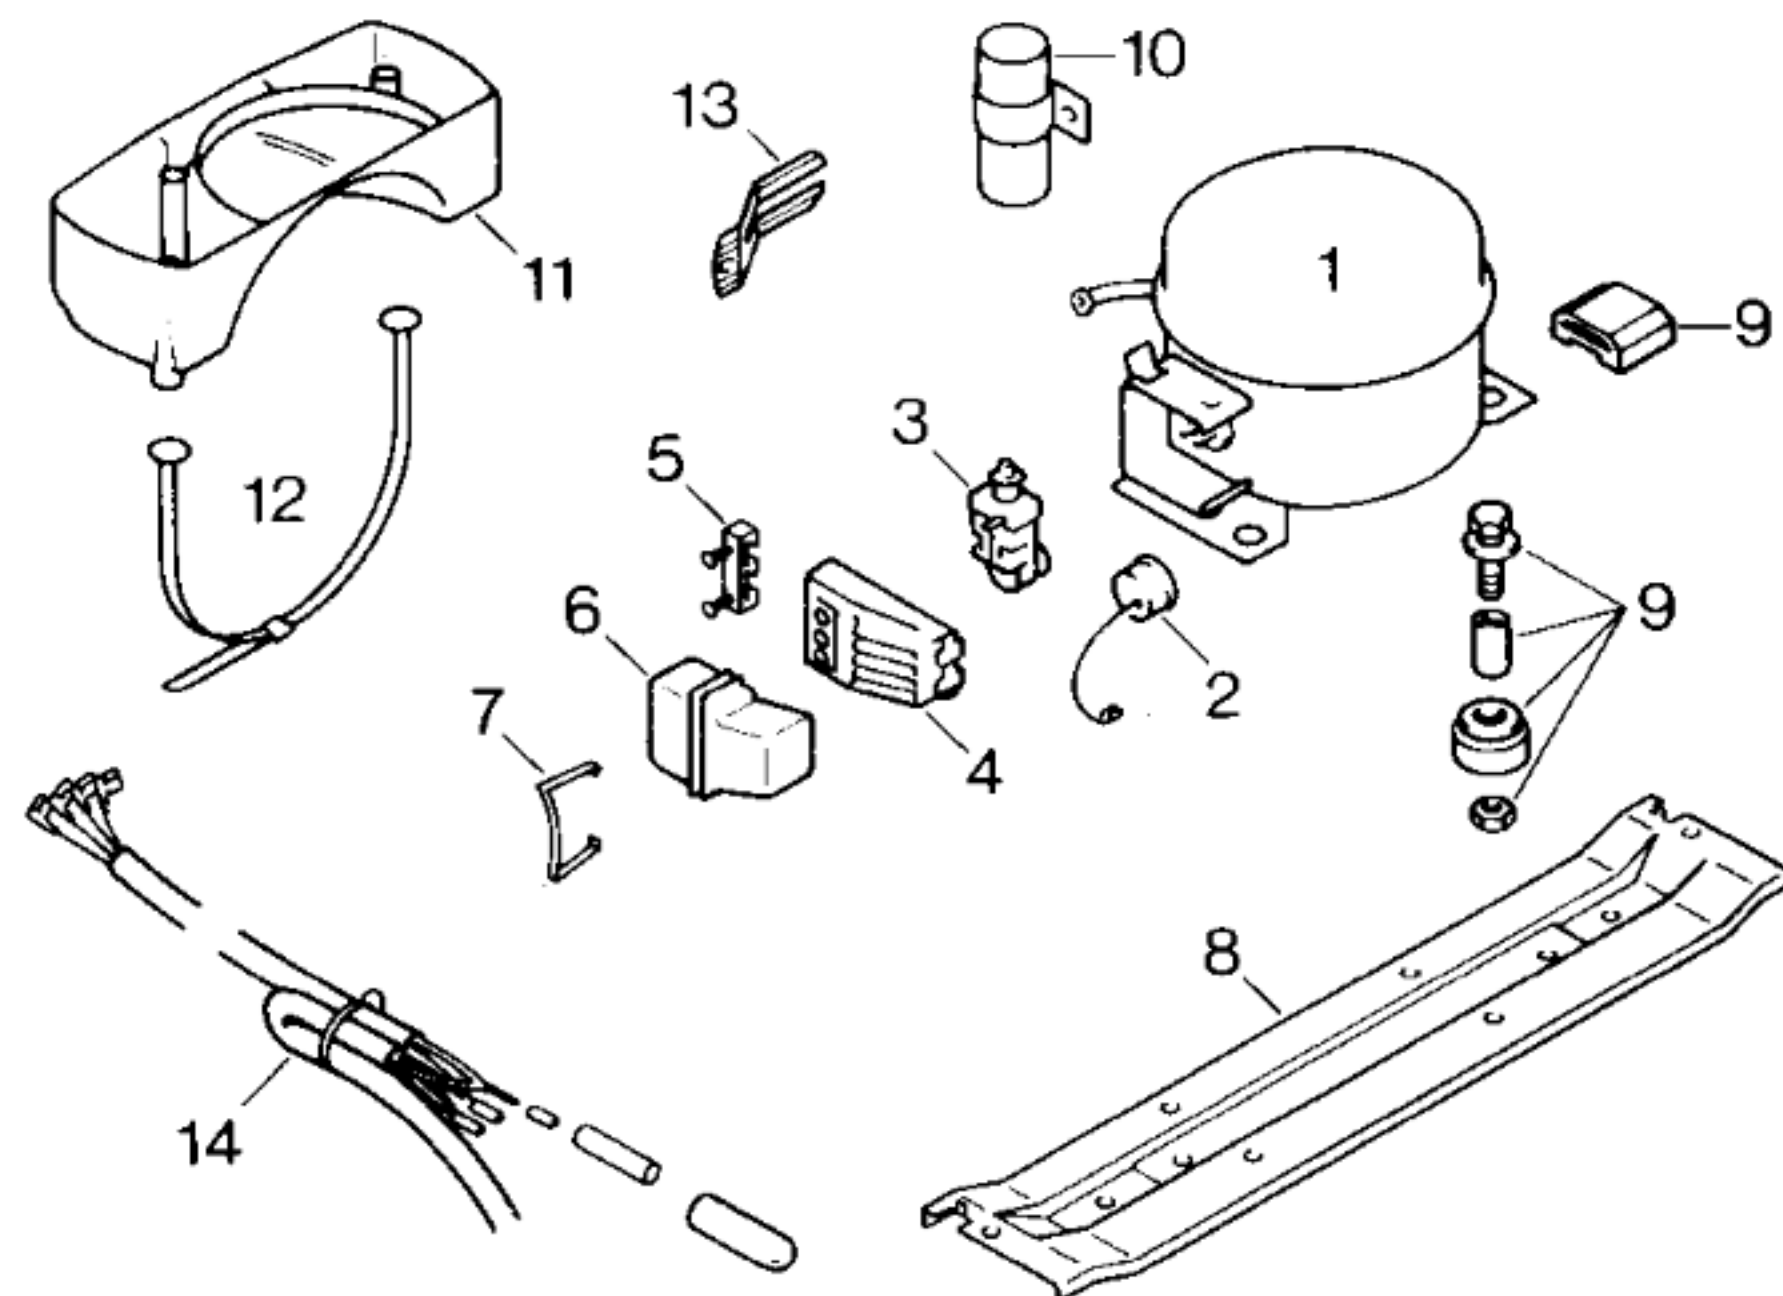

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Necchi	Aspera	Danfoss	
Typ/Type		M 3,5 J	BP 1058 A	TL 4 A	
Förderleistung/Delivery/Débit		l/h	567	576	
Anlaufstrom/Starting current/Cour. de démarrage		A	6,3	7,2	
Widerstand/Resistance/Résistance		Ω	30,6	31,0	
		Hi/aux	49,0	29,0	
Temp.-Regler/Thermostat		M + J			
Typ/Type		TF 57			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/		„ein“	+ 4	+ 4	
Valeurs de commutation		„aus“	-26,5	-13	
		(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge		R12	g	95	
Anschlußwert/Conn.load/Puiss. connectée		W	90		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	EU1	EU1, EU3	EU1, EU2	EU4
	Necchi	Aspera	Danfoss	Necchi-Mini
1	14 0110	14 0393	14 0364	
2	02 1627	02 8074		
3	02 1577	02 7424	02 0108	
4	04 9990			
5		02 7425	02 7310	
6	04 9991	05 5145	04 1413	
7	04 9996			
8	11 1567	11 1567	11 1567	
9	05 0166	05 0166	05 0166	
10				
11	07 5162	08 4744	08 4744	
12	02 1562			
13	04 1568	04 1568	04 1568	
14				