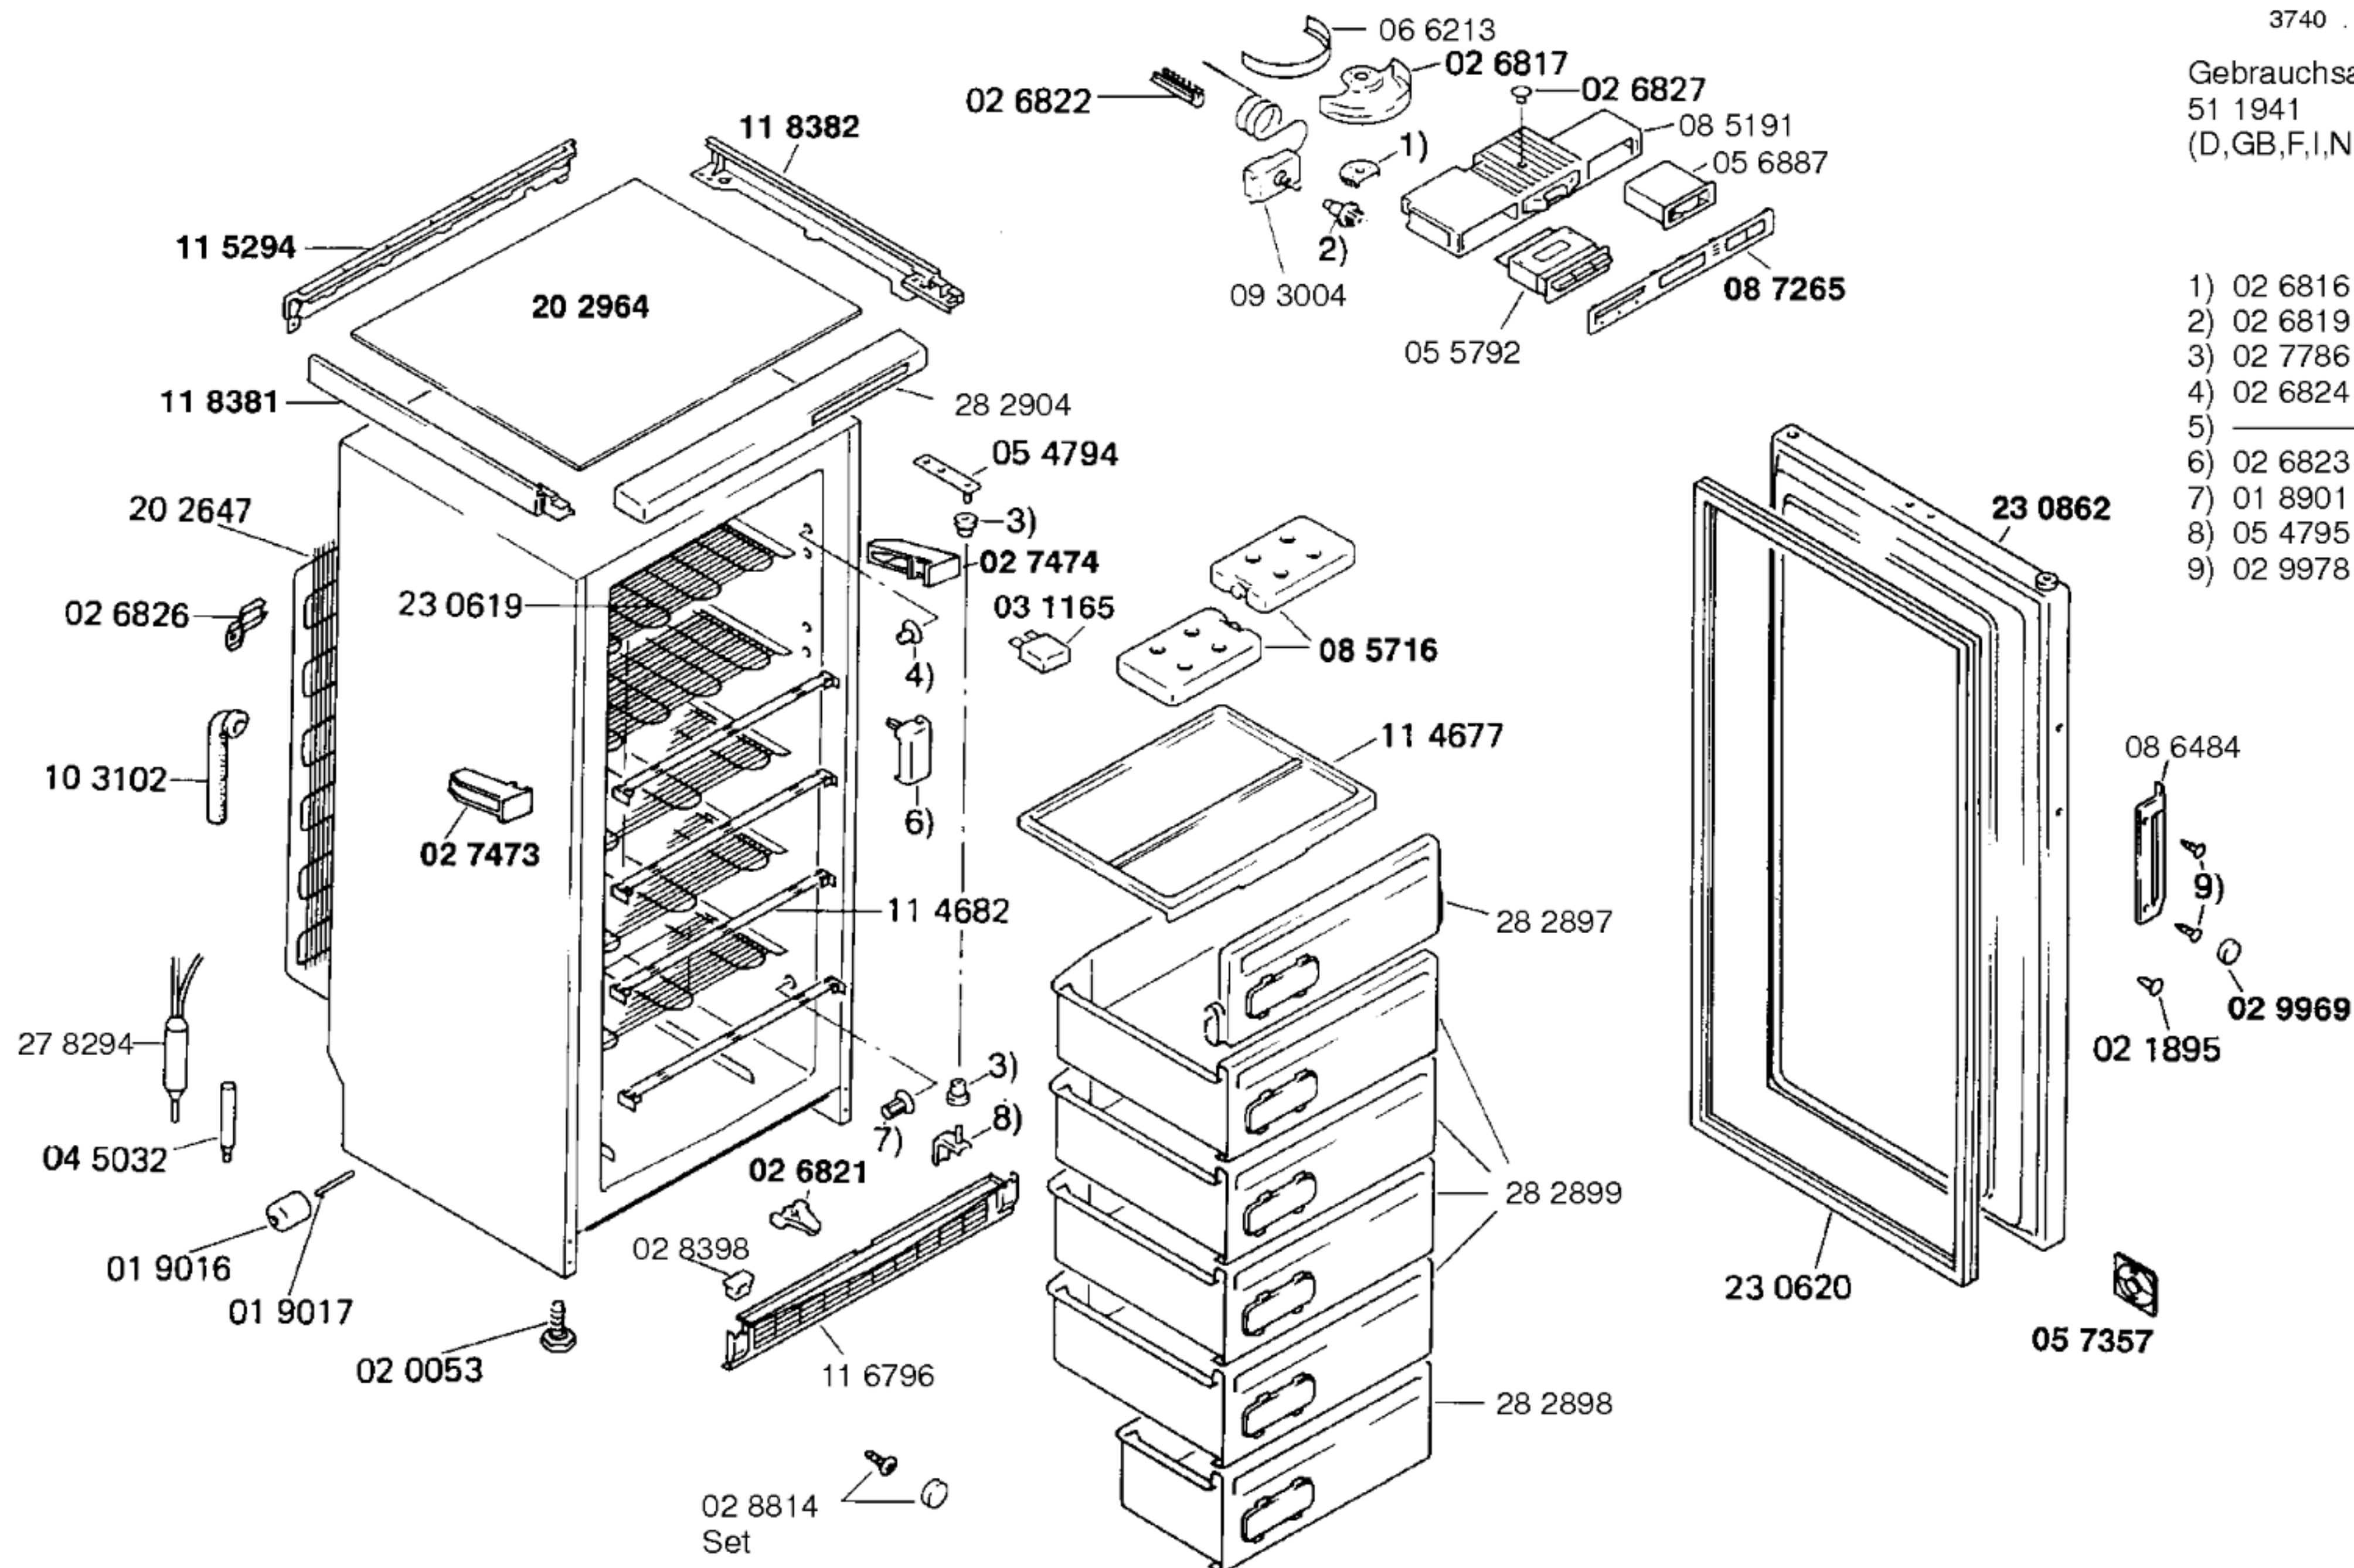
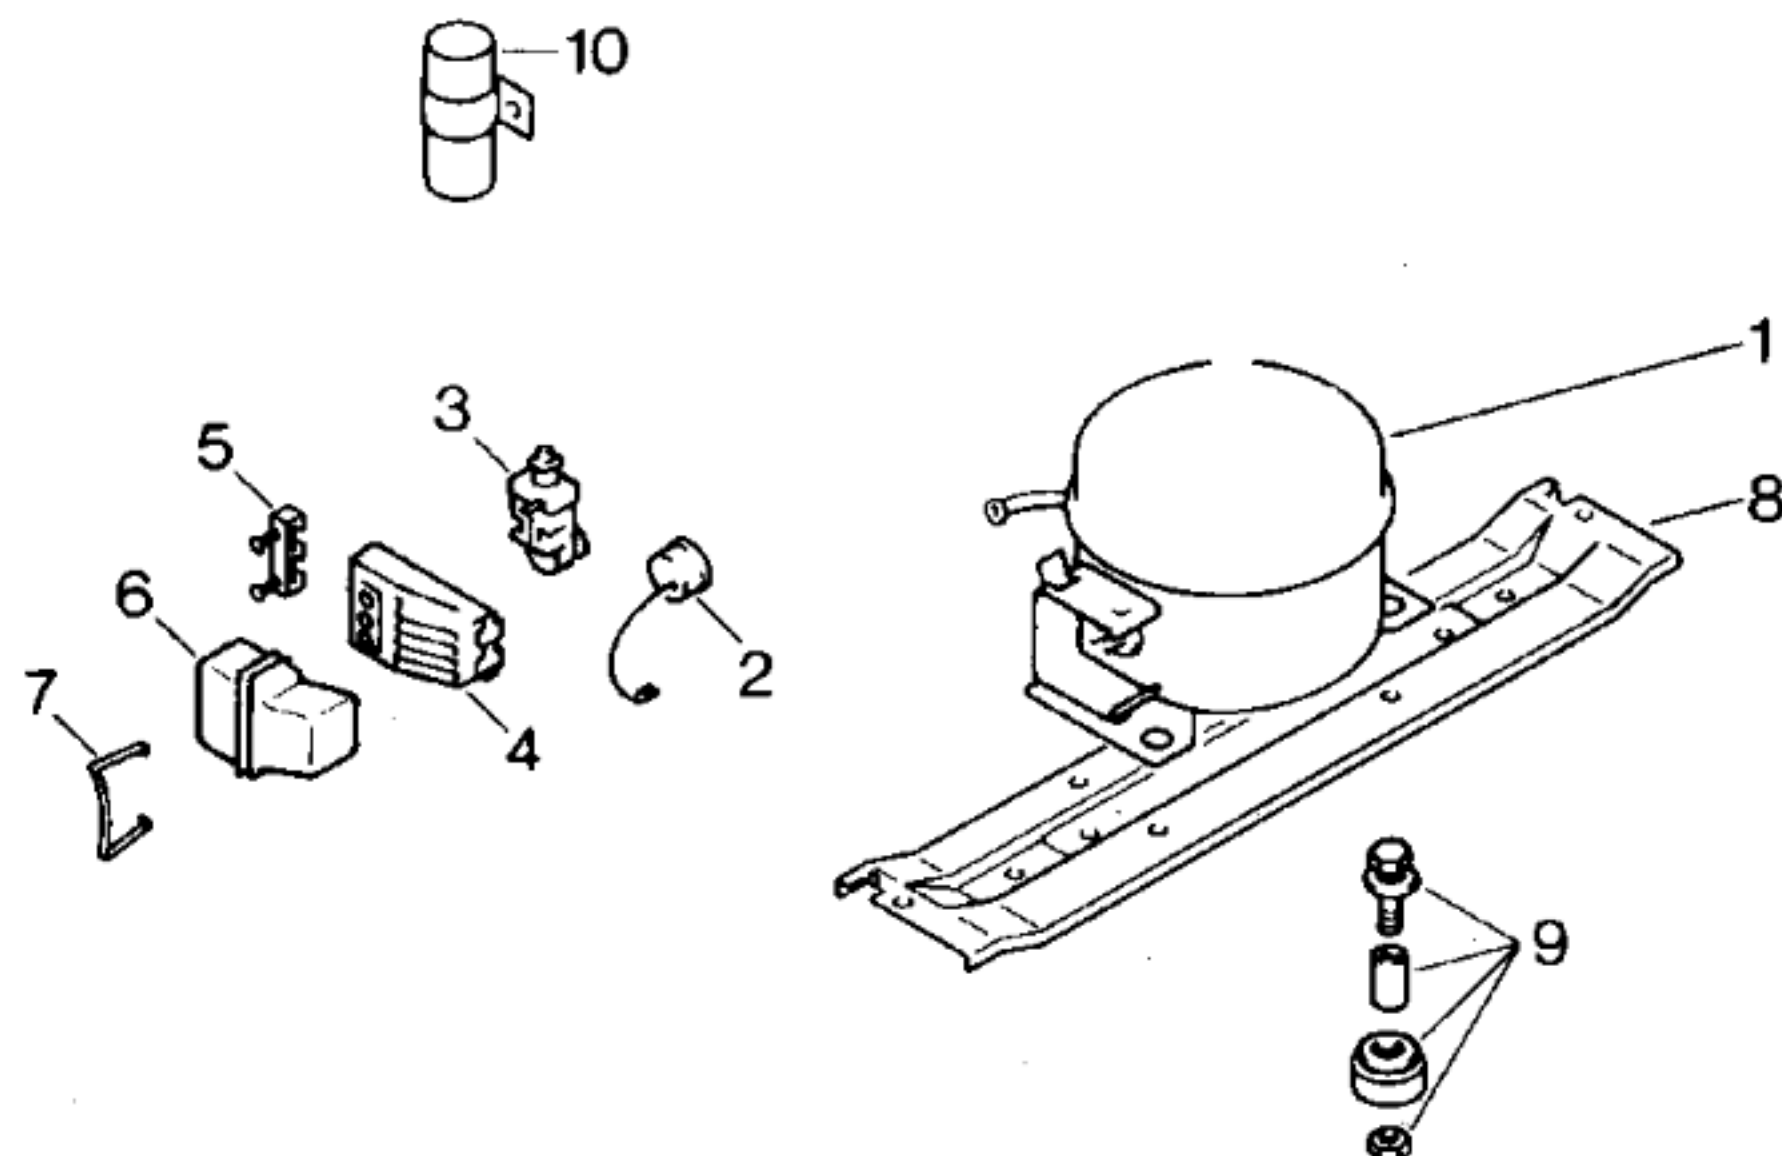


**BOSCH**

GSL5200/01-EU1

GEFRIERGERÄTE  
Gefrierschränke, StandIdent – Nummern – Konstante  
3740 . . . . .Gebrauchsanweisung  
51 1941  
(D,GB,F,I,NL,P,SF,DK,E,S)

Ident – Nummern – Konstante  
3740 . . . . .

| Pos. | Matsushita |  |  |
|------|------------|--|--|
|      | D116-LRAA  |  |  |
| 1    | 14 0563    |  |  |
| 2    |            |  |  |
| 3    | 05 8506    |  |  |
| 4    |            |  |  |
| 5    |            |  |  |
| 6    | 05 8458    |  |  |
| 7    | 02 6731    |  |  |
| 8    | 11 1919    |  |  |
| 9    | 05 0166    |  |  |
| 10   |            |  |  |
| 11   |            |  |  |
| 12   |            |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES  |  |                 |         |           |
|---------------------------------------------------------|--|-----------------|---------|-----------|
| Verdichter/Compressor/Compresseur                       |  | Matsushita      |         |           |
| Typ/Type                                                |  | D116-LRAA       |         |           |
| Förderleistung/Delivery/Débit                           |  | l/h             | 1184    |           |
| Anlaufstrom/Starting current/Cour de démarrage          |  | A               | 8,75    |           |
| Widerstand/Resistance/Résistance                        |  | Ha/main/prin.   | Ω       | 12,0      |
|                                                         |  | Hi/aux          | Ω       | 28,7      |
| Temp. Regler/Thermostat                                 |  | Danfoss         |         |           |
| Typ/Type                                                |  | 077 B2054       |         |           |
| Reglerstellung/Position                                 |  | kalt            | warm    |           |
| Schaltwerte/Switching values/<br>Valeurs de commutation |  | „ein“           | °C      | -22 -14   |
|                                                         |  | „aus“           |         | -32 -22   |
|                                                         |  | („abtauen“ od.) | „alarm“ | -17,5 -10 |
| Füllmenge/Fill.quantity/Charge                          |  | R12             | g       | 185       |
| Anschlußwert/Conn.load/Puiss. connectée                 |  | W               | 150     |           |
| Heizung/Heater/Chauffage                                |  |                 |         |           |
| Widerstand/Resistance/Résistance                        |  | Ω               |         |           |
| Leistung/Power/Puissance                                |  | W               |         |           |
| Ventilator/Blower/Ventilateur                           |  |                 |         |           |
| Widerstand/Resistance/Résistance                        |  | Ω               |         |           |
| Schaltuhr/Timer/Minuterie de contact                    |  |                 |         |           |
| Widerstand/Resistance/Résistance                        |  | Ω               |         |           |
| Magnetventil/Magnetic valve/Electrovanne                |  |                 |         |           |
| Widerstand/Resistance/Résistance                        |  | Ω               |         |           |
| Spannung/Voltage/Tension                                |  | V               |         |           |