




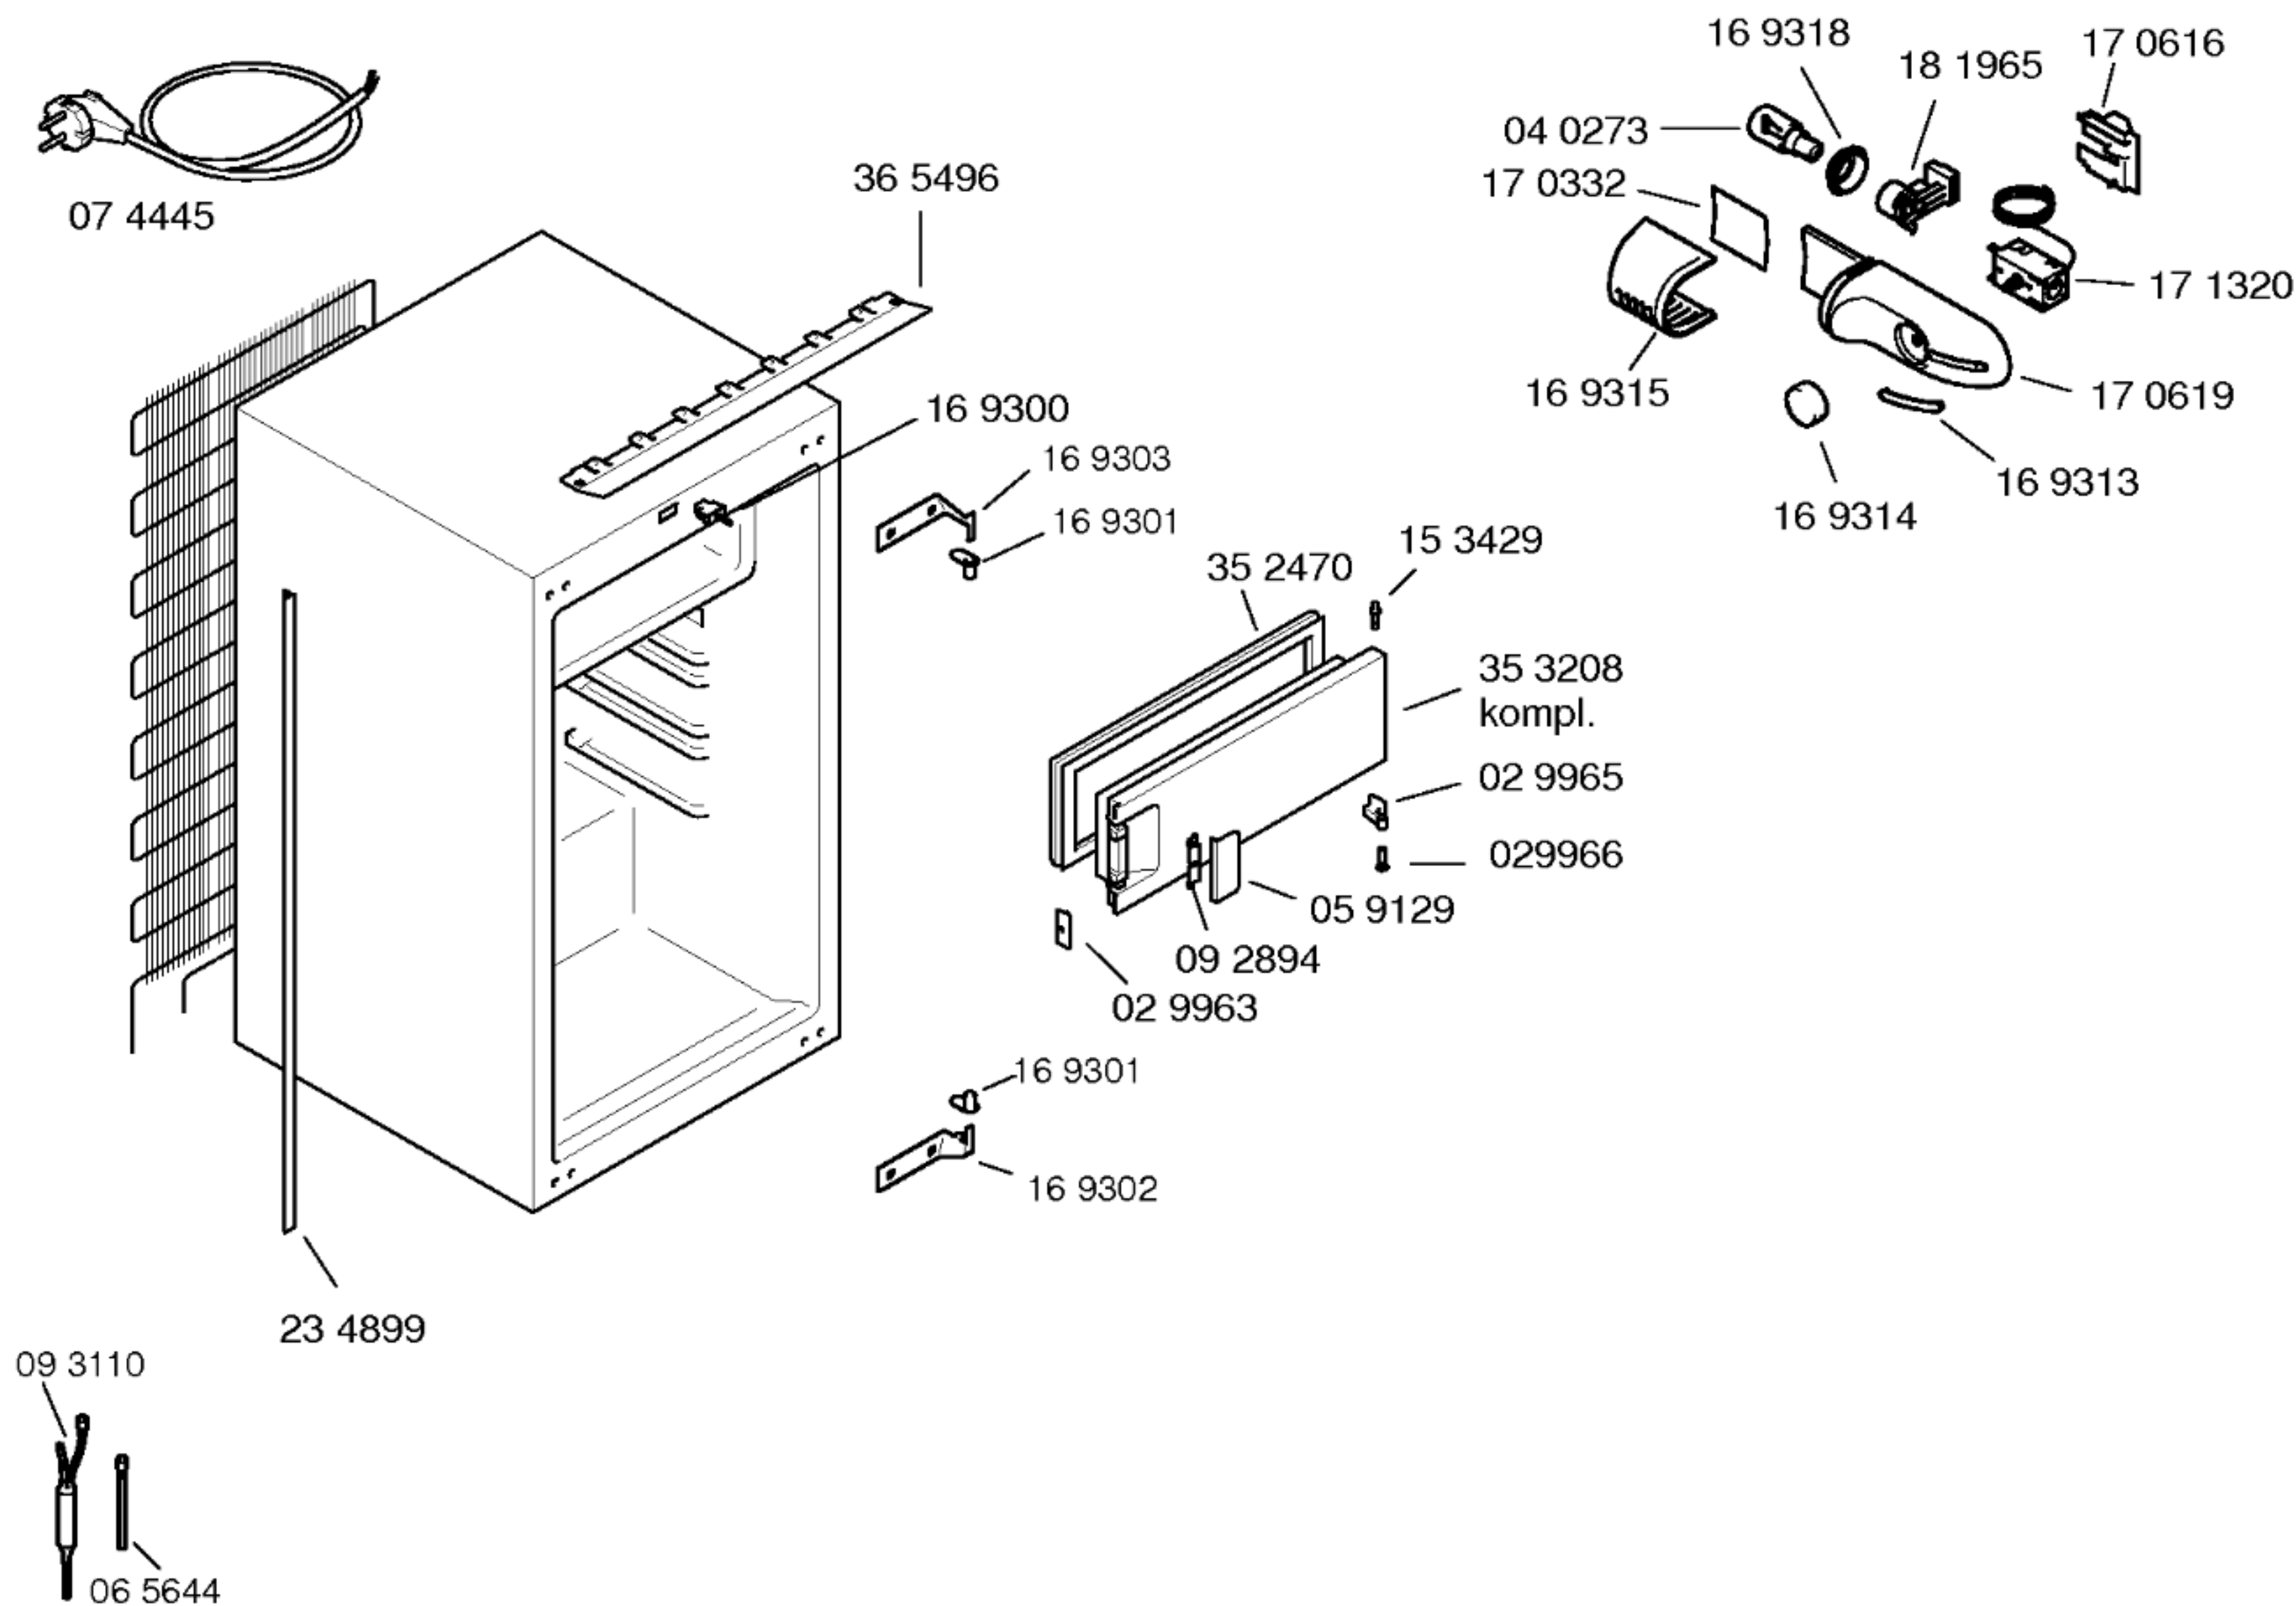

Gebrauchsanweisung
52 3259
(de,en,fr,it,nl)
Montageanleitung
52 1893
Beistellsatz
26 4862

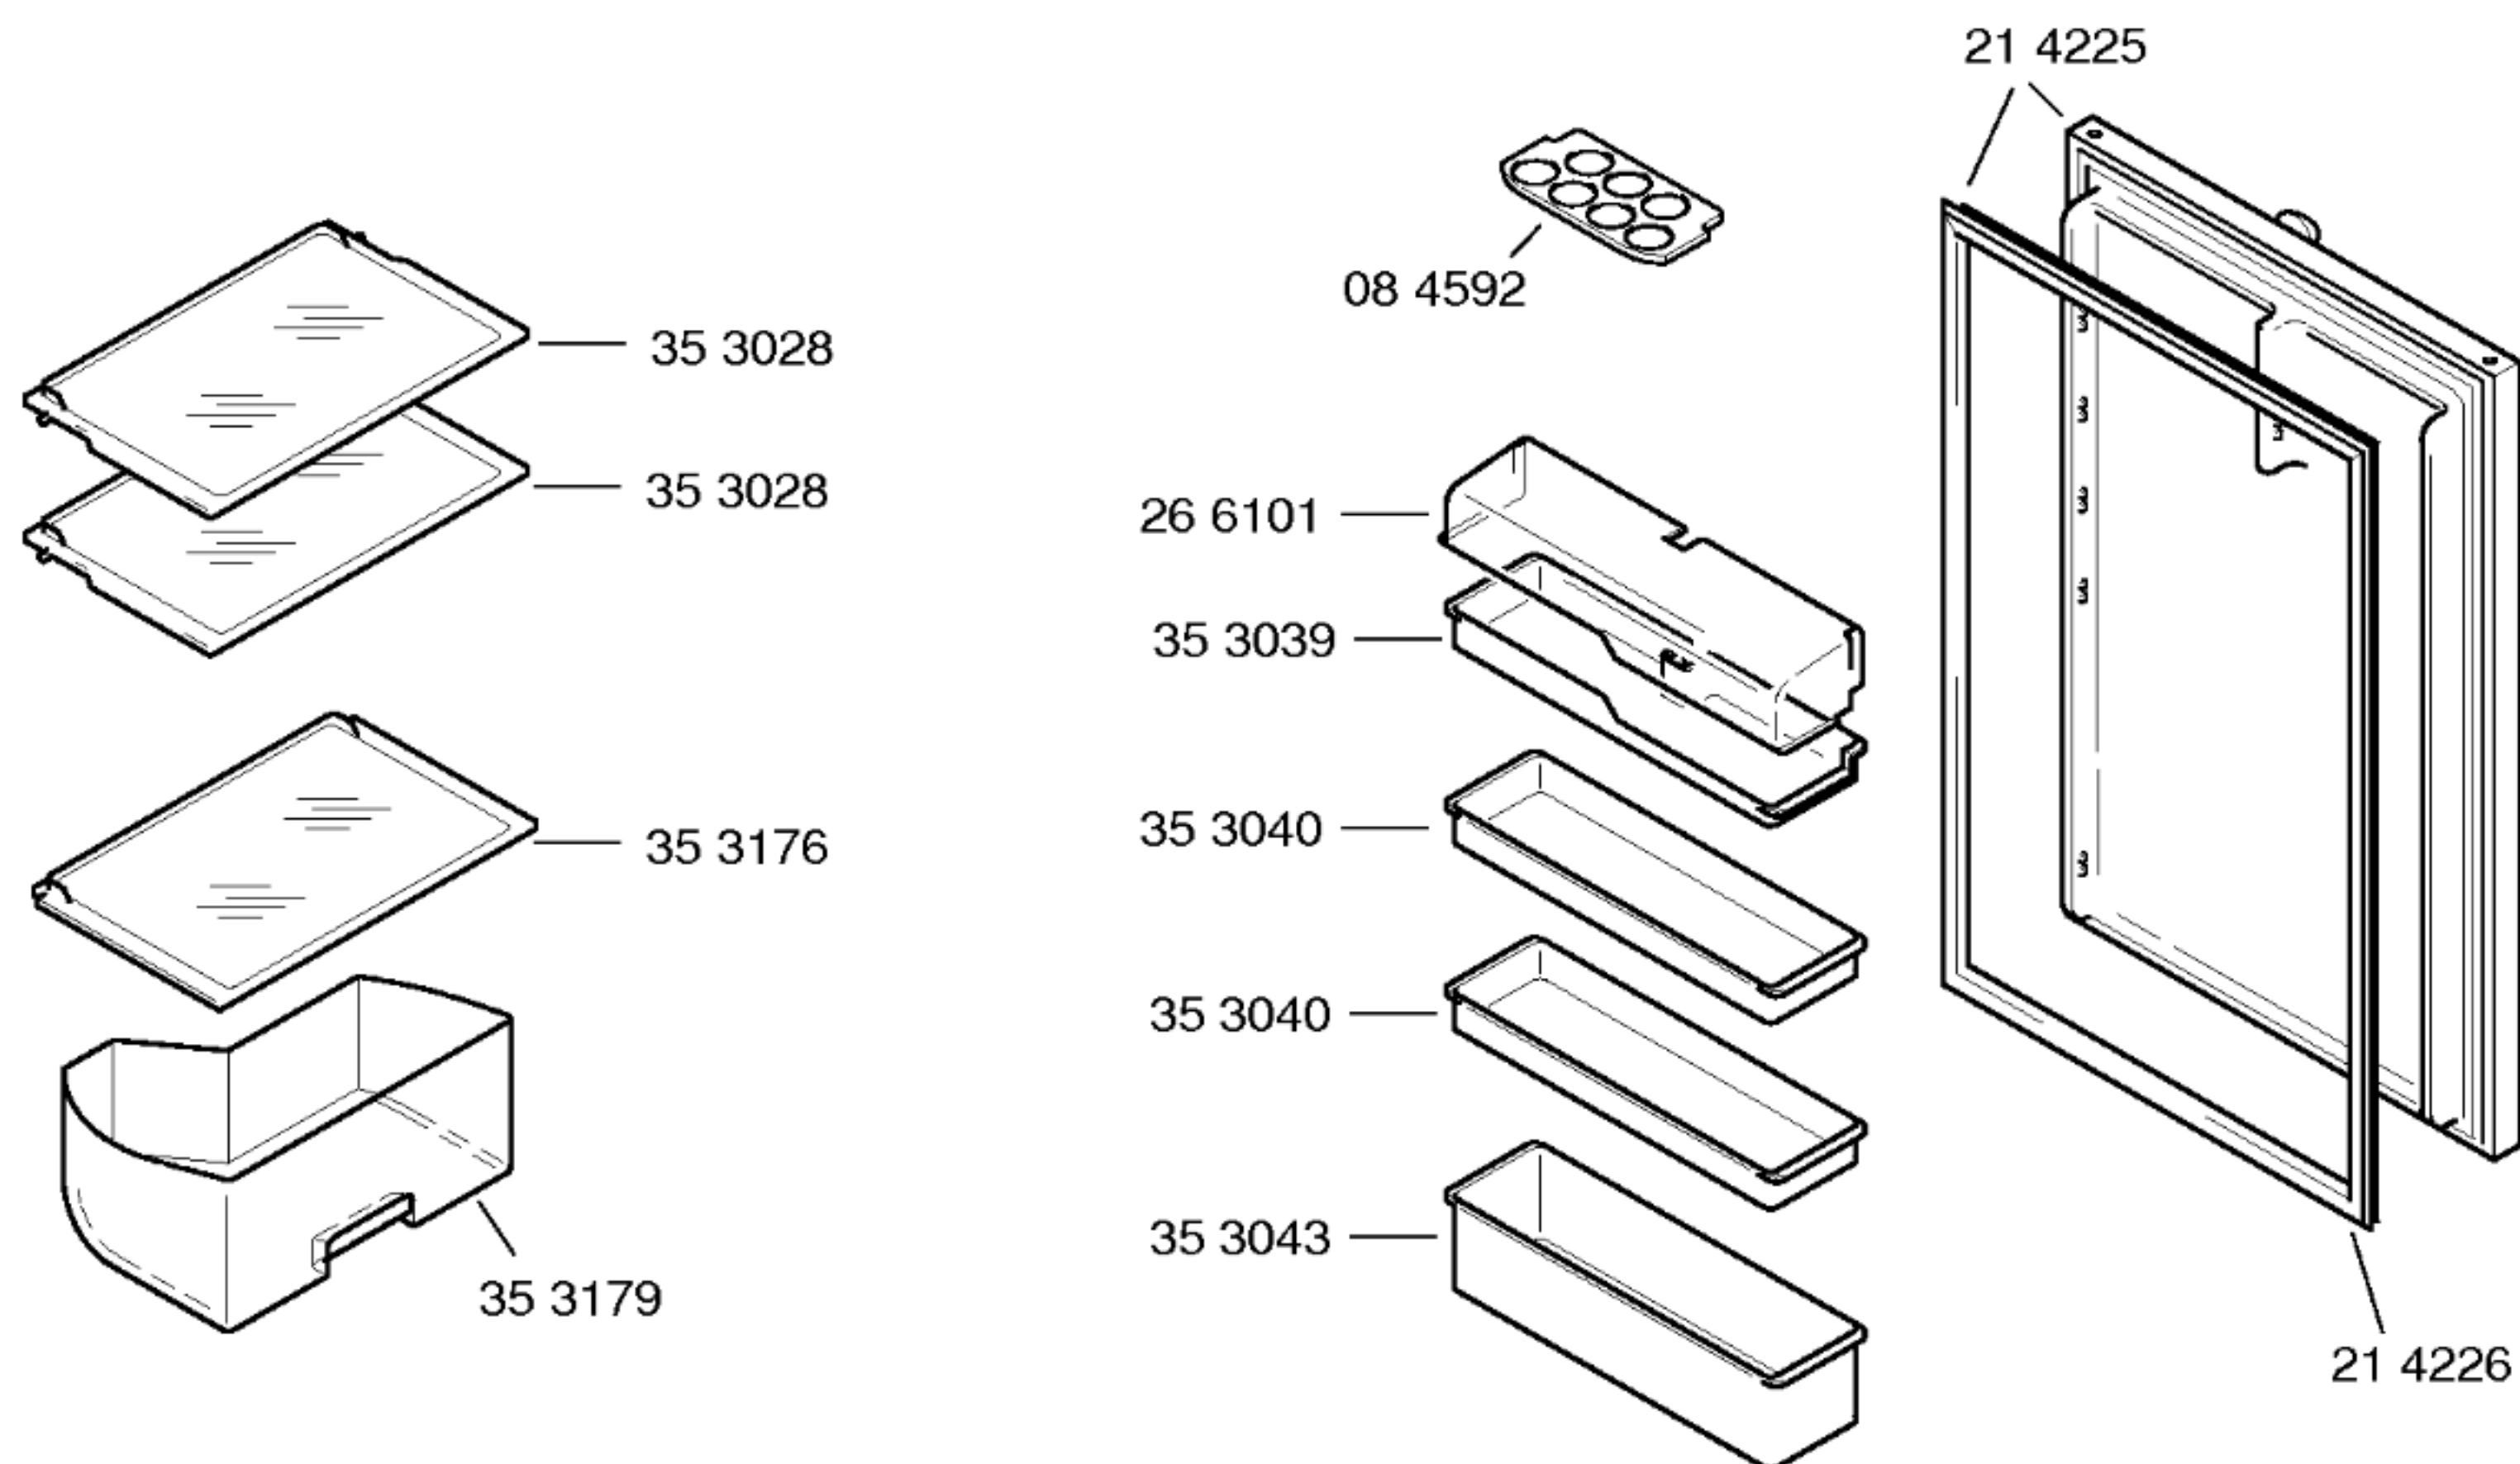

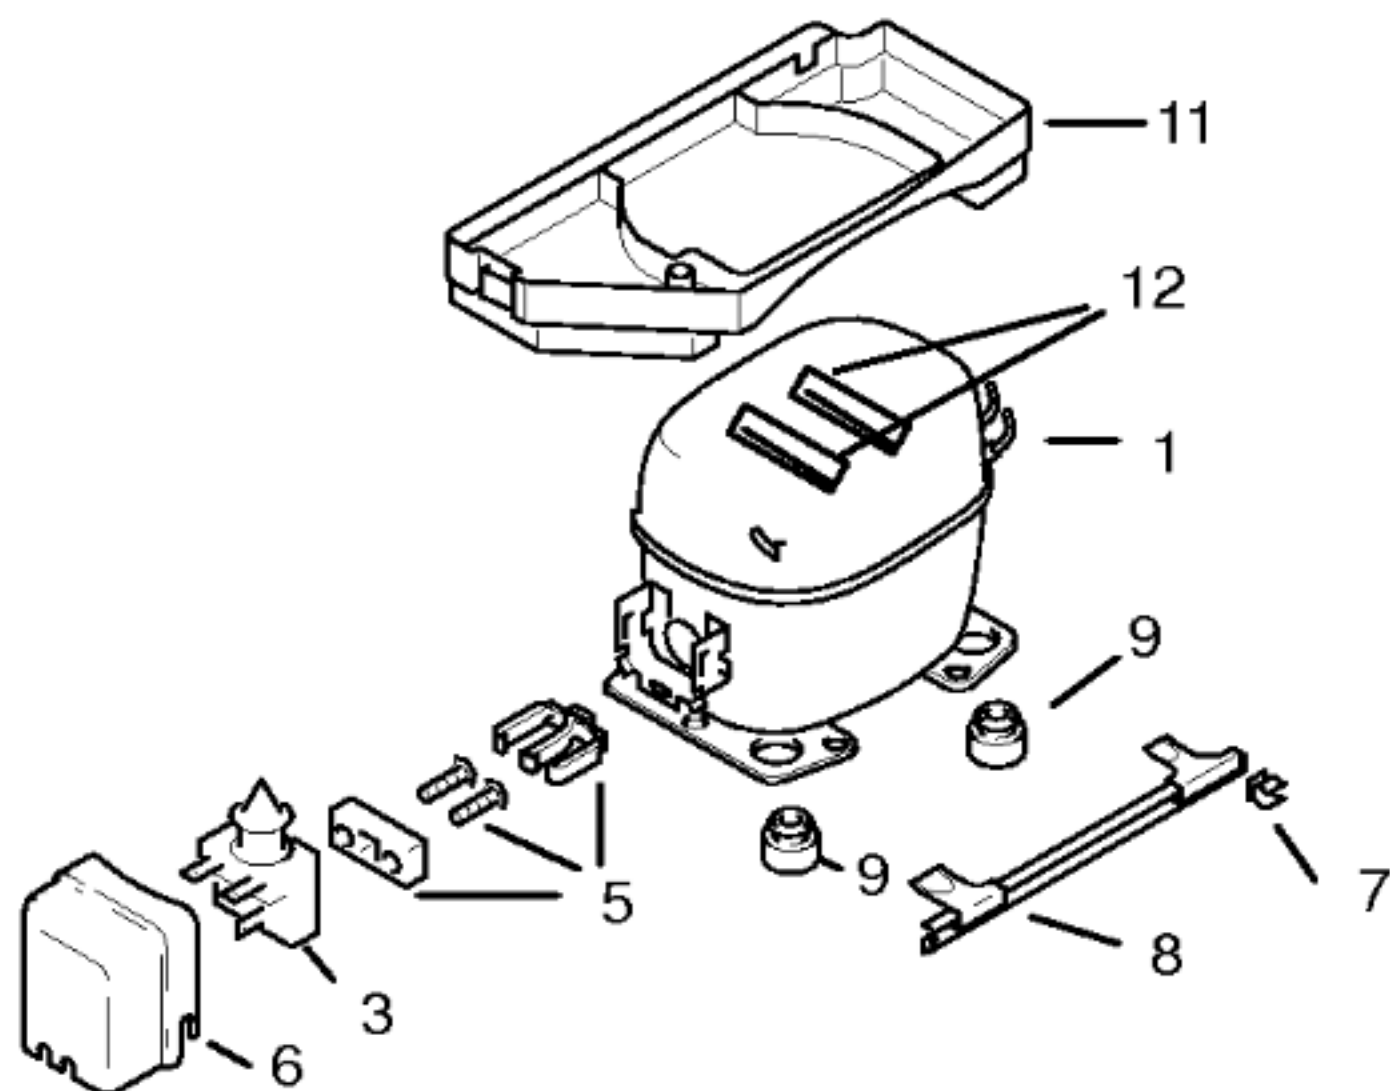

Pos.	V01		
	Goldstar		
	NDA69NAEM		
1	14 2206		
2			
3	17 0743		
4	17 0746		
5	17 0745		
6	17 0744		
7	16 9319		
8	26 4879		
9	05 0166		
10			
11	36 5099		
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Goldstar		
Typ/Type	NDA52NAEM		
Förderleistung/Delivery/Débit	934		
Anlaufstrom/Starting current/Cour de démarrage	A		
Widerstand/Resistance/Résistance Ha/main/prin	Ω 31,5		
Hi/aux	Ω 6,00		
Temp.-Regler/Thermostat	Ranco		
Typ/Type	K59		
Regelstellung/Position	kalt warm		
Schaltwerte/Switching values	"warm" +5,2 +5,2		
Valeurs de commutation	"kalt" -32,0 -15,0		
Füllmenge/Fill.quantity/Charge	R600a	+	
Anschlußwert/Conn.load/Puiss. connectée	W 58		
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Temp.-Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		