




07 4445

35 6504

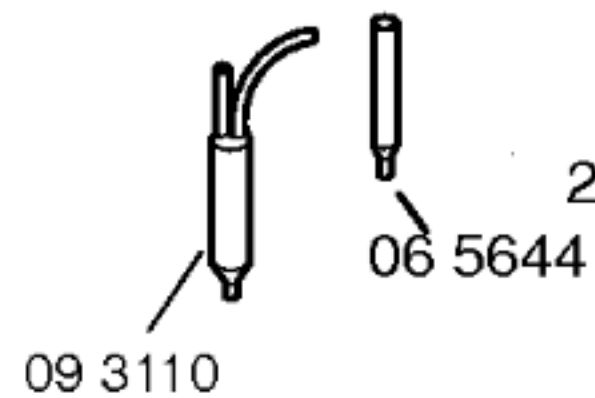


09 3110

06 5644

23 5445

35 3168


35 2476

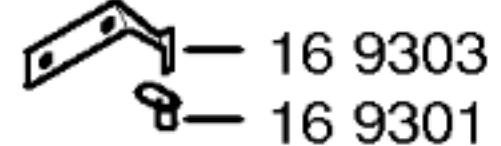

16 9303


16 9301

16 9300

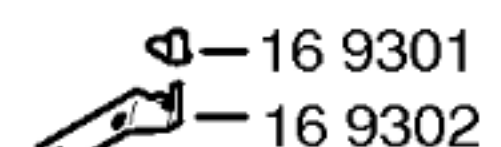


16 9301

16 9302

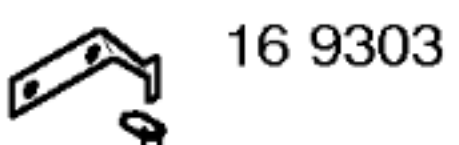

16 9303

16 9301

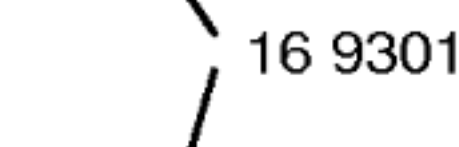

16 9301

16 9302



16 9302


16 9301

16 9302

17 3673

17 3675

28 8893

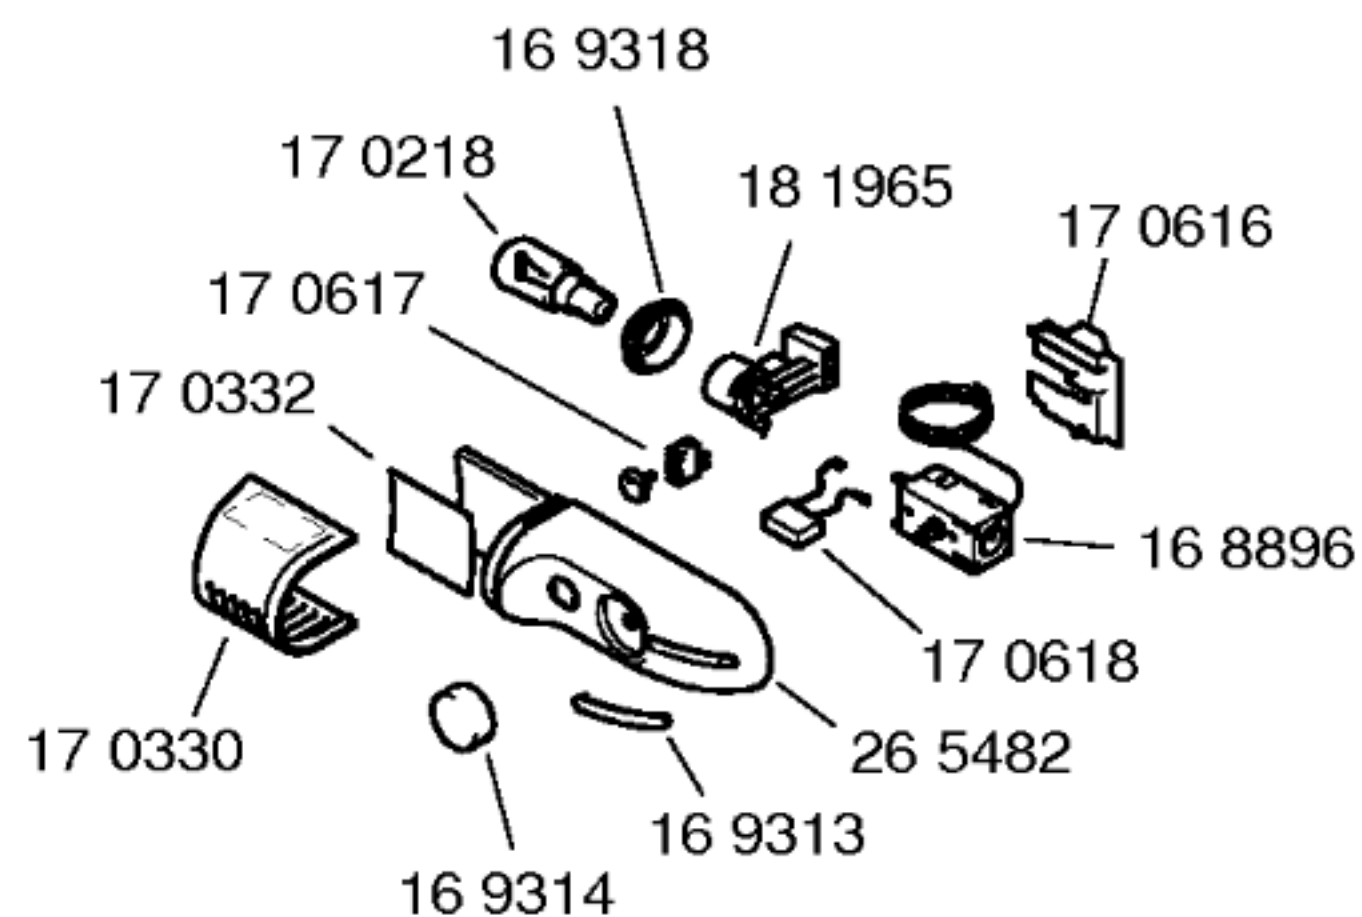

16 9318

17 0218

17 0617

17 0332

17 0330

16 9314

16 9313


26 5482

17 0618


16 8896

18 1965

17 0616

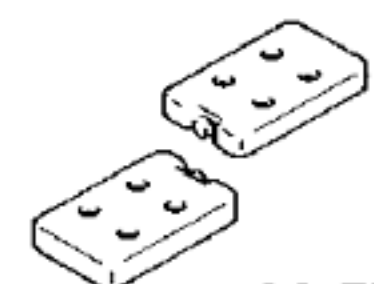

08 5716

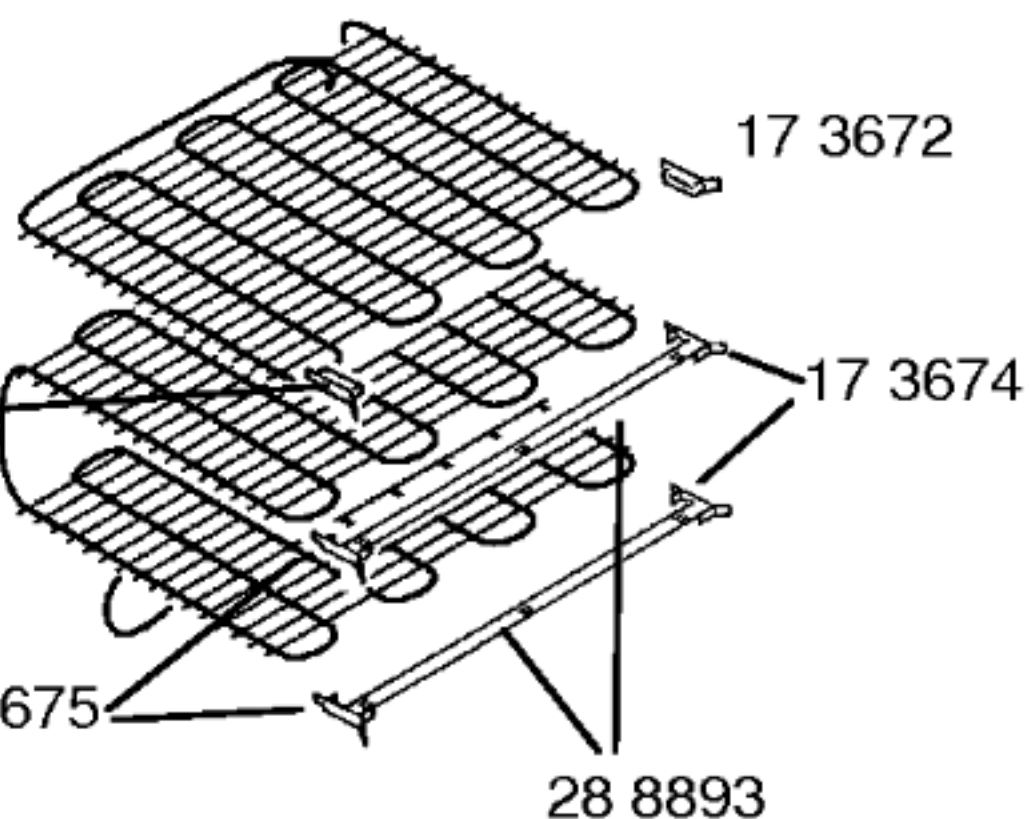

17 3672

17 3674






10 6850



Gebrauchsanweisung
52 5556
(D,GB,F,I,NL,S,E,DK,N,,SF)

Montageanleitung
52 1893
(D,GB,F,I,NL,S,E,DK,N,,SF)

Listerien Rep.Satz
41 7589

Befestigungssatz
26 7361

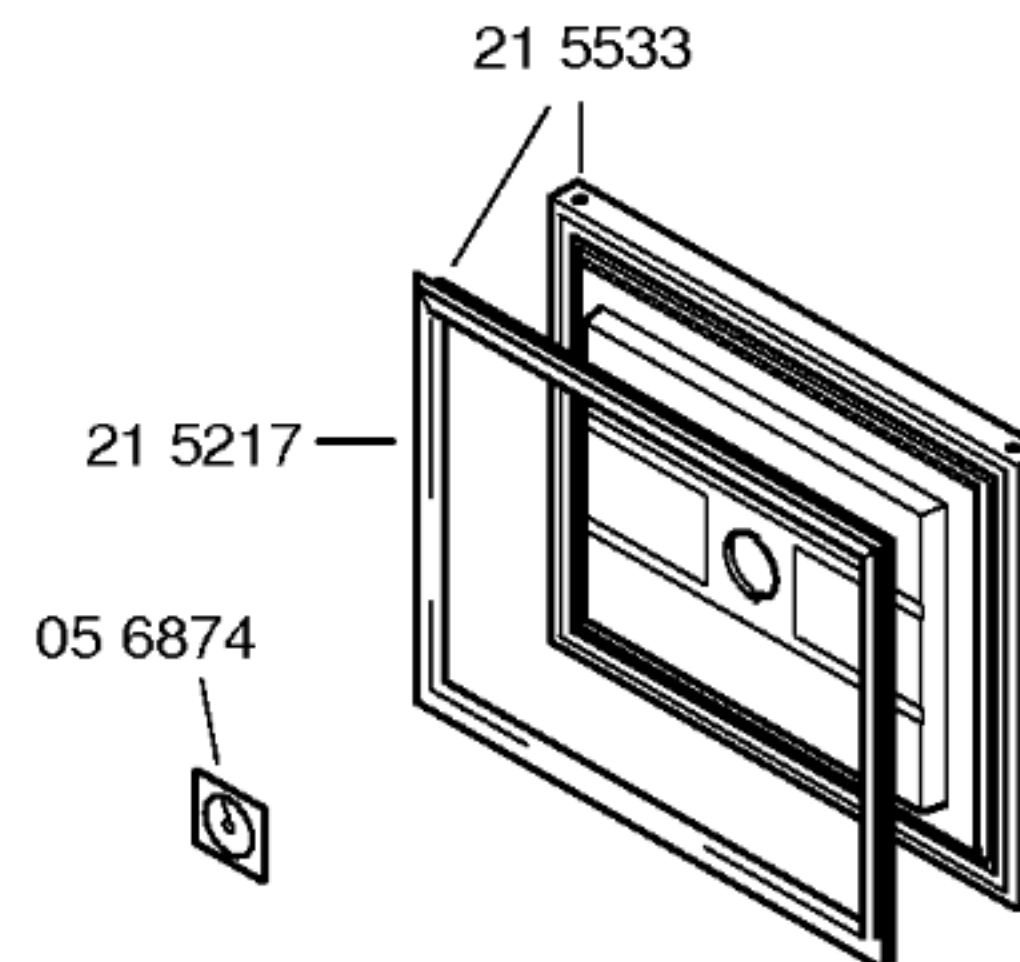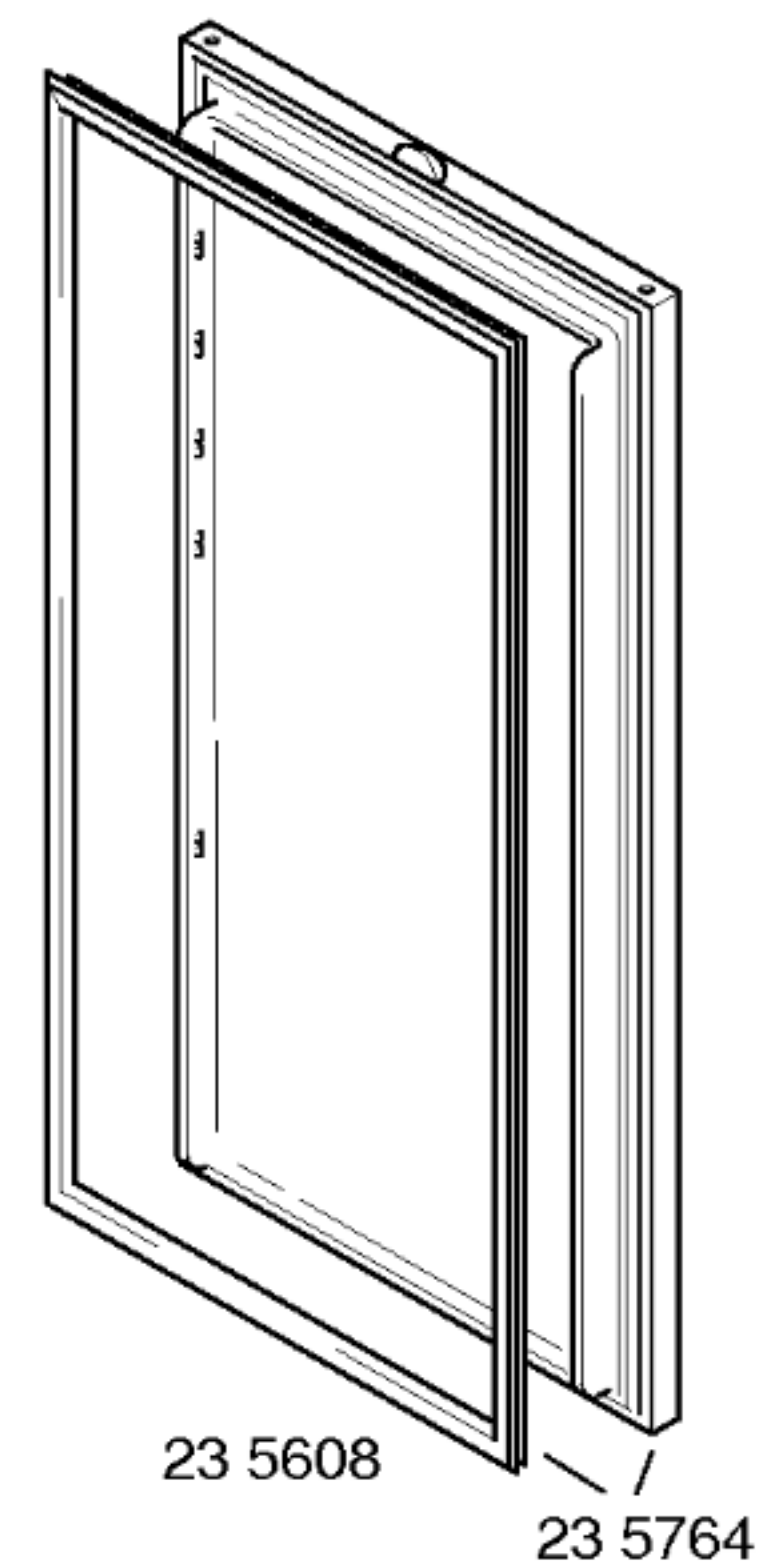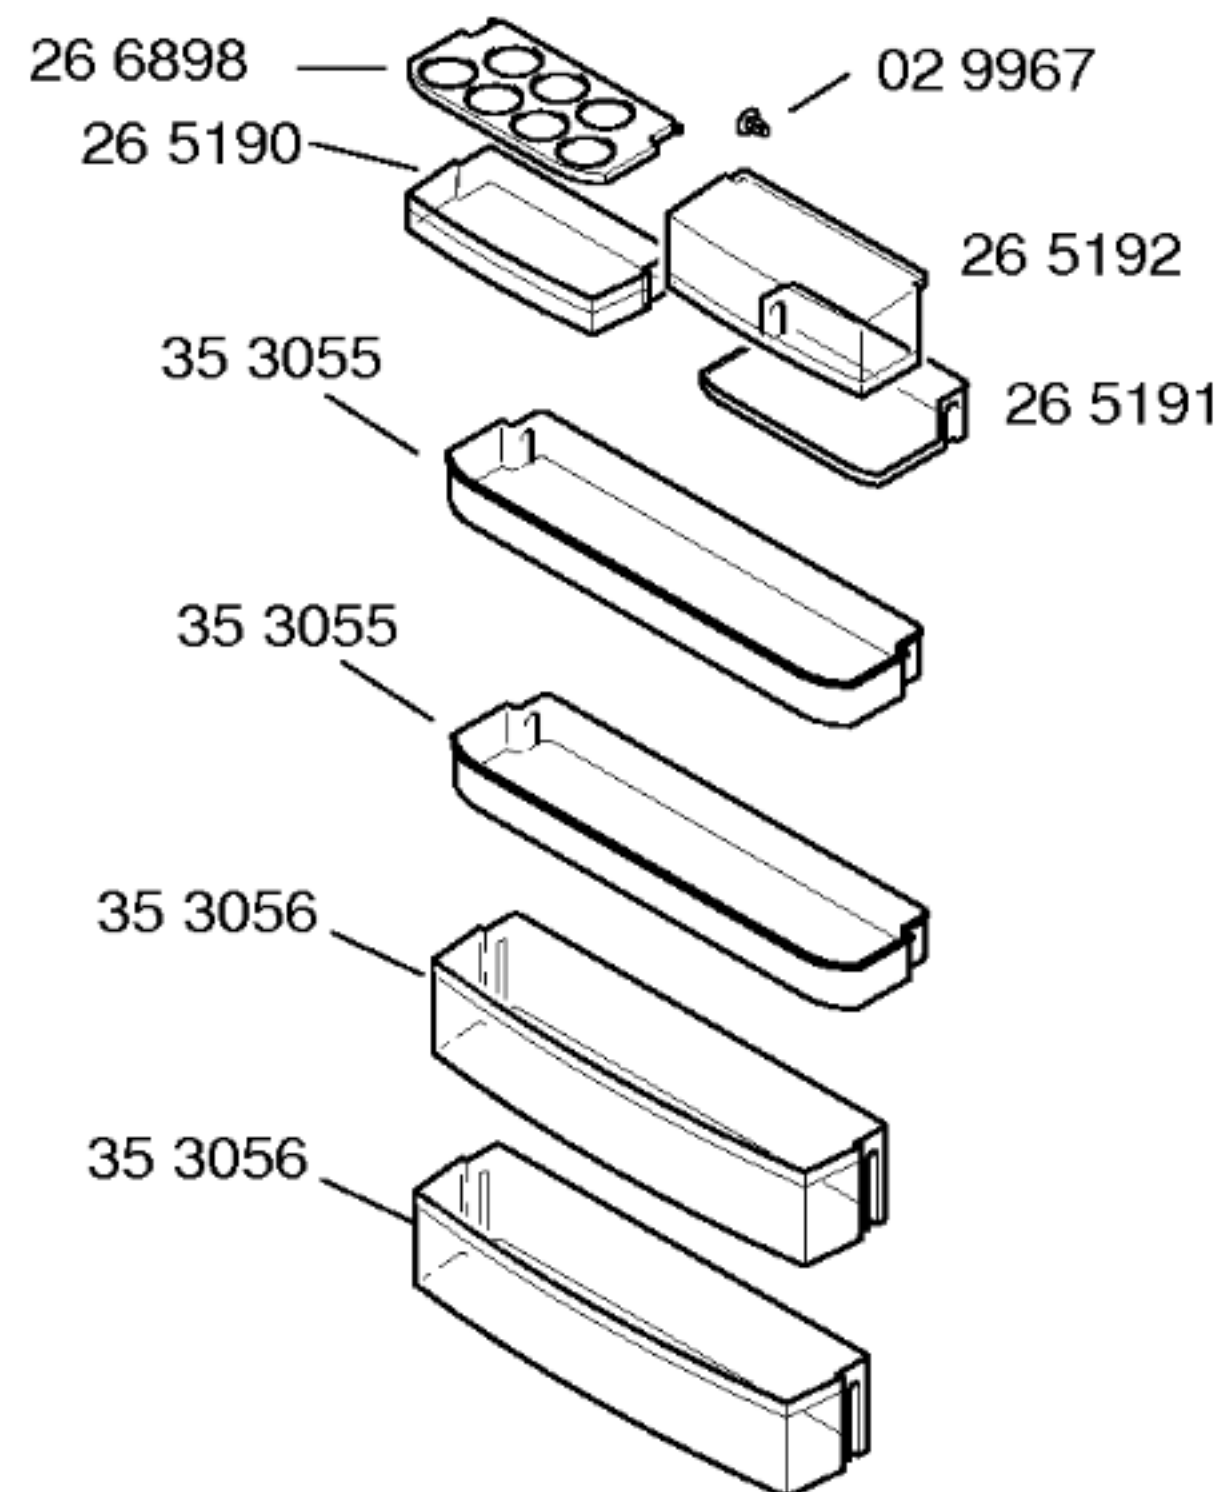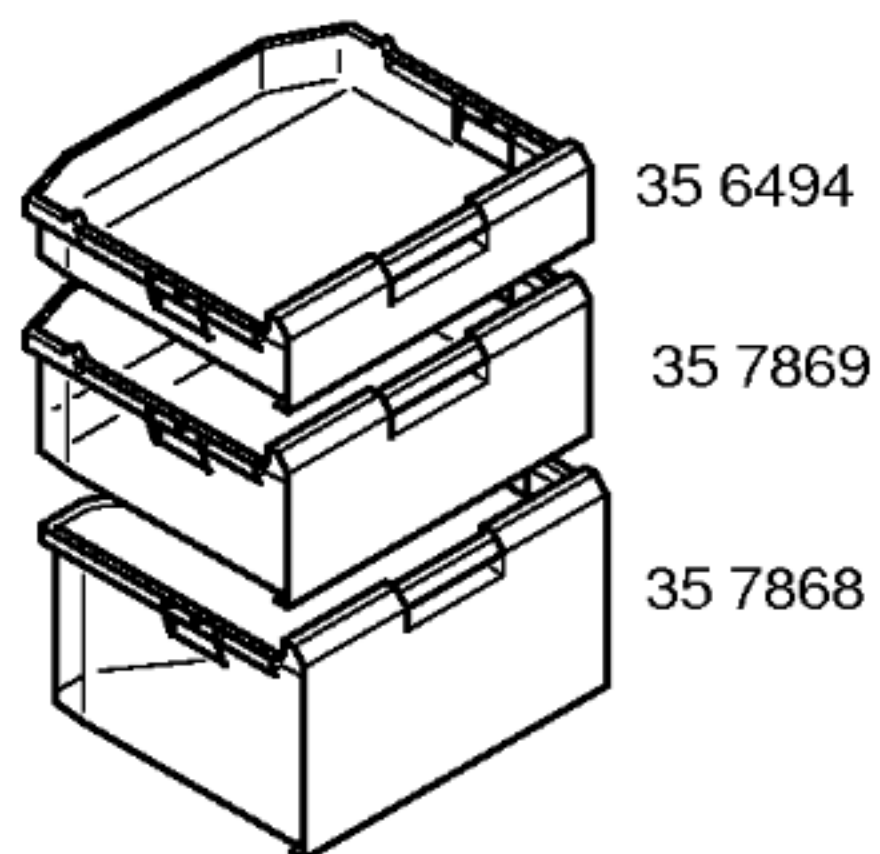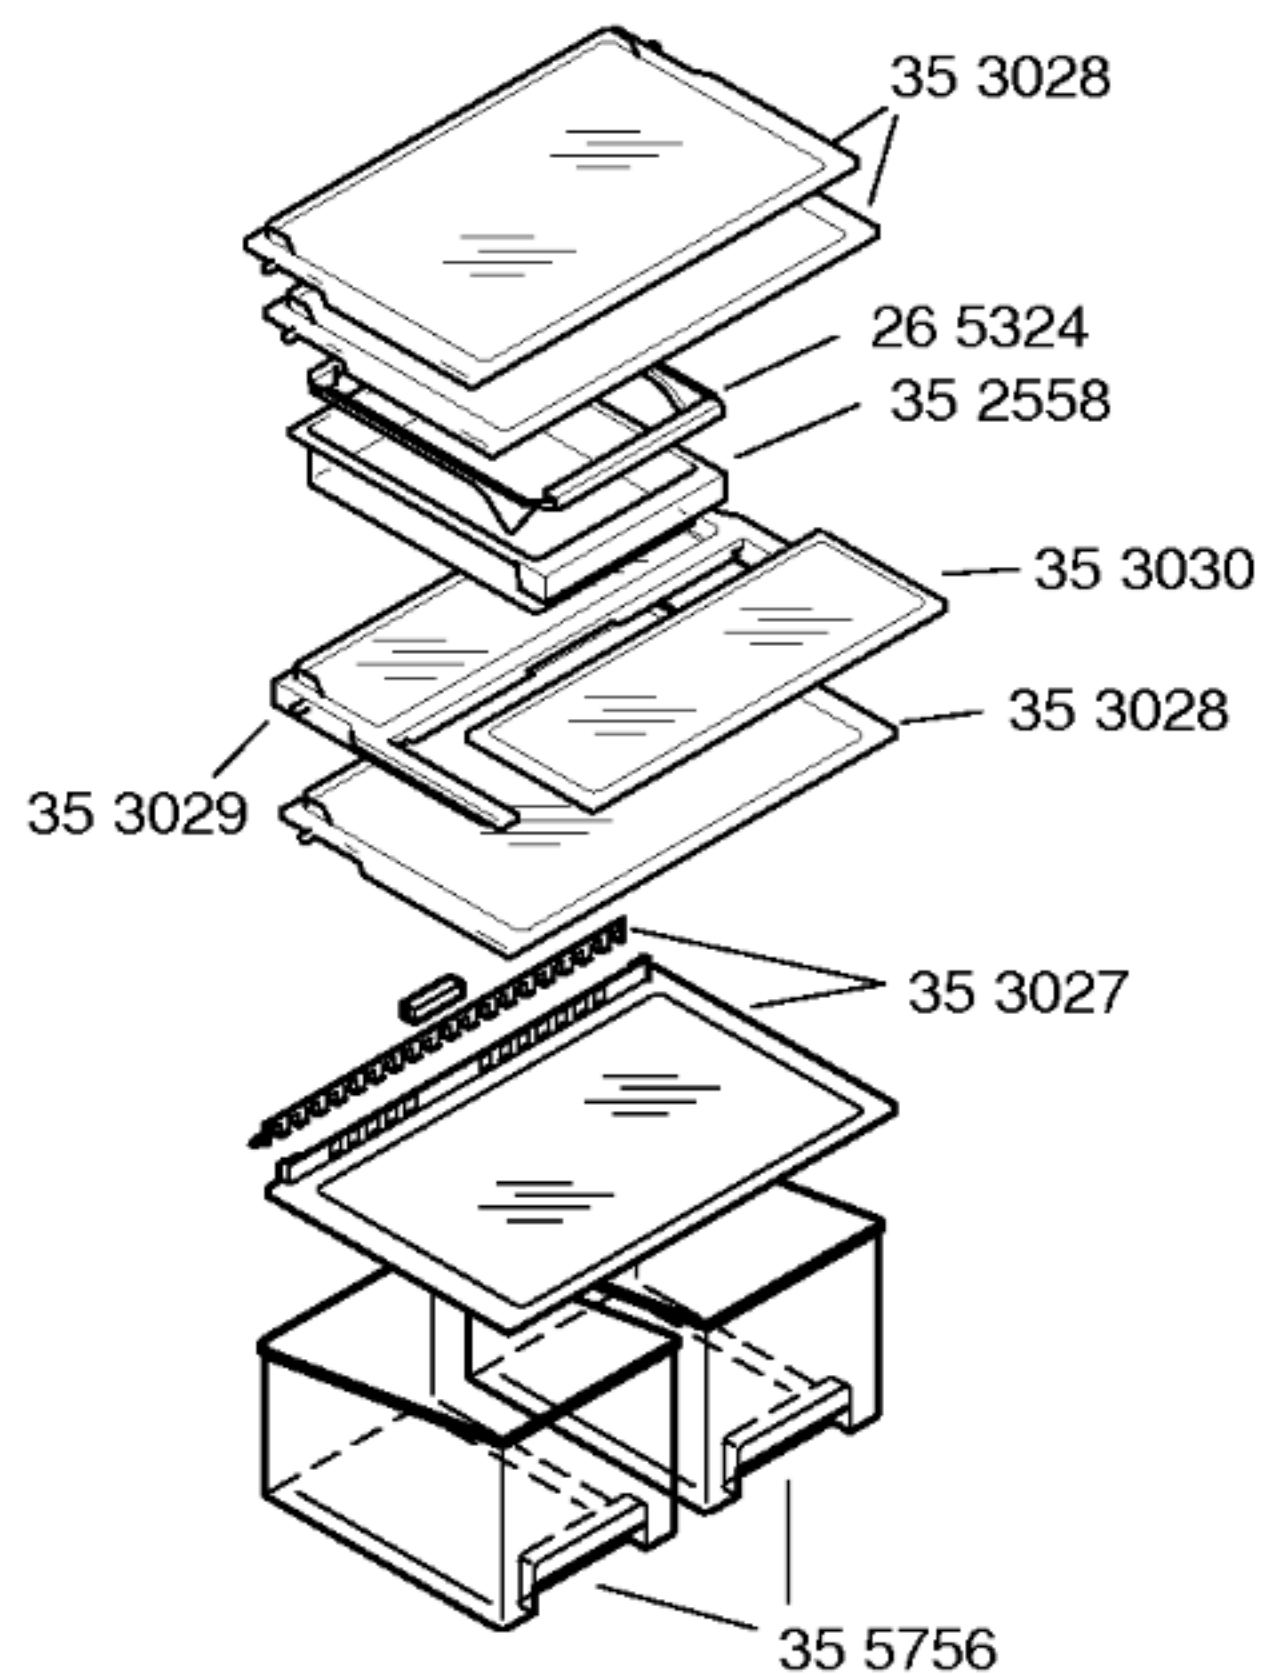

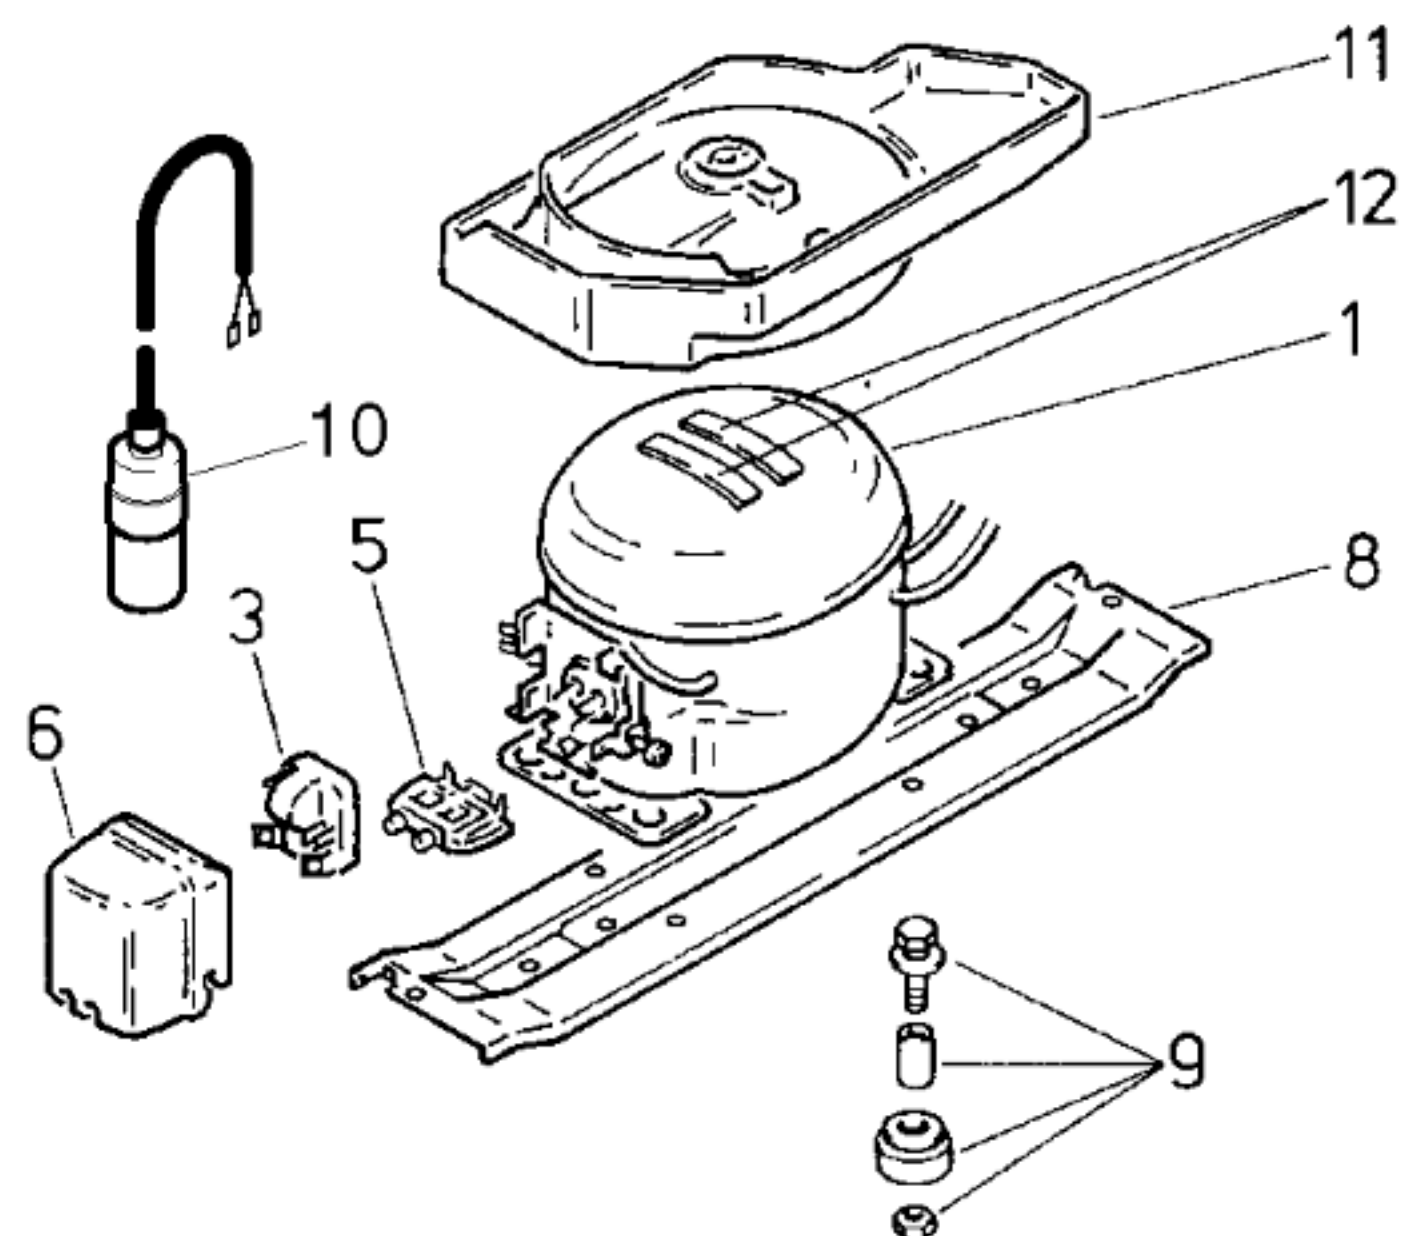

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		DC125E		
Förderleistung/Delivery/Débit	l/h	2246		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,2		
Widerstand/Resistance/Résistance	Ha/main/prin.	12,1		
	Hi/aux	13,8		
Temp.-Regler/Thermostat		RCO K59		
Typ/Type		KER		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ °C	+4,5	+4,5	
Valeurs de commutation	„aus“	-32,0	-21	
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild

Pos.	V01		
	Matsushita		
	DC125E		
1	14 2131		
2			
3	17 2967		
4			
5	16 2549		
6	16 6782		
7			
8	28 1825		
9	05 0166		
10			
11	26 6624		
12	05 6008		