

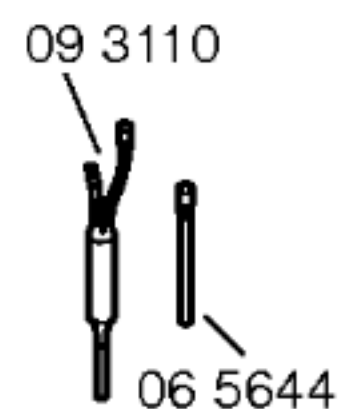


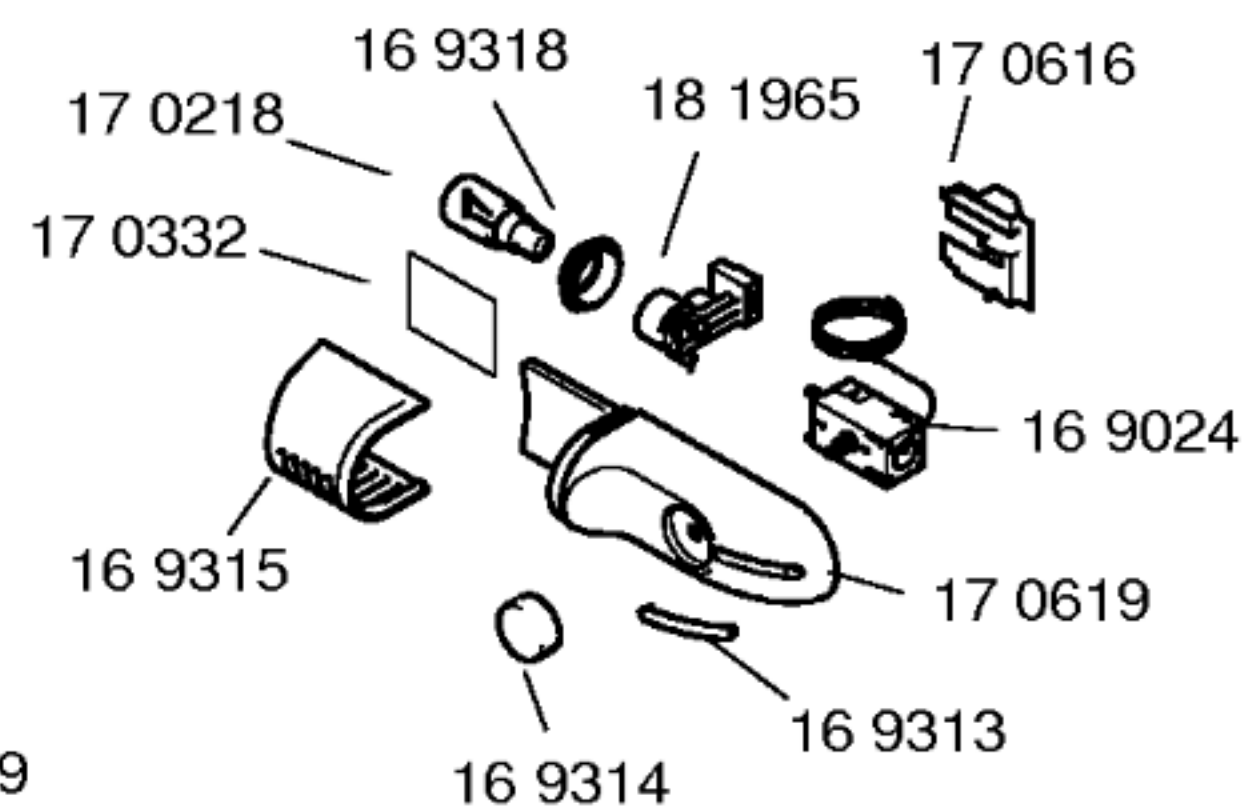

07 4445

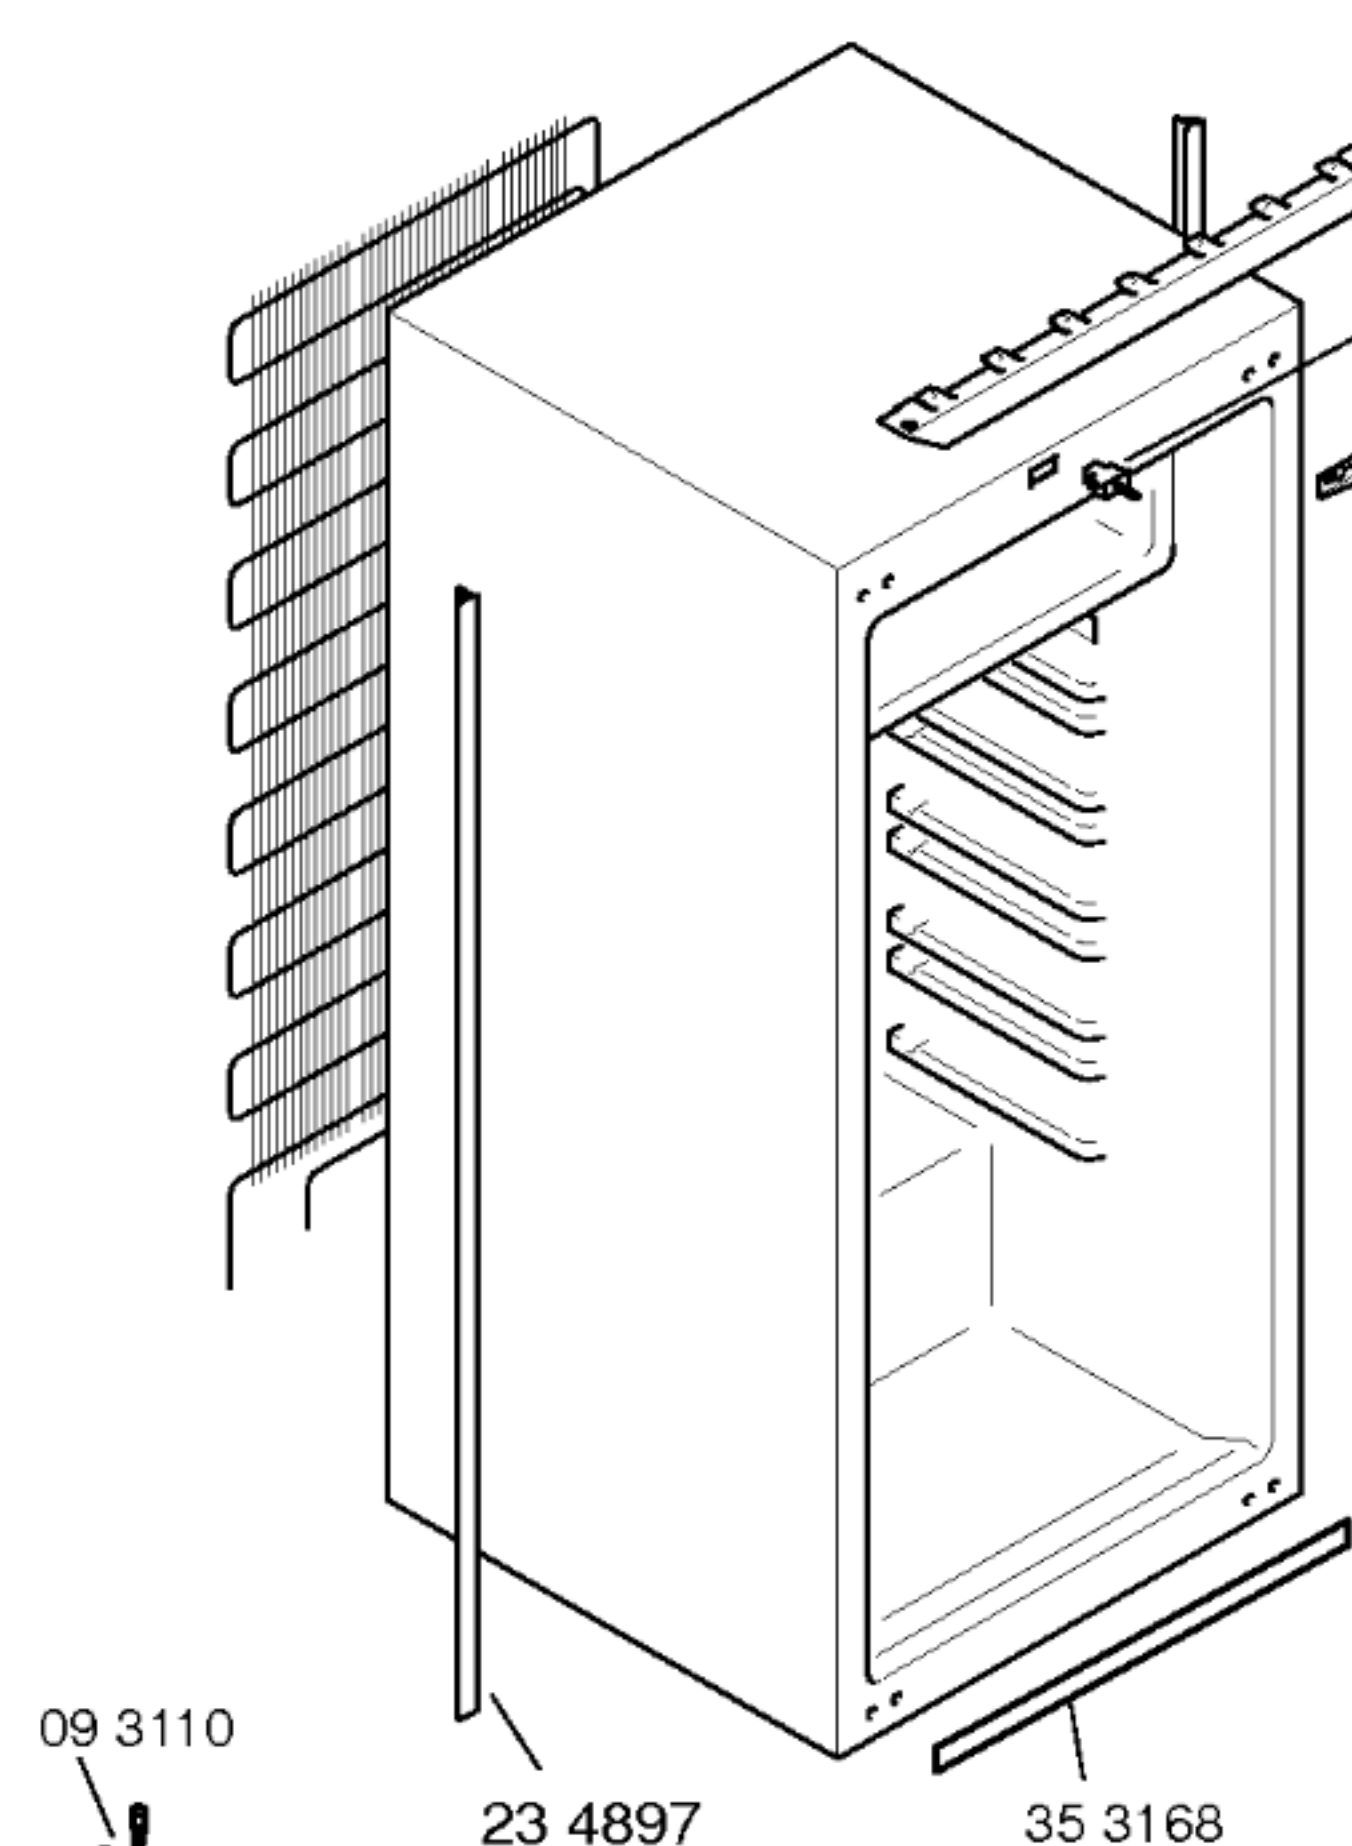


Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
58 6318
(DE,EN,FR,IT,NL)

Montageanleitung
52 1893
(DE,EN,FR,IT,NL,DA
NO,FI,SE,TR)

Beistellsatz
26 4862

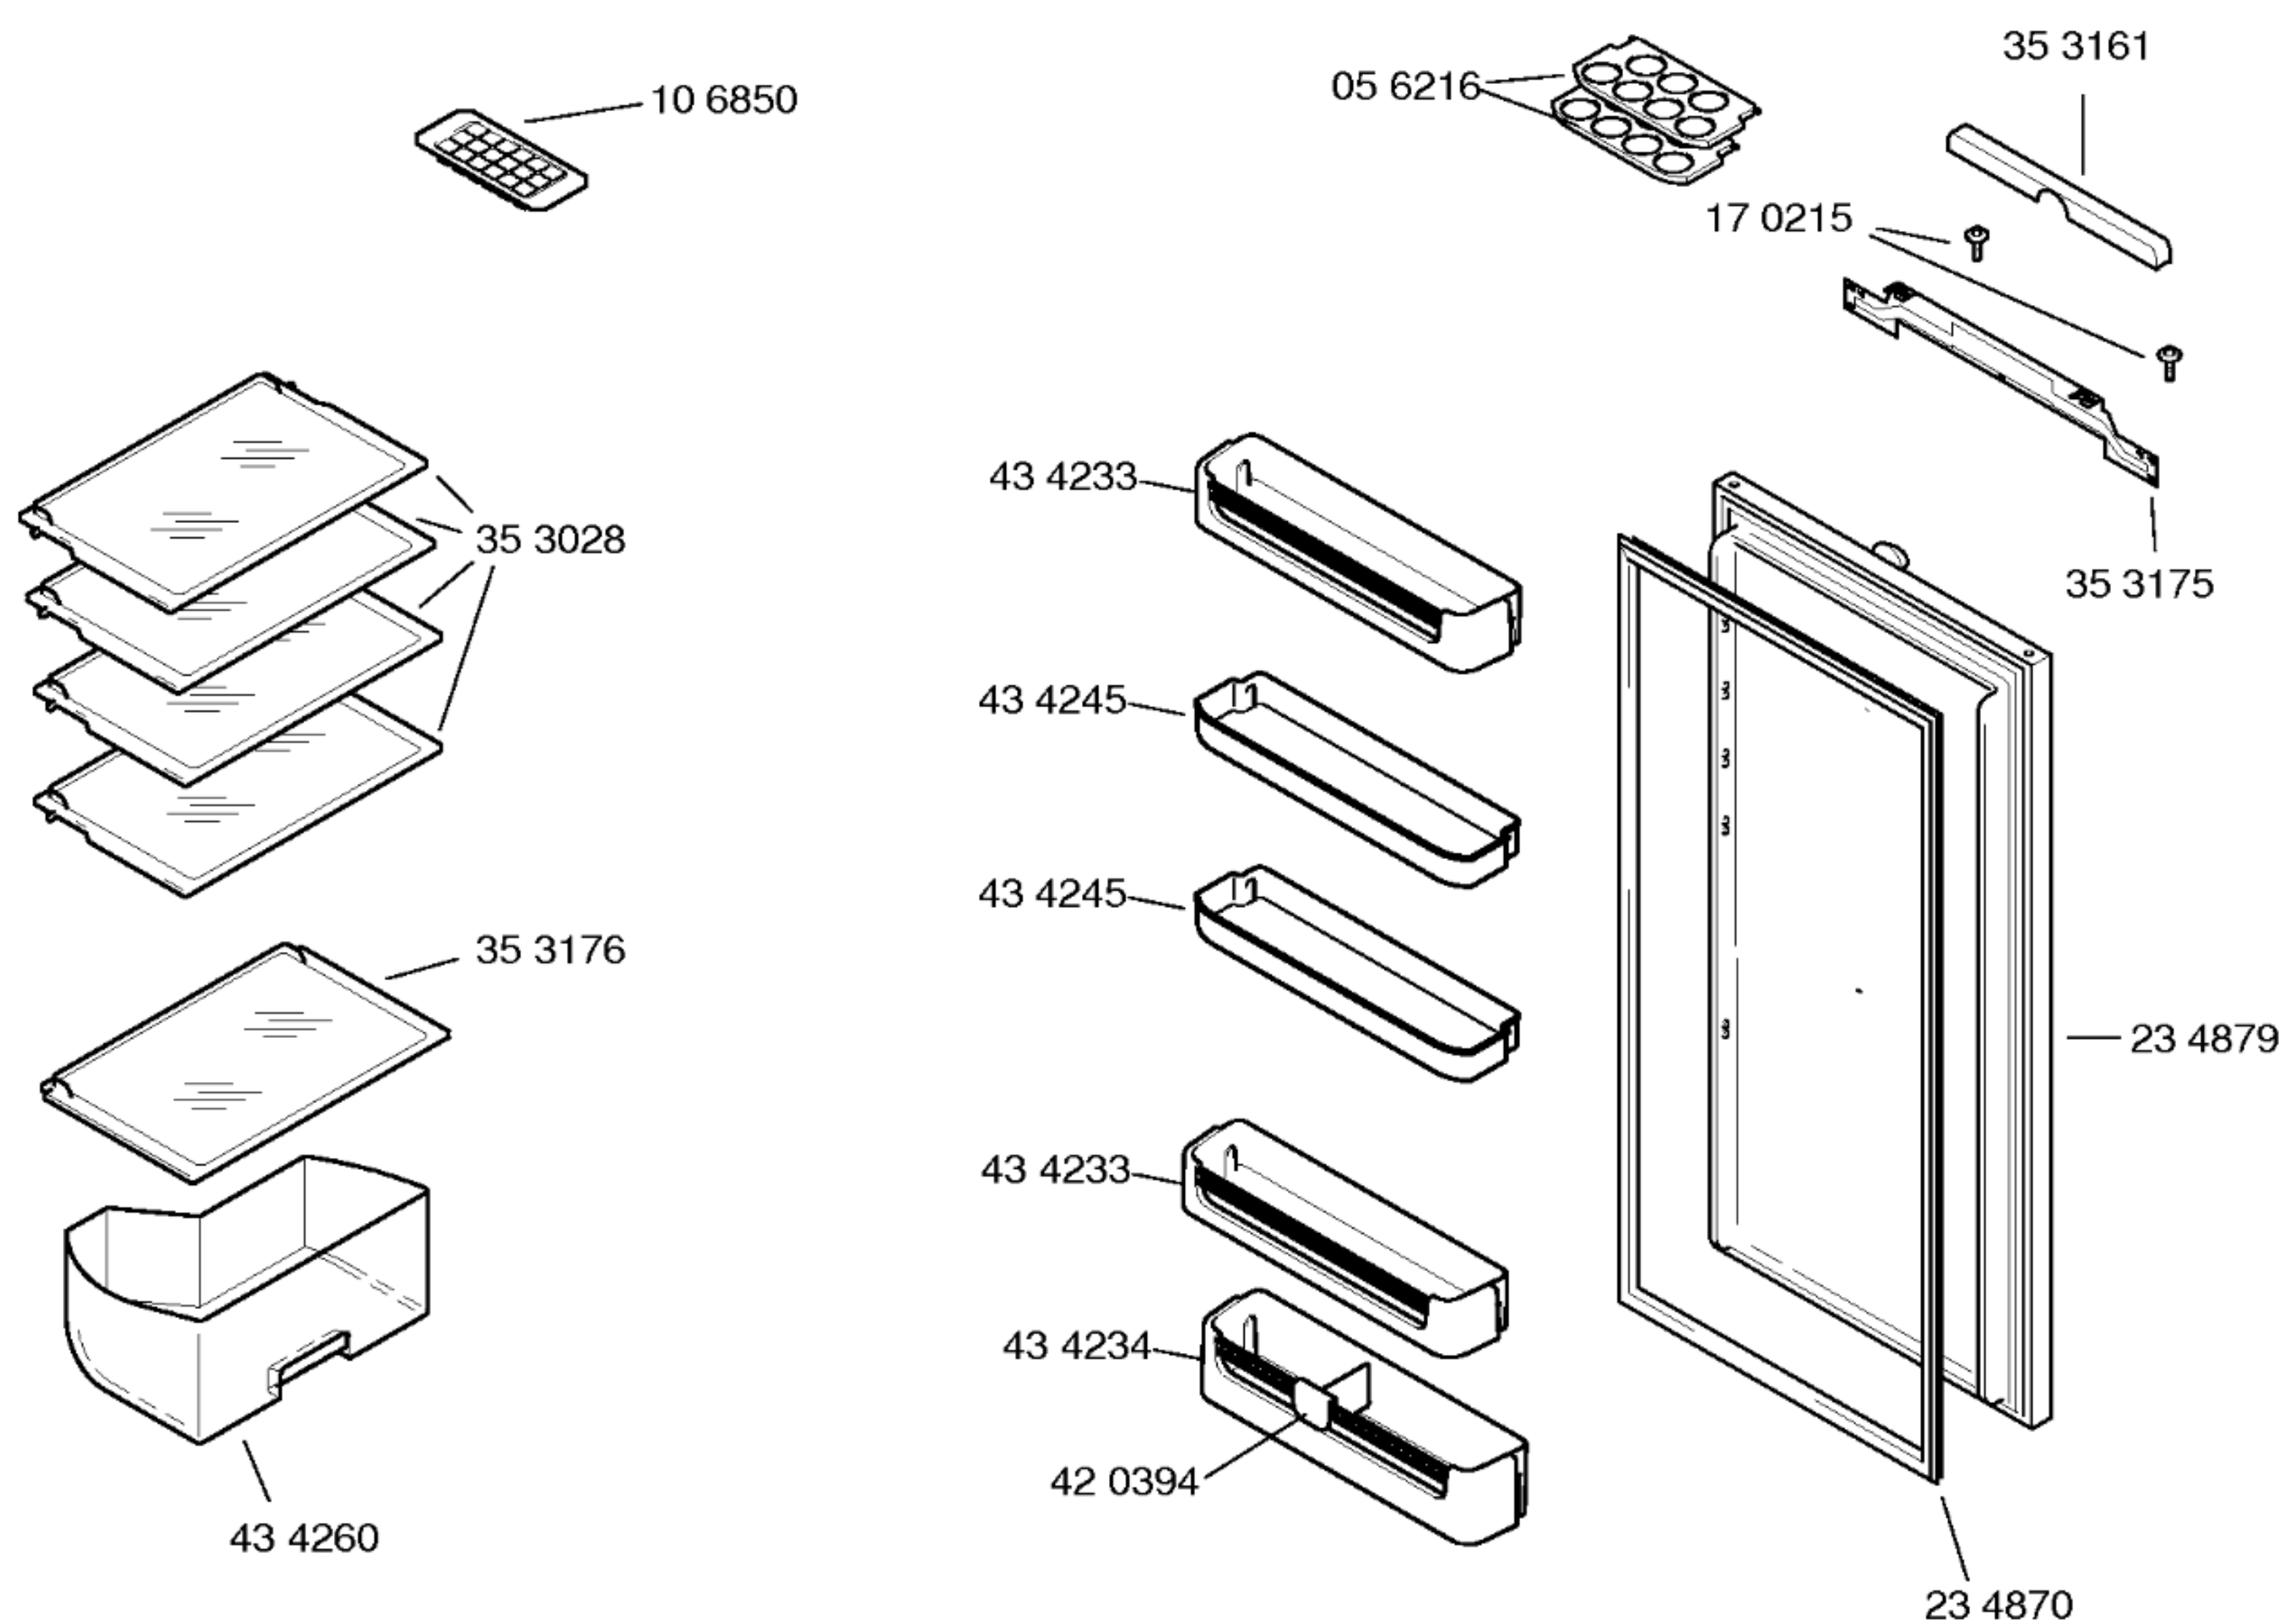

Mat. – Nr. – Konstante
3740

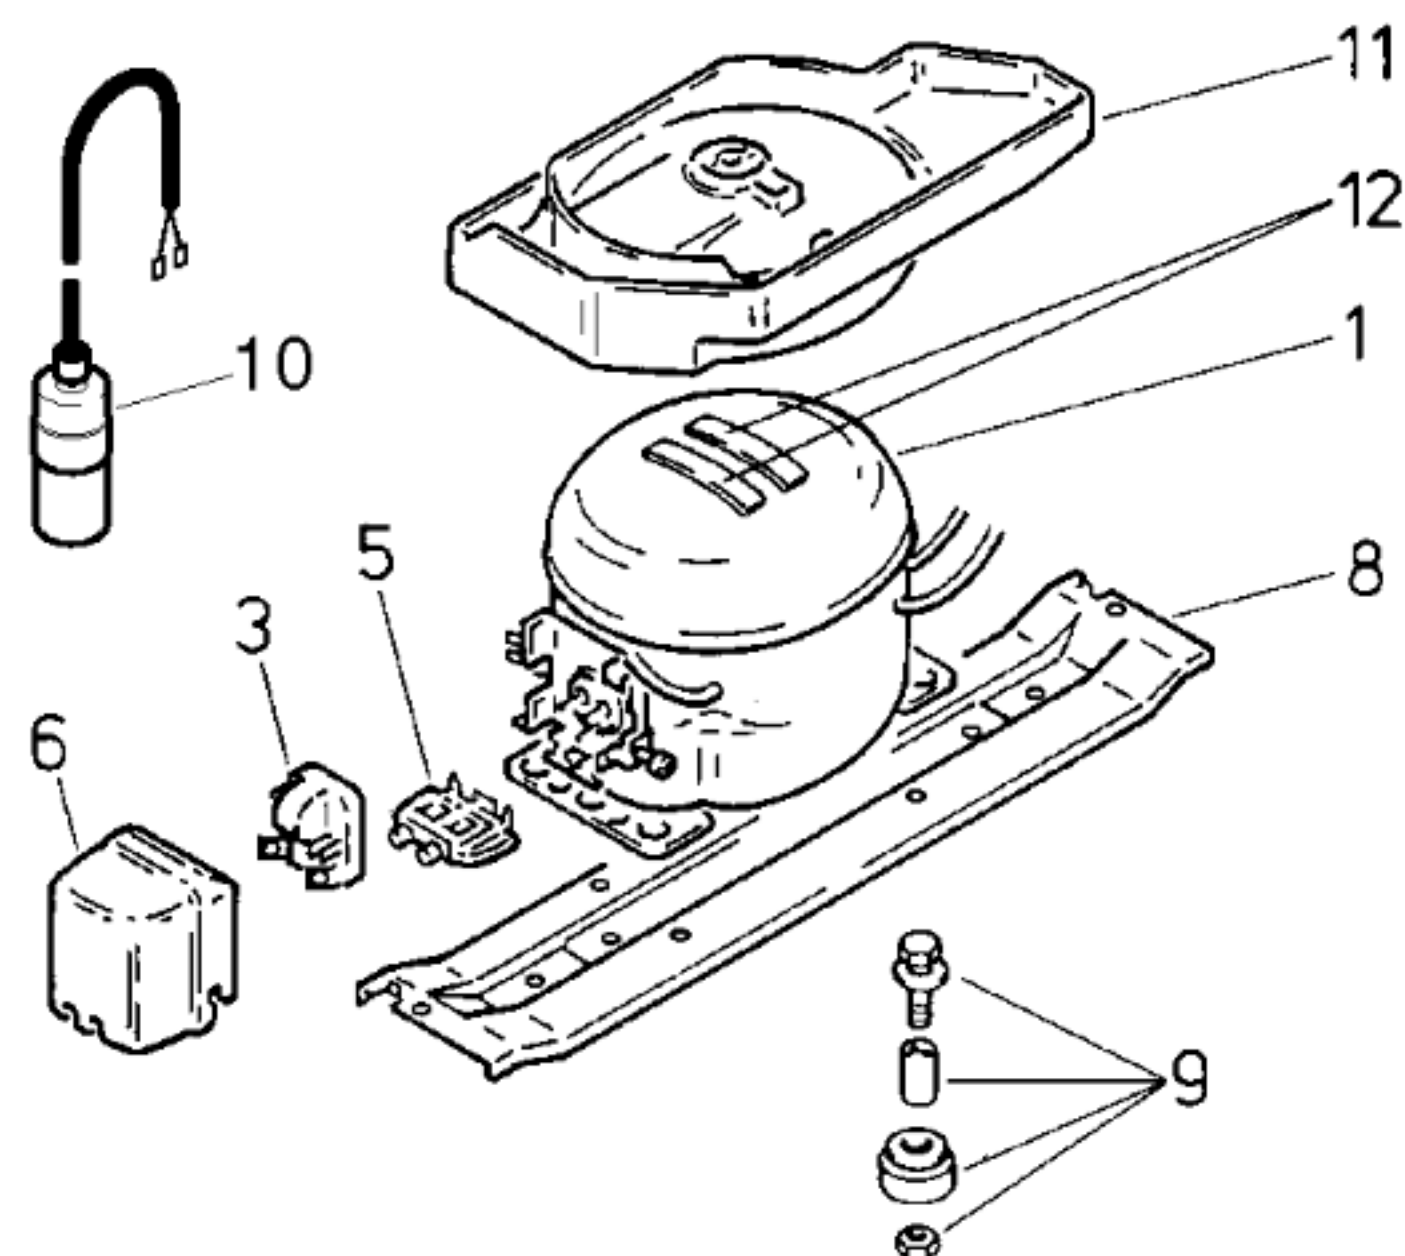Mat. – Nr. – Konstante
3740

	V01,V02	V03	
Pos.	Danfoss	Goldstar	
	TLES7KK2	NDA69NAEM	
1	14 1903	14 1903	
2			
3	15 1055	17 0743	
4			
5	15 0760	17 0745	
6	15 1072	17 0744	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	0 50166	0 50166	
10			
11	36 5099	36 5099	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Danfoss	Goldstar	
Typ/Type	TLES7KK2	NDA69NAEM	
Förderleistung/Delivery/Débit	l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage	A	8,8	
Widerstand/Resistance/Résistance	Ω	18,9	
Hi/aux	Ω	15,3	
Temp.–Regler/Thermostat	Ranco		
Typ/Type	K59		
Regelstellung/Position	kalt	warm	
Schaltwerte/Switching values	"warm"	+4,0	
Valeurs de commutation	"kalt"	–32,0	
	"alarm"	–12,0	
Füllmenge/Fill.quantity/Charge	R600a	*	
Anschlußwert/Conn.load/Puiss. connectée	W	75	83
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Temp.–Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild