


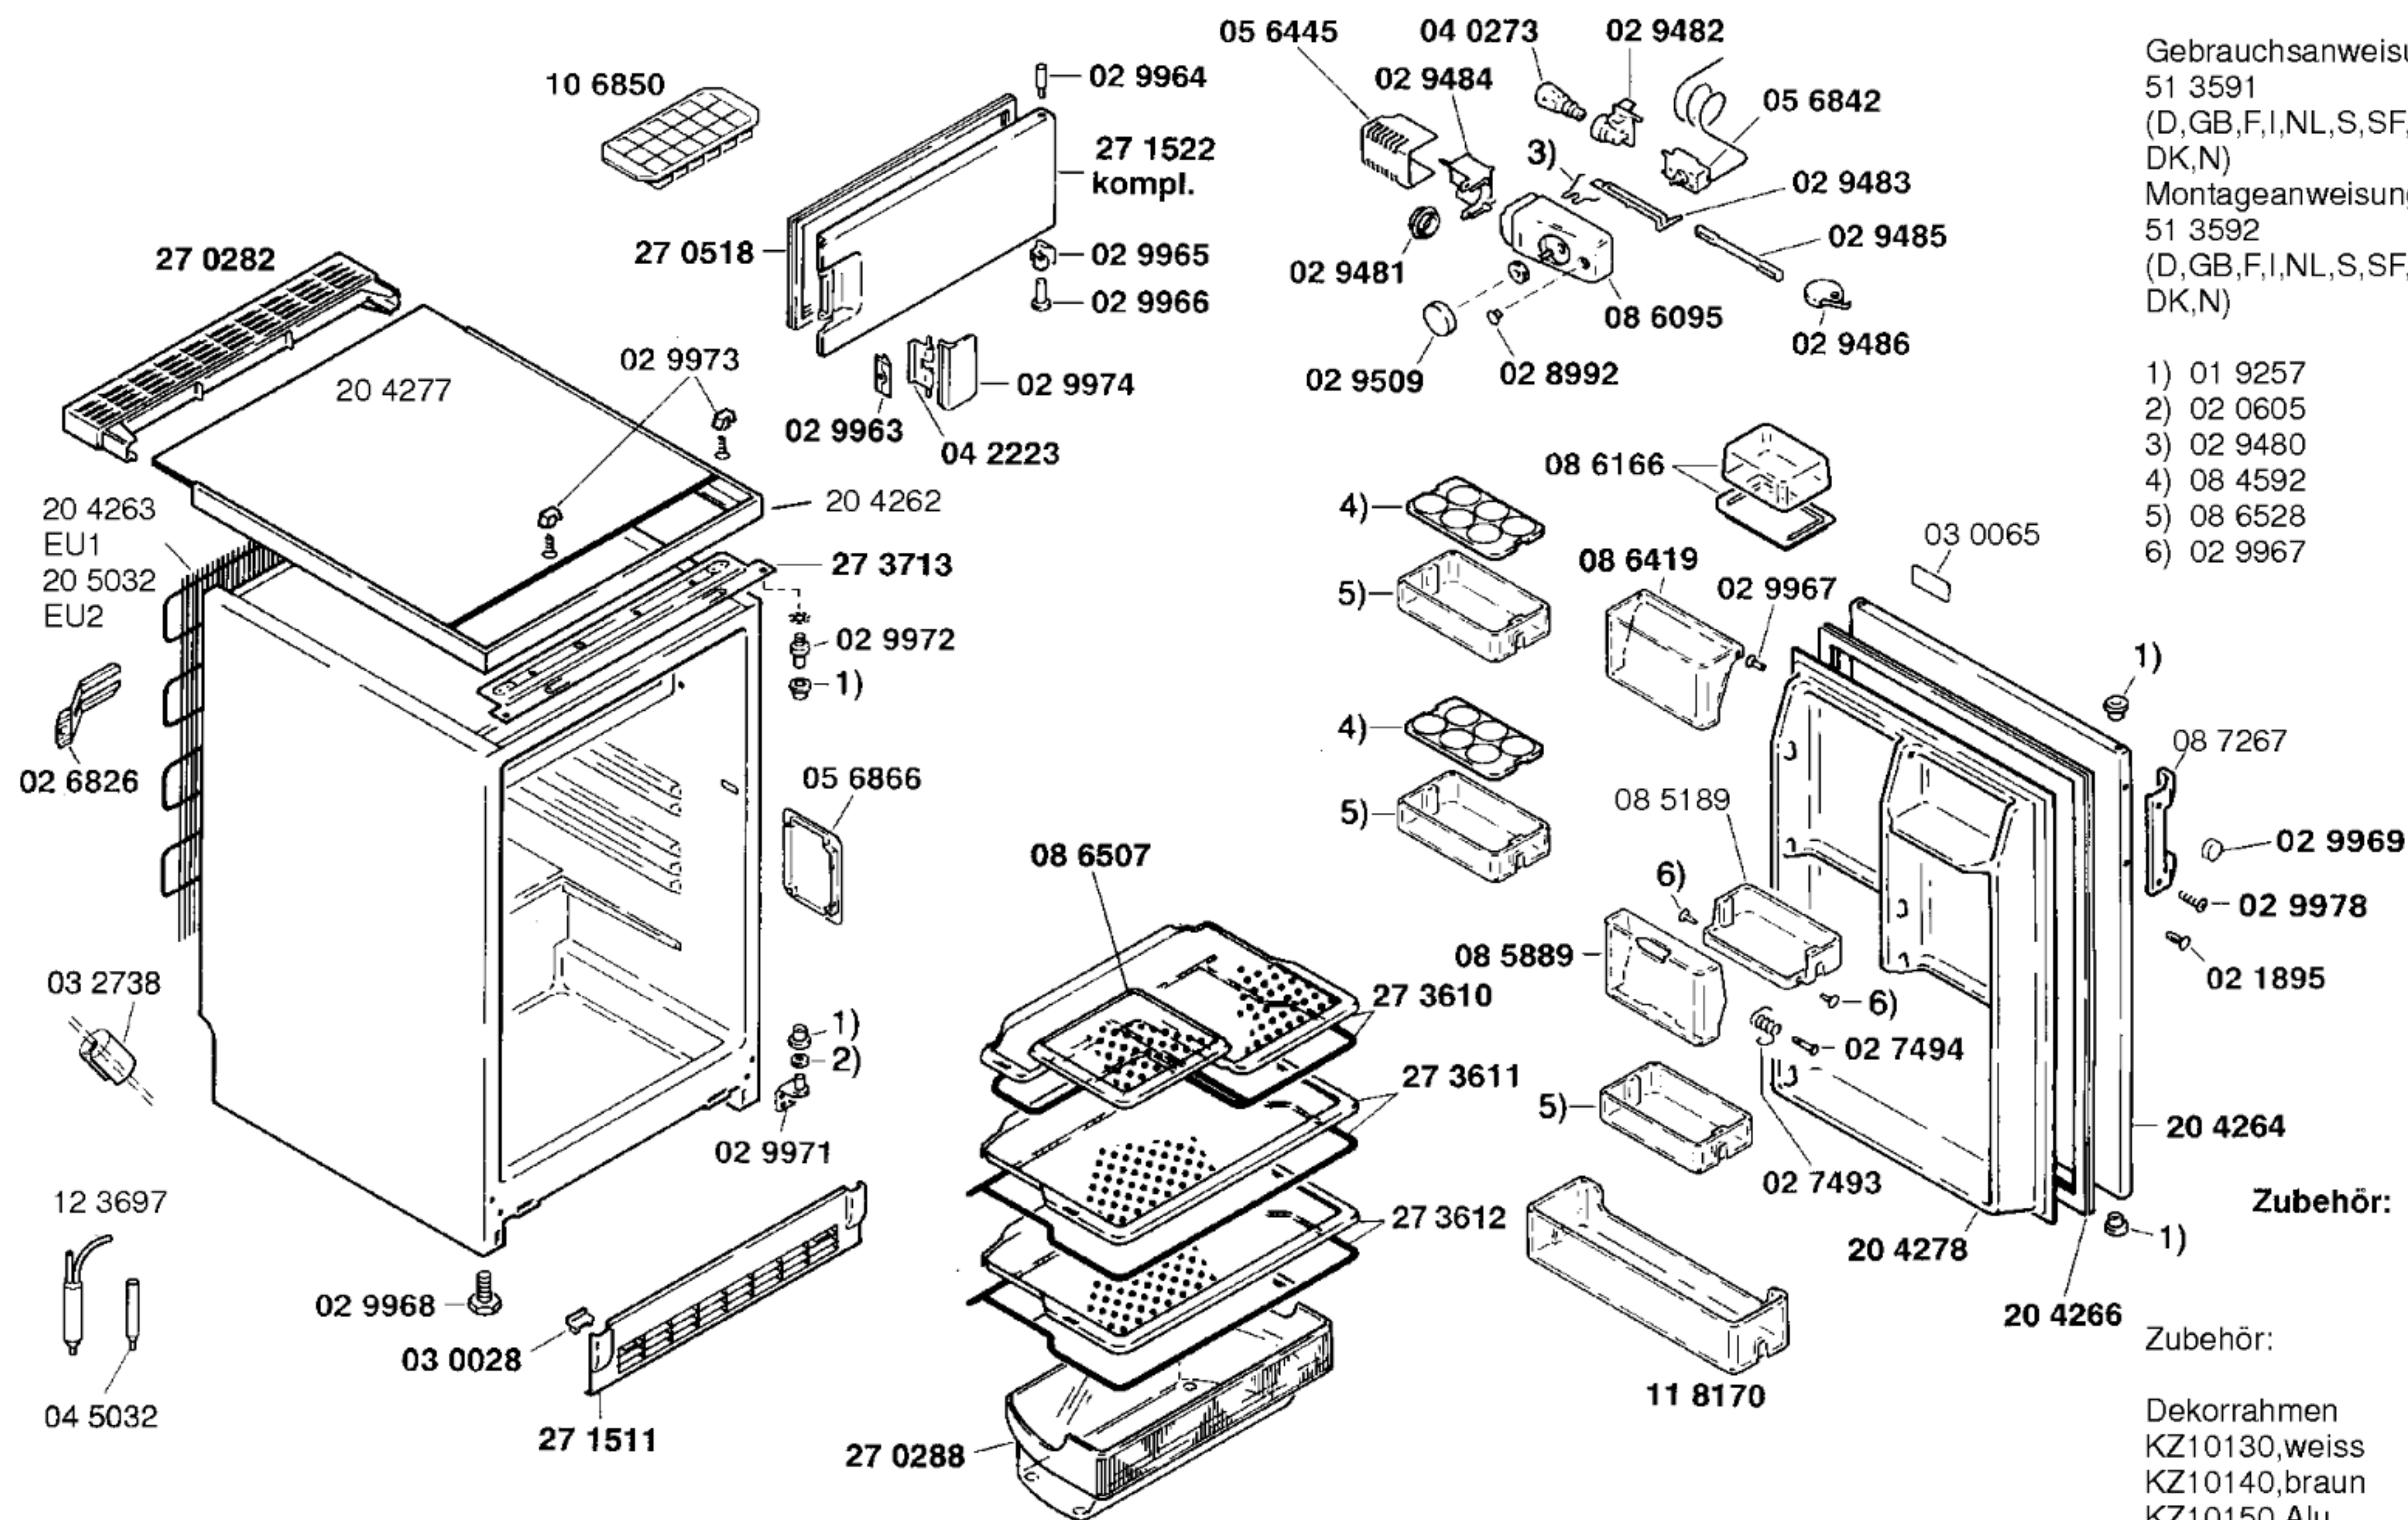


Gebrauchsanweisung
51 3591
(D,GB,F,I,NL,S,SF,E,P,
DK,N)
Montageanweisung
51 3592
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

- 1) 01 9257
- 2) 02 0605
- 3) 02 9480
- 4) 08 4592
- 5) 08 6528
- 6) 02 9967

Zubehör:

Zubehör:

Dekorrahmen
KZ10130, weiss
KZ10140, braun
KZ10150, Alu
Sockel
KZ11120

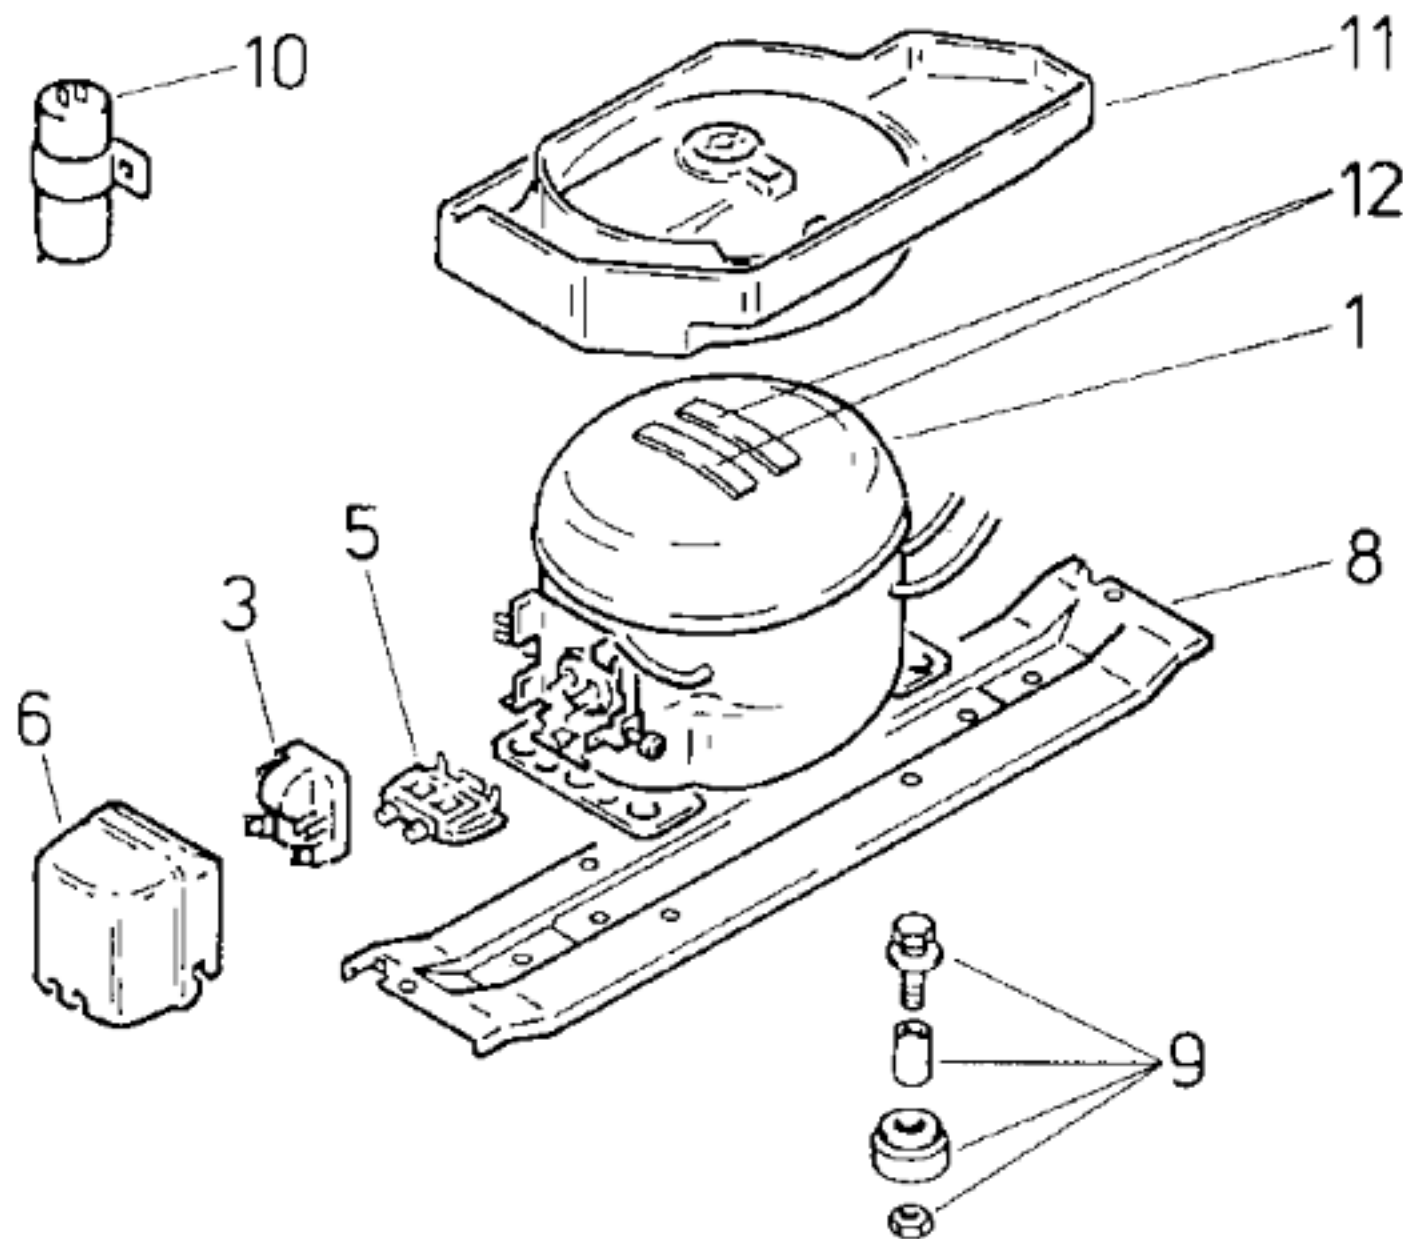

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit	l/h	695	641	
Anlaufstrom/Starting current/Cour. de démarrage	A	8,3	5,7	
Widerstand/Resistance/Résistance	Ha/main/prin.	23,4	24,4	
	Hi/aux	15,5	39,8	
Temp. Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/	„ein“ °C	+ 4,5 + 4,5		
Valeurs de commutation	„aus“	- 31,0 - 13,5		
	(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	R12	g	125	
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance	Resistance	Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	EU1	EU2	
	Danfoss	Matsushita	
	TL 4 A	S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	