


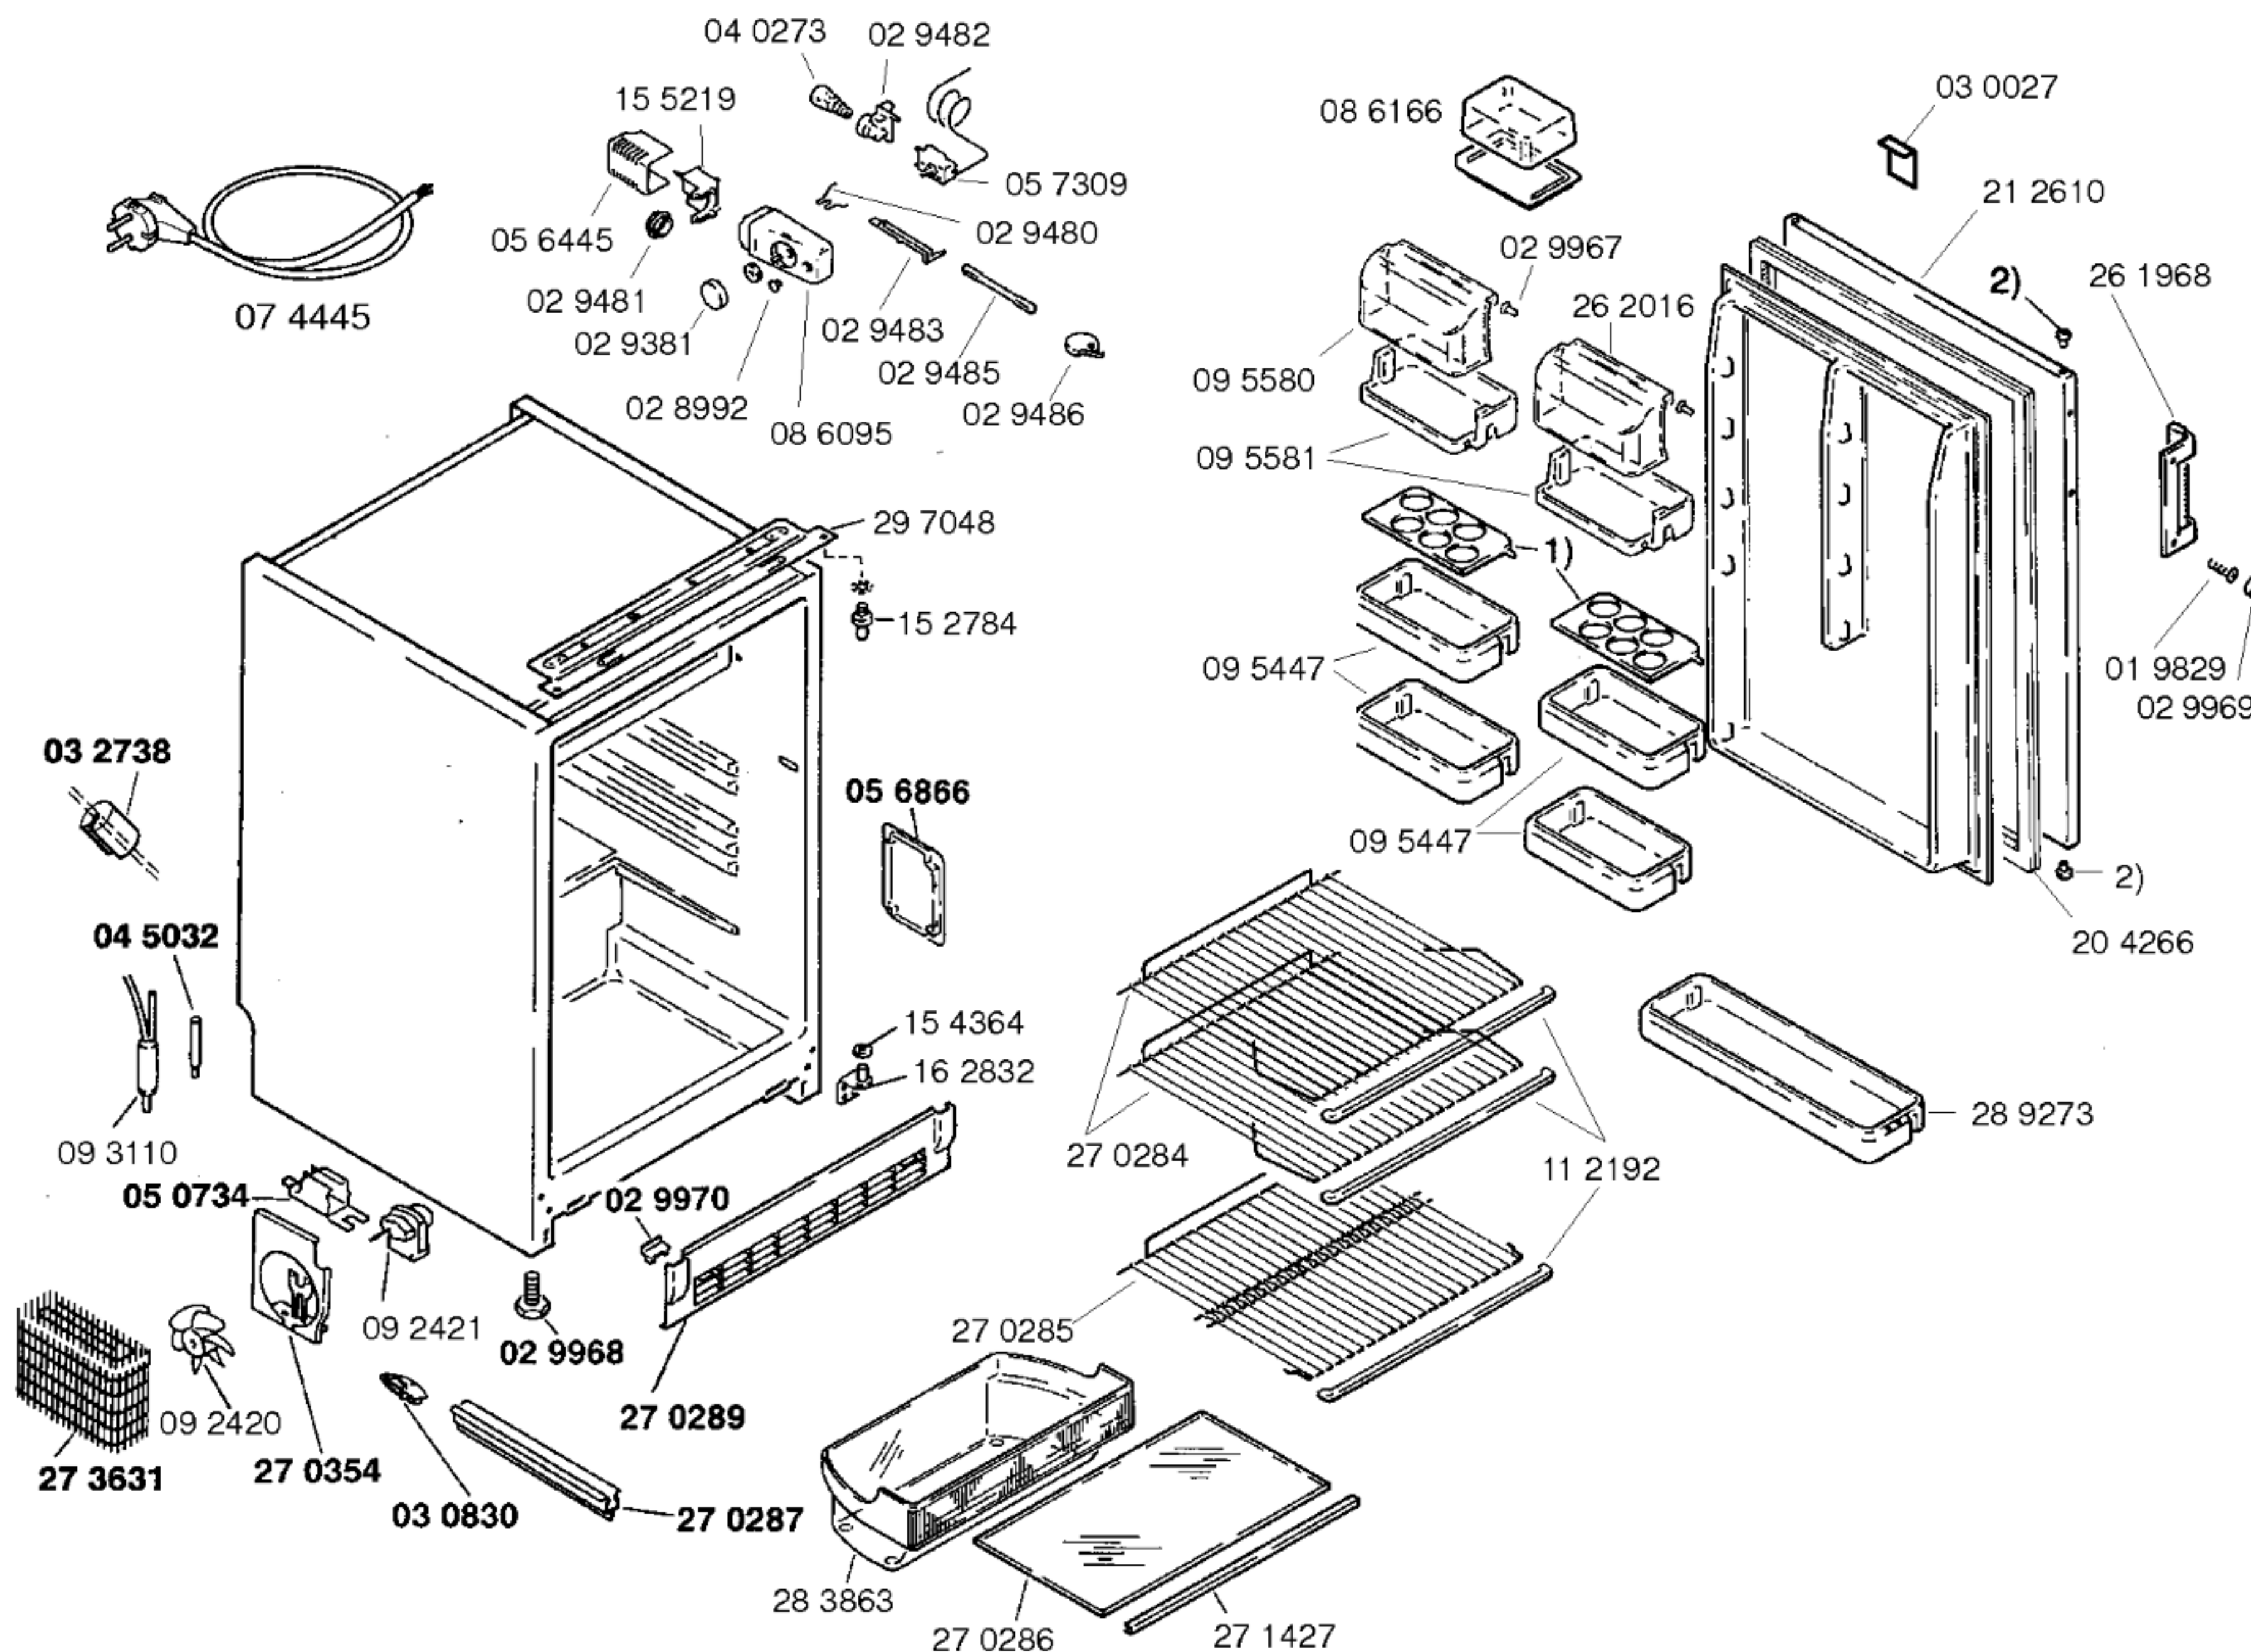


Gebrauchsanweisung
51 3590
(D,GB,F,I,NL,S,SF,E,
P,DK,N)
Montageanweisung
51 4009
(D,GB,F,I,NL,S,SF,E,
P,DK,N)

- 1) 09 4859
- 2) 15 0719

Zubehör:

Dekorrahmen
KSZ1018,weiß
KSZ1016,braun
KSZ1017,Alu

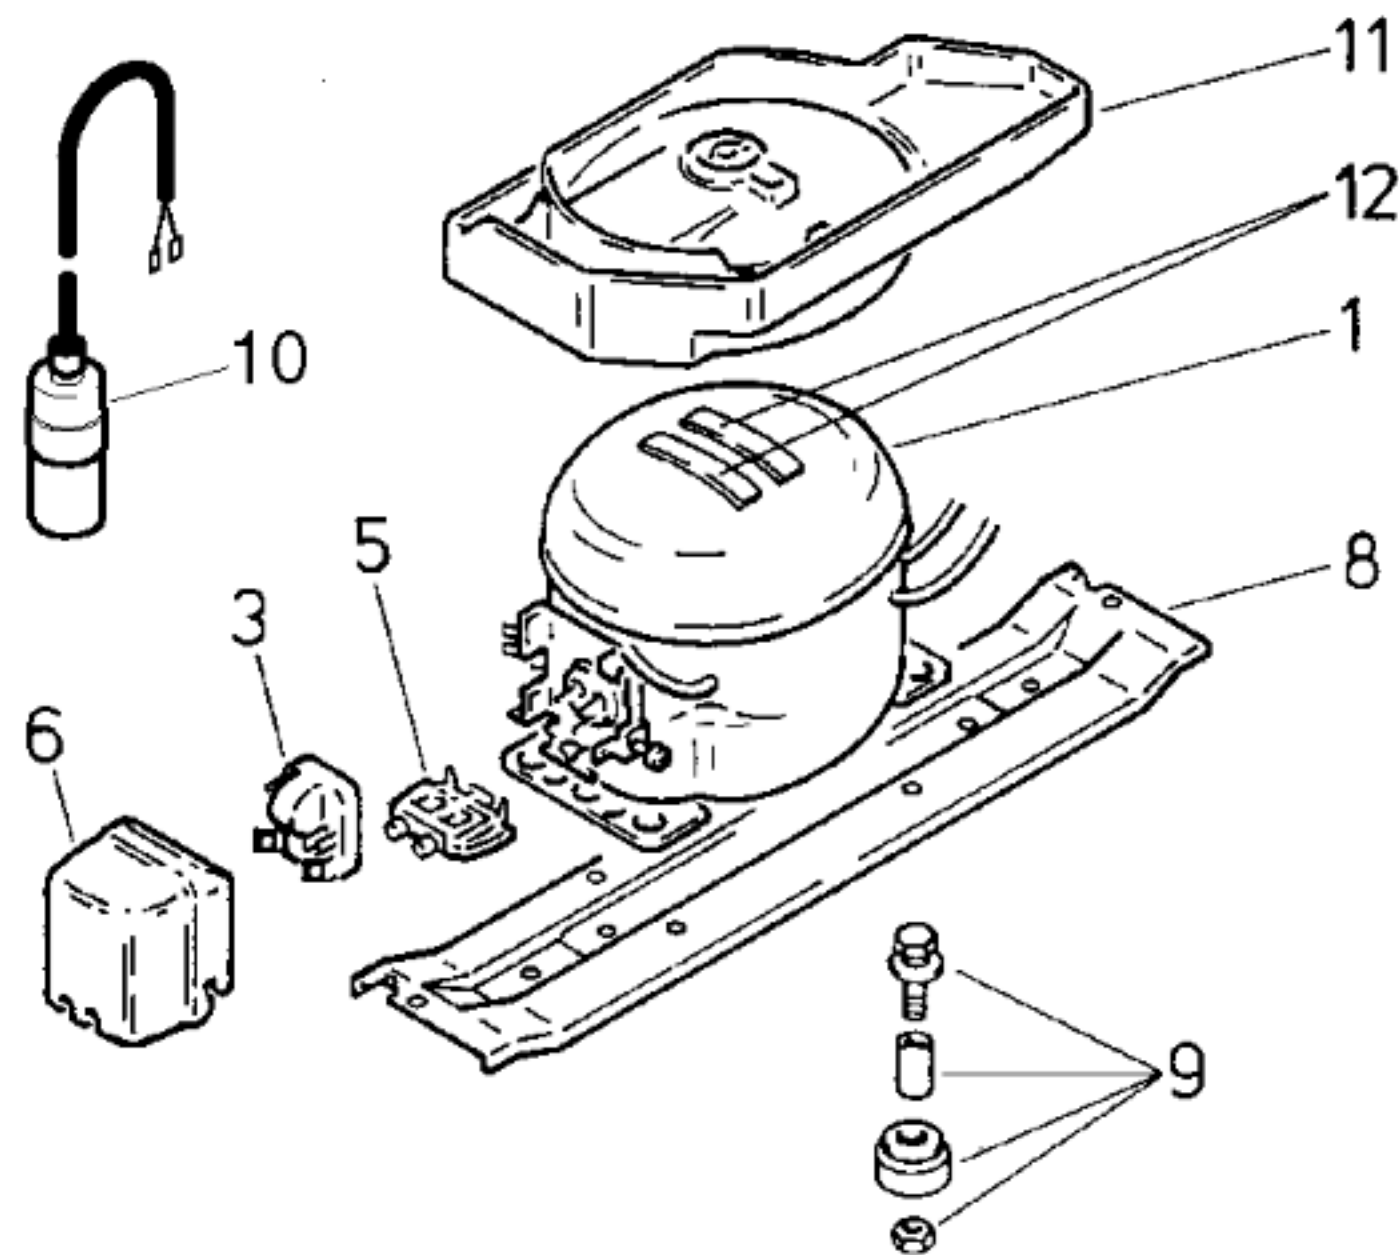

Pos.			
	Matsushita		
	SD 65 E		
1	14 1316		
2			
3	15 3306		
4			
5	15 3865		
6	15 3306		
7			
8	27 0291		
9	05 0166		
10			
11	08 8893		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Matsushita	
Typ/Type		SD 65 E	
Förderleistung/Delivery/Débit	l/h	1170	
Anlaufstrom/Starting current/Cour de démarrage	A		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω		
	Hi/aux Ω		
Temp.-Regler/Thermostat			
Typ/Type			
Reglerstellung/Position			
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$		
Valeurs de commutation	„aus“		
(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée	W		
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild