



x Türe links angeschlagen - door with left bearing - porte ouverte à gauche

Dekorleistensatz (Nachrüstset) - frame for decorative plate - cadre d'habillage 19 4373/29

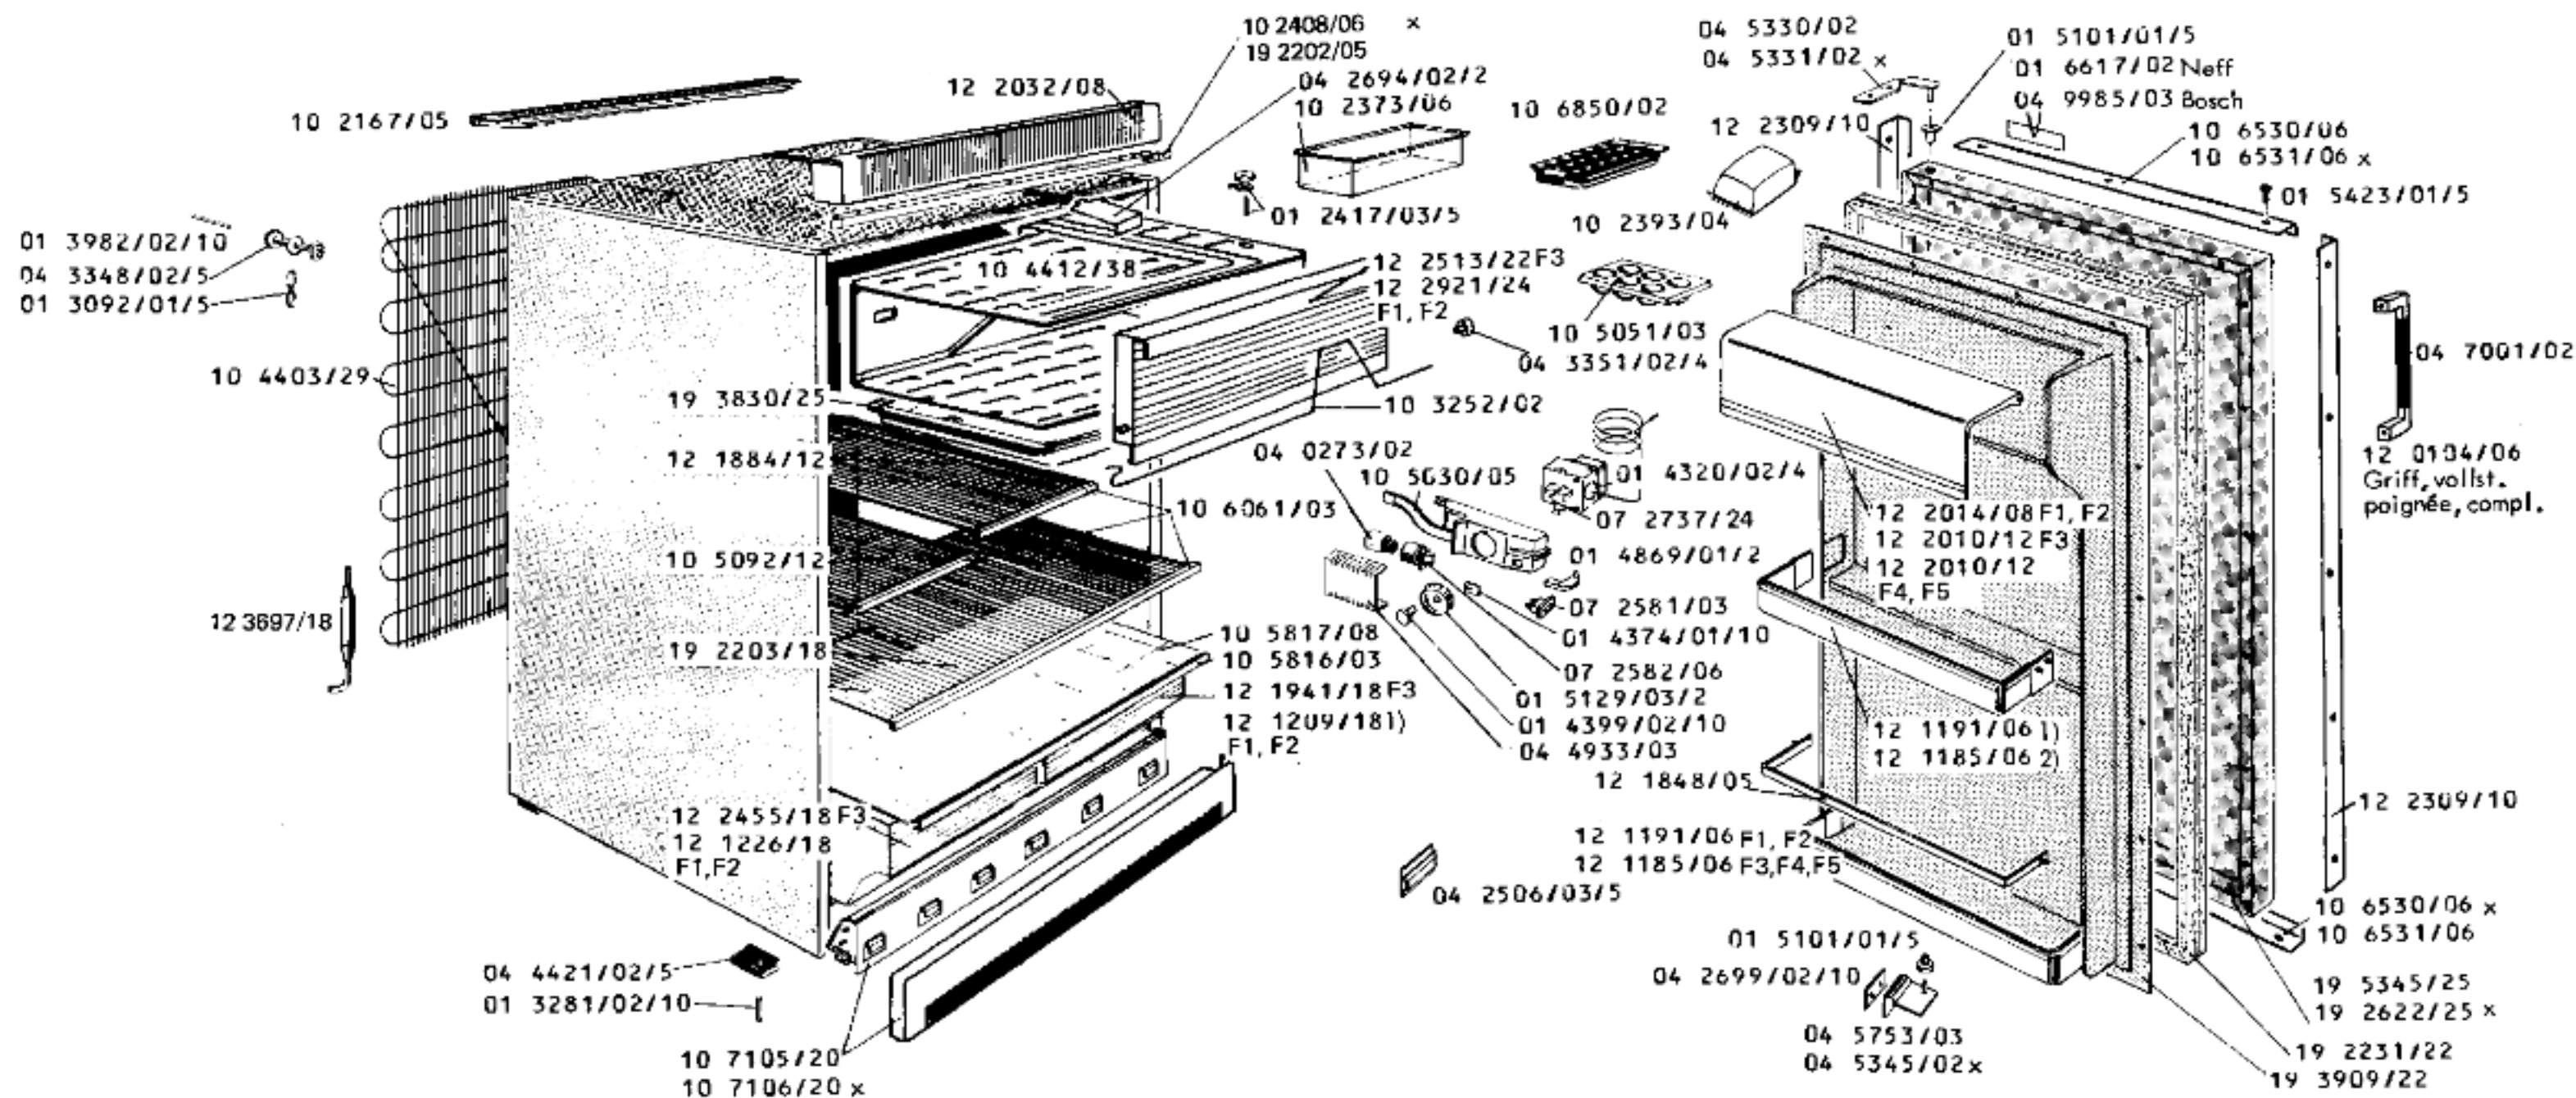

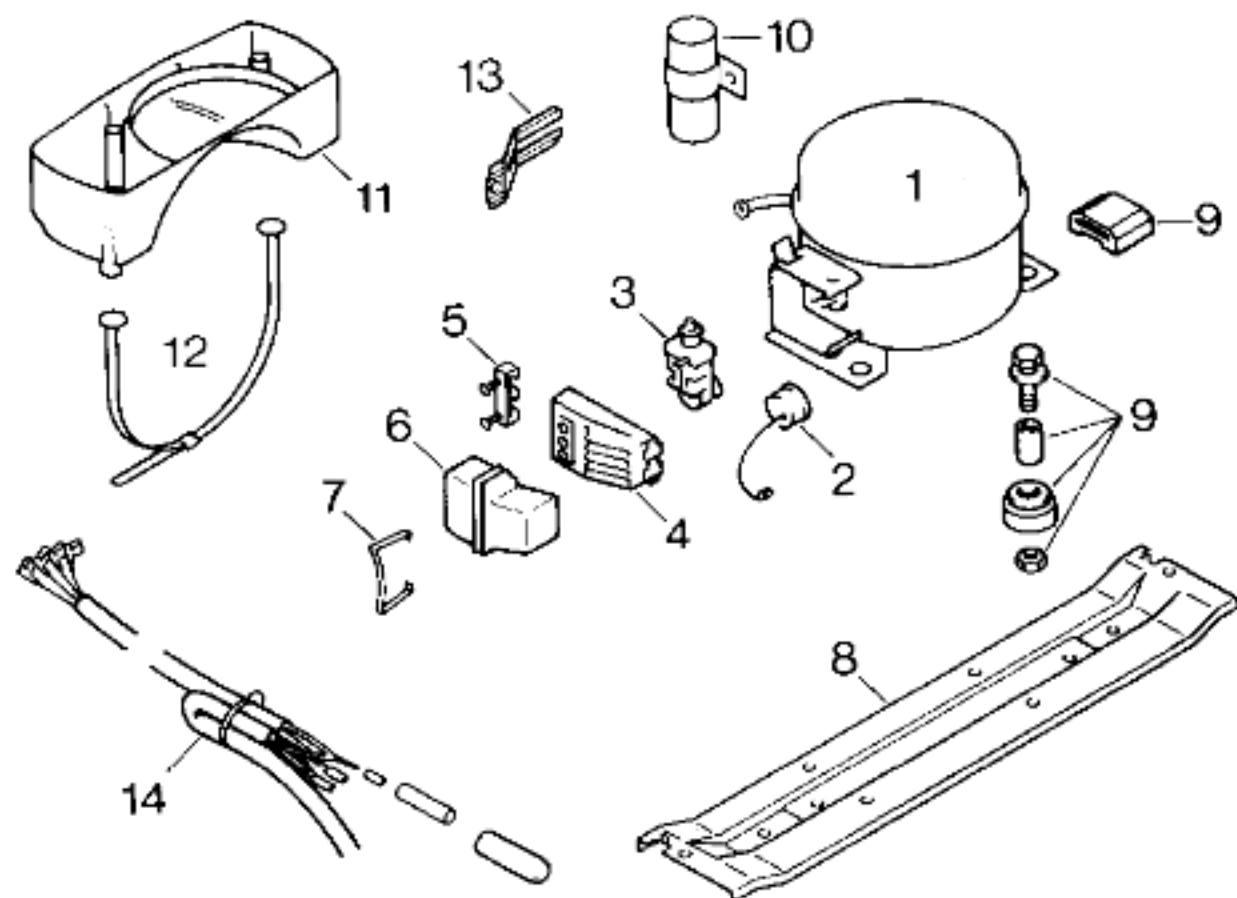

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 792	TL 4 A		
Förderleistung/Delivery/Débit		l/h	792	702	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	7,8	
Widerstand/Resistance/Résistance		Ω	23,0	23,8	
Hi/aux		Ω	25,2	17,0	
Temp.-Regler/Thermostat			Ranco		
Typ/Type			A 59		
Reglerstellung/Position			kalt	warm	
Schaltwerte/Switching values/		°C	-12	-2,5	
Valeurs de commutation			-25	-11,5	
(„abtauen“ od.)			+6		
Füllmenge/Fill.quantity/Charge		R12	g	85	
Anschlußwert/Conn.load/Puiss. connectée		W	100		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	F1 - F5	F1 - F5		
	Bosch	Danfoss		
1		13 1064/45		
2	07 2115/18			
3	07 1804/18	02 0108/27		
4	04 9757/02			
5		02 1361/04		
6		05 1413/06		
7				
8		*11 1839/07		
9		*05 0166/05/4		
10				
11	10 6693/03	*11 1243/01		
12				
13		*04 1568/01/2		
14		*05 1226/08		

*) Bei Ersatz des Bosch-Verdichters mitbestellen
 To be ordered when replacing the Bosch compressor
 A commander lors du remplacement du compresseur Bosch