


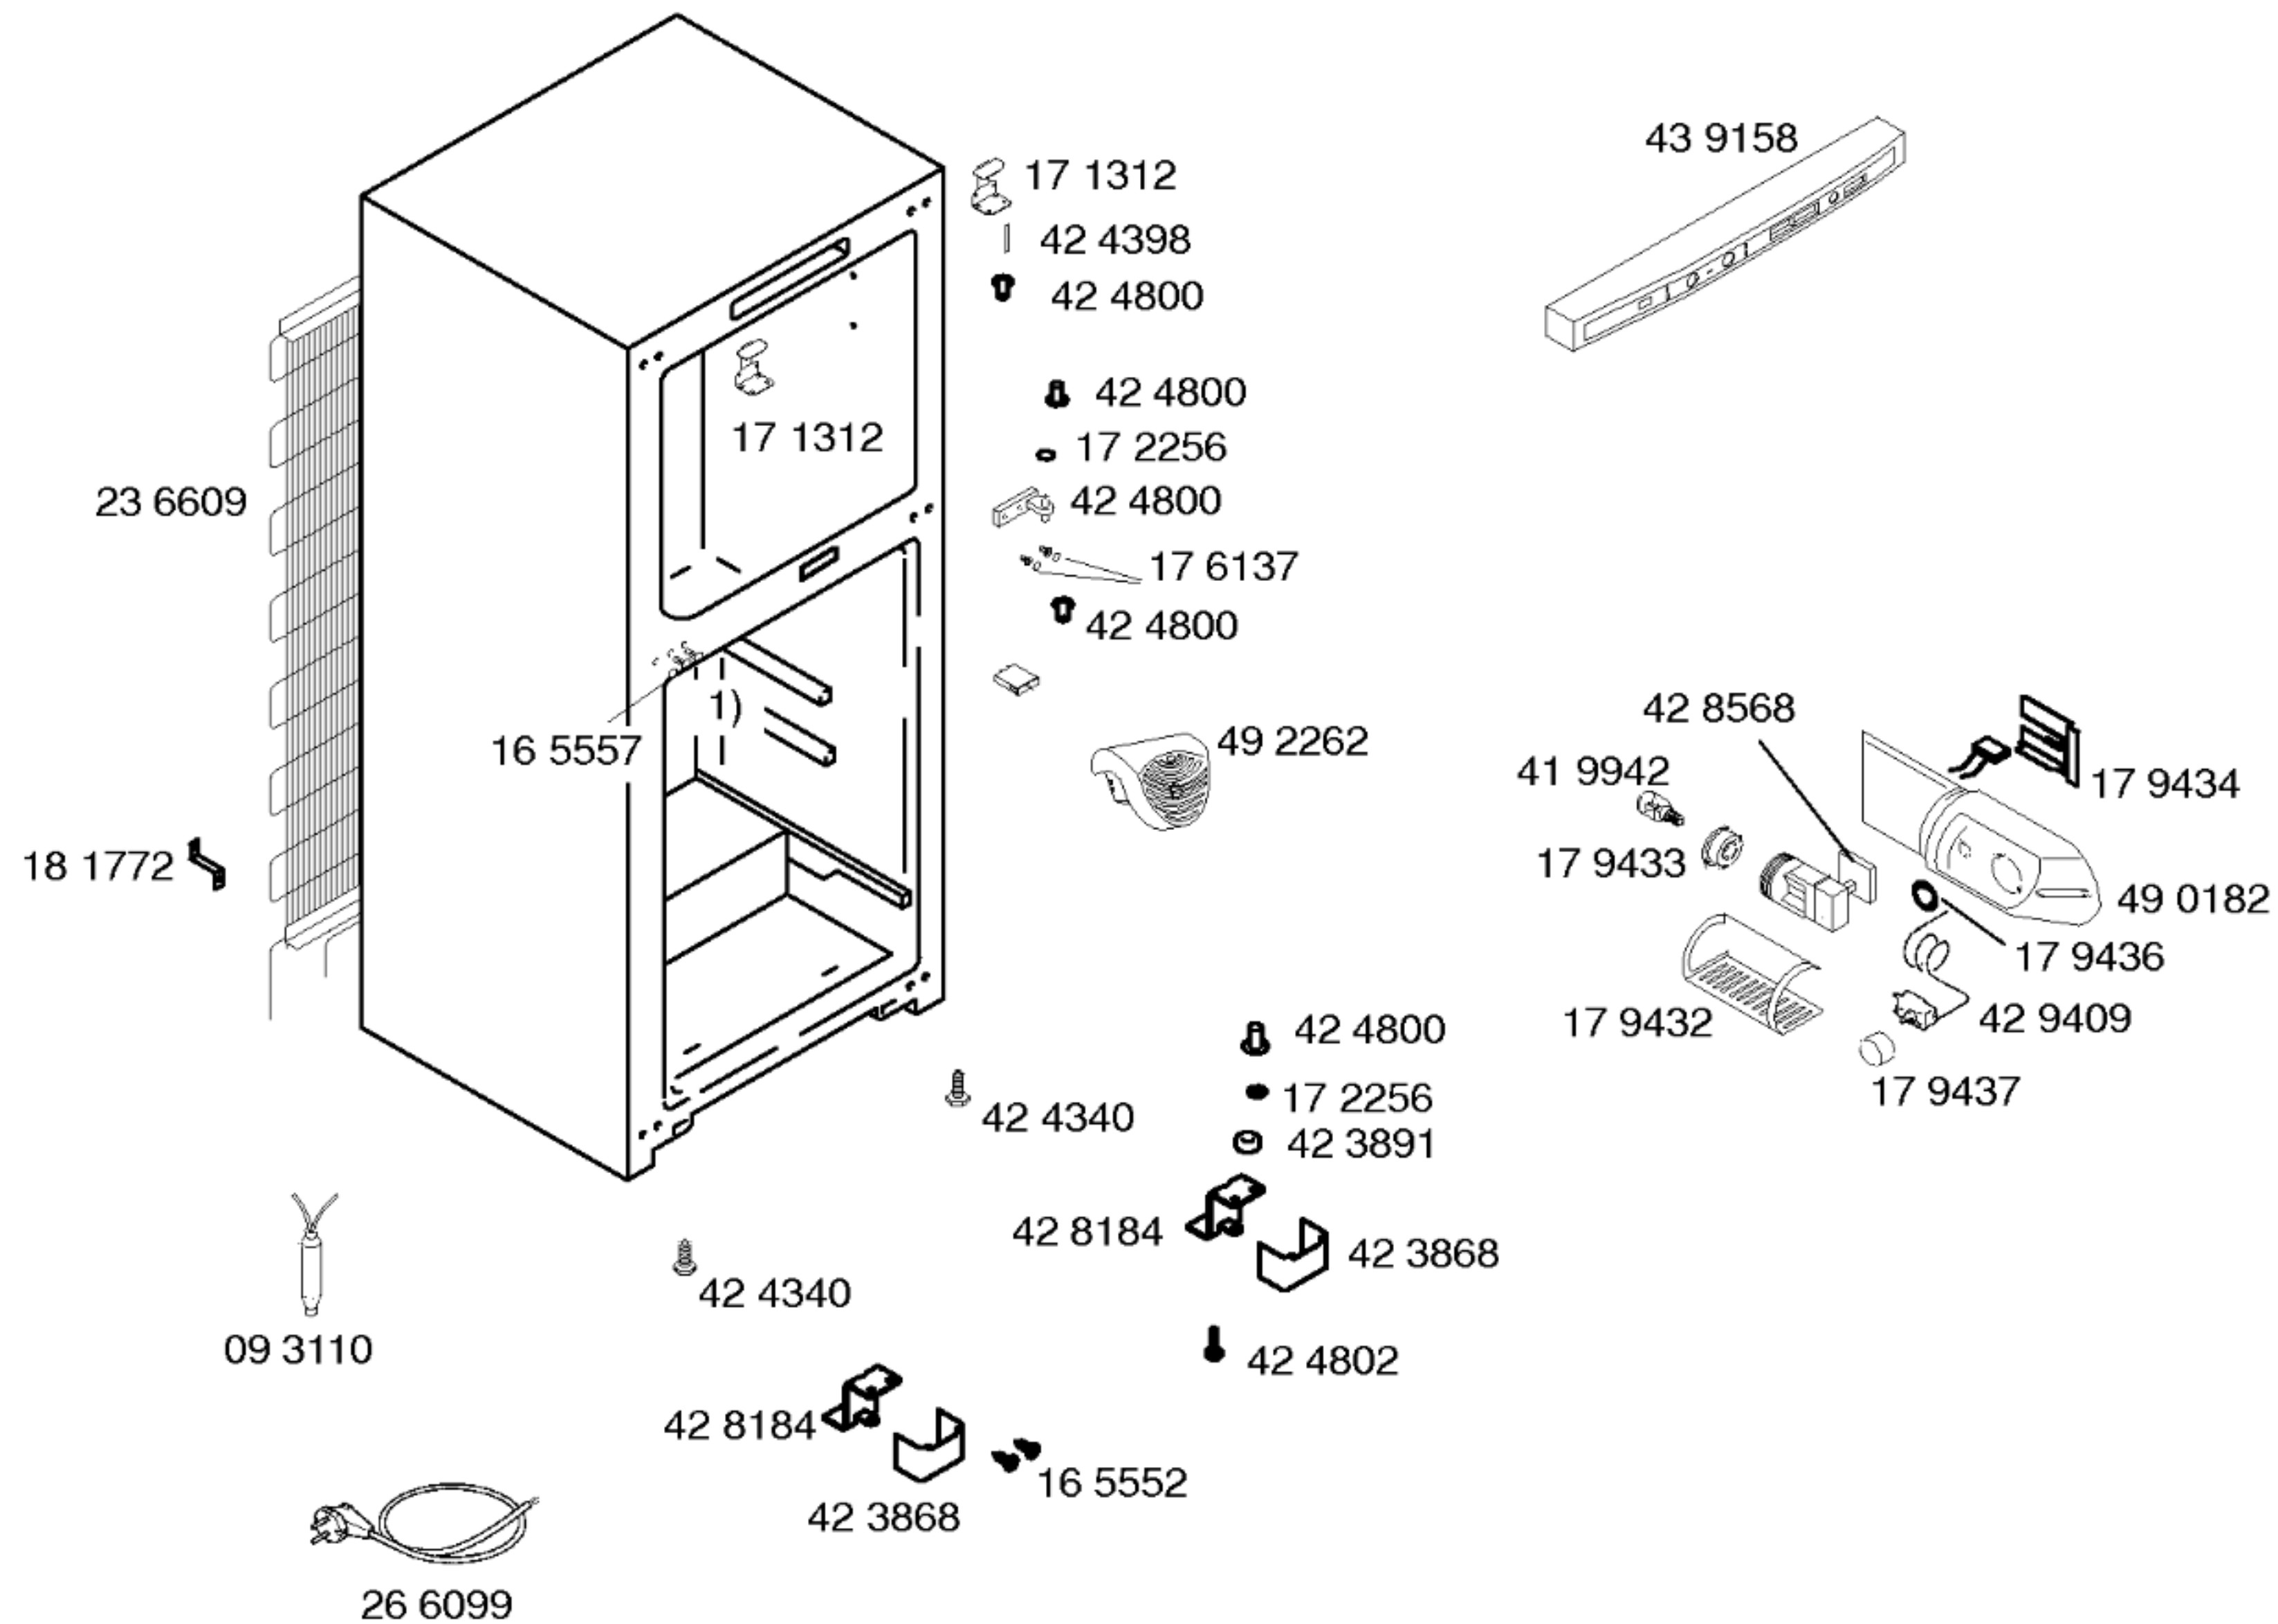




Mat. – Nr. – Konstante
3740

Gebrauchsanweisung
59 4298
(EN,FR,CZ,HU,SL,RO
PT,DE,NL)

Mat. – Nr. – Konstante
3740

- 1) 35 4164
- 2) 35 4166
- 3) 16 6484


43 4938

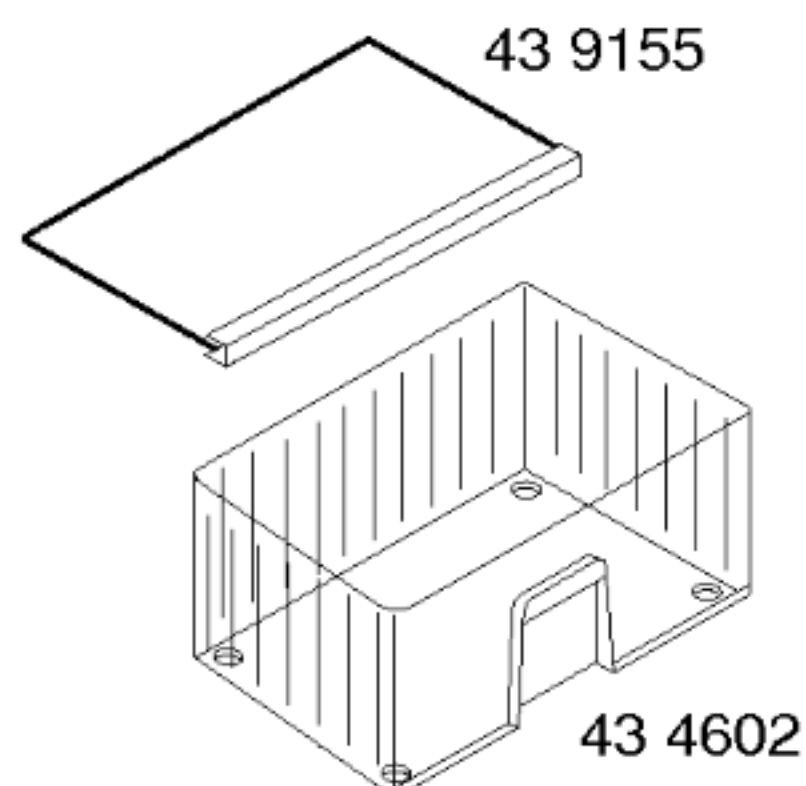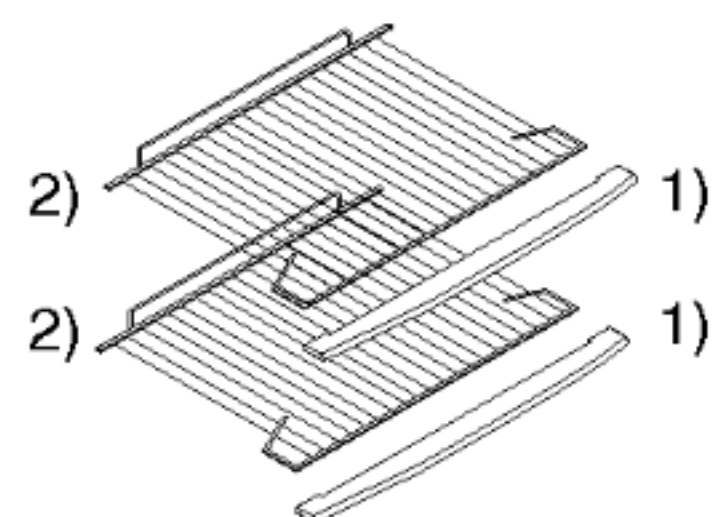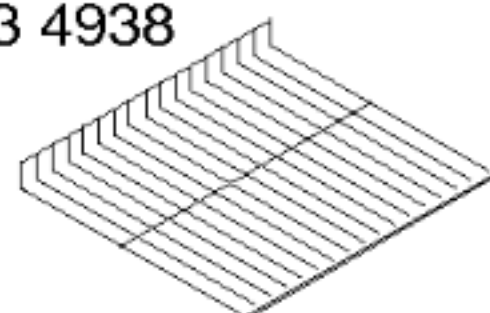

49 3450




43 9153

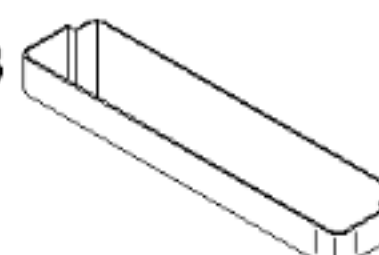


43 9152

42 4610
43 9159

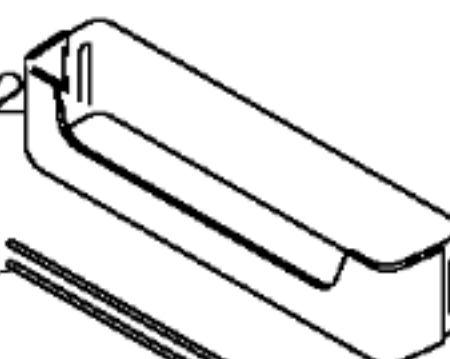


42 4611

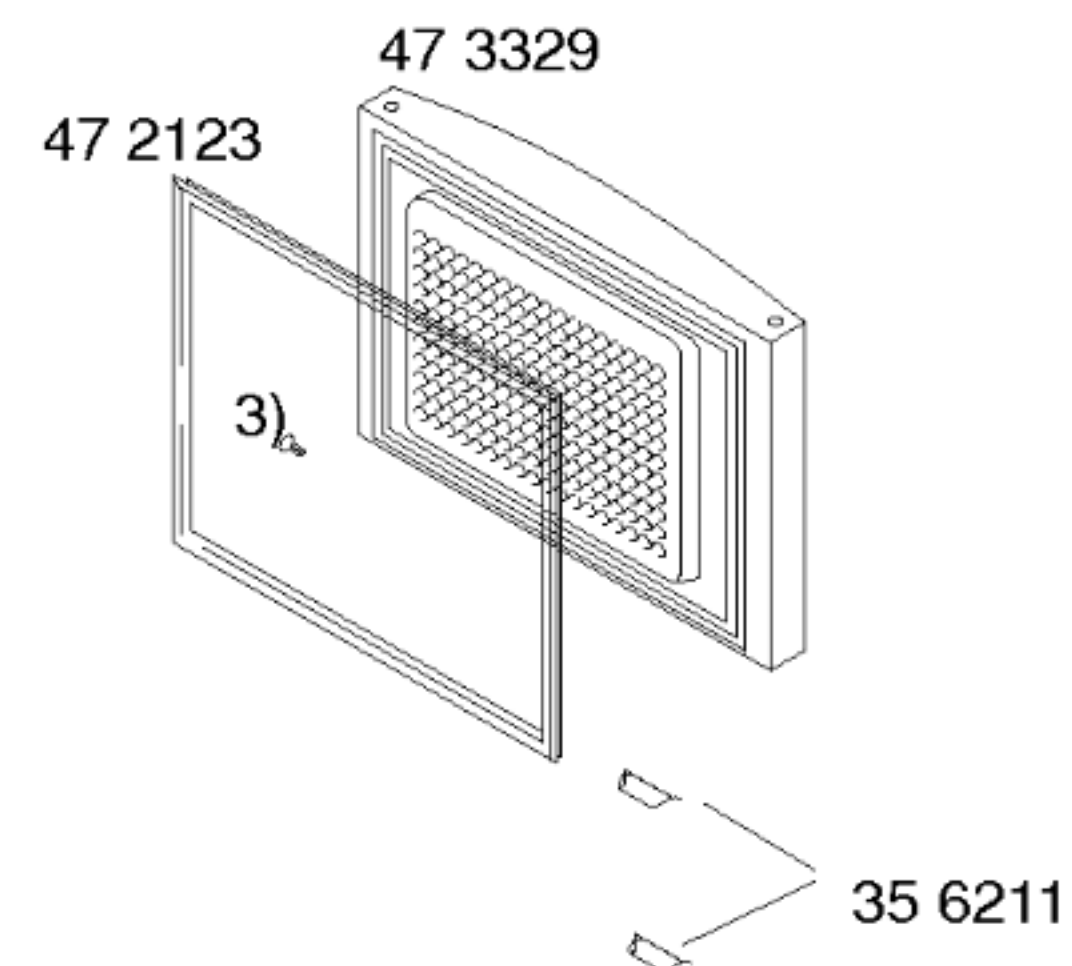


24 1383

24 1831

17 1319

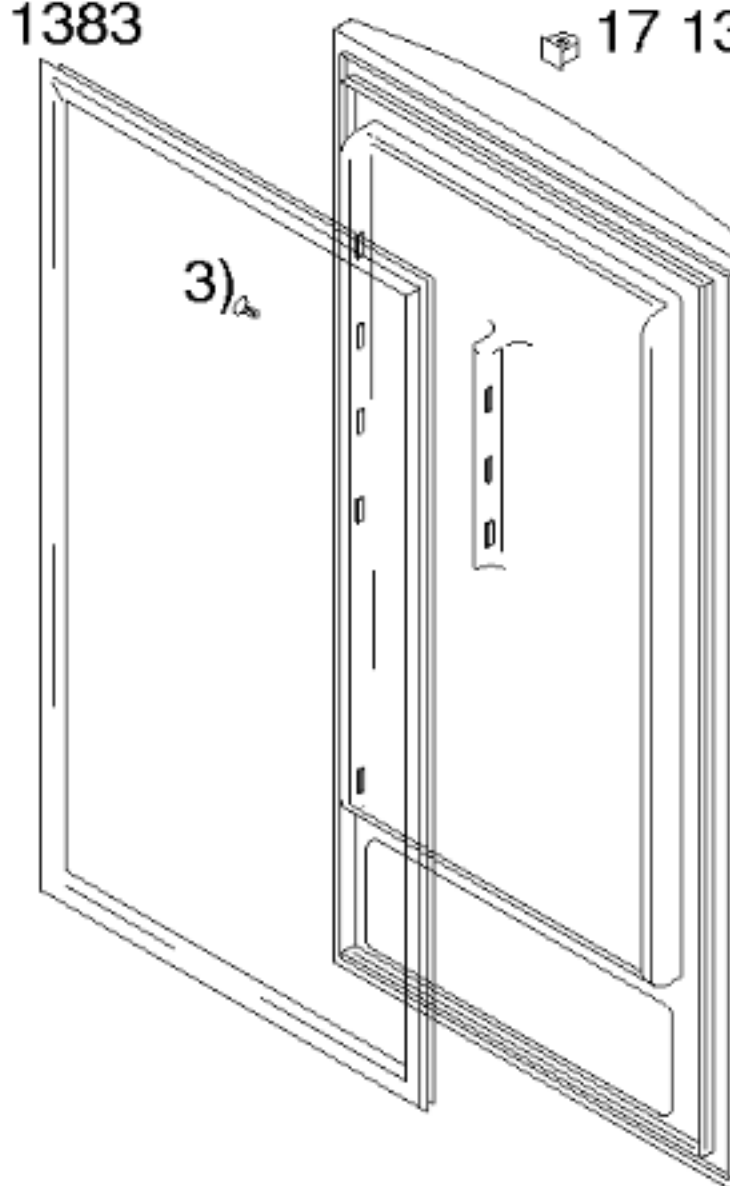

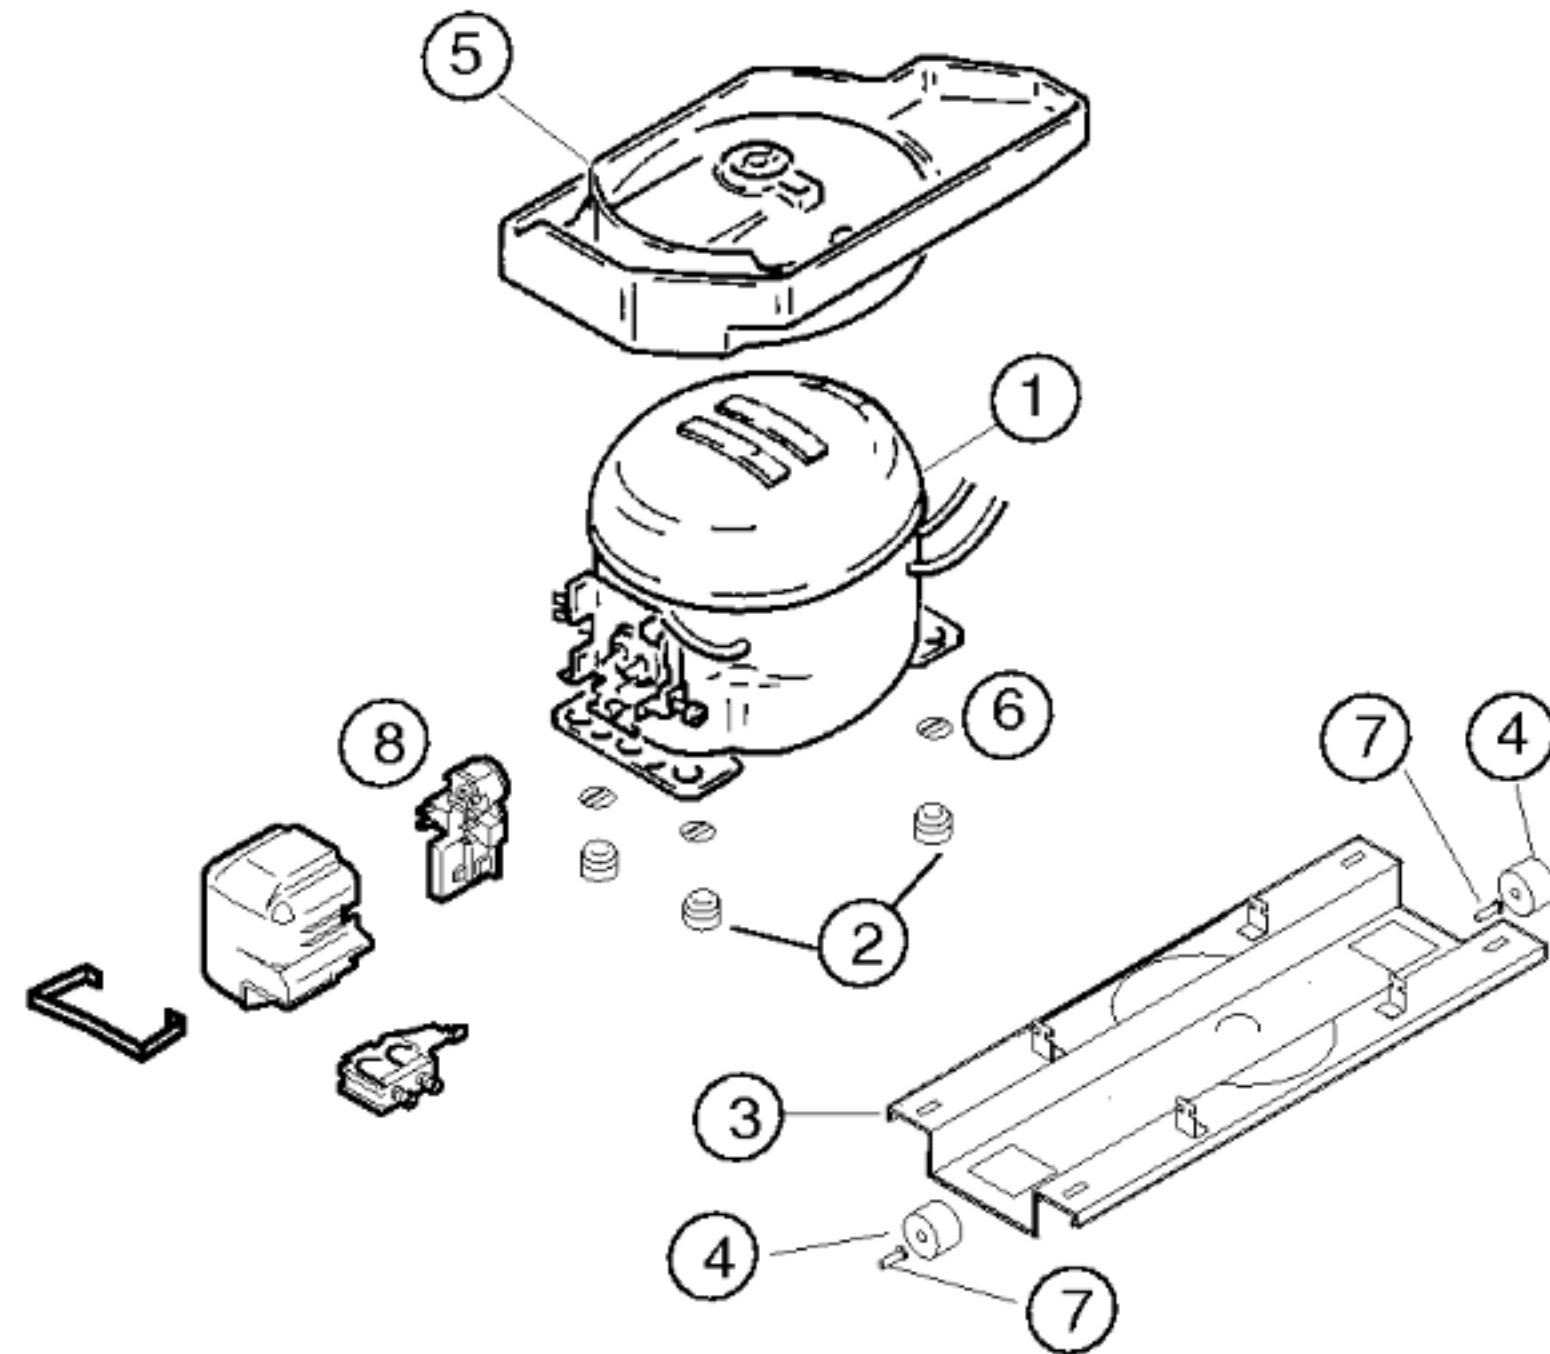Mat. – Nr. – Konstante
3740

Pos.	Matsushita		
	DA110E13		
1	14 2303		
2	16 3427		
3	43 8318		
4	17 1318		
5	49 1245		
6	17 1519		
7	18 1014		
8	18 7960		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör		Matsushita	
Typ/Type/Tip		DA110E13	
Förderleistung/Delivery/Verim/h			
Anlaufstrom/Starting current/Giris akimi	A	0.5	
Widerstand/Resistance/Rezistans Ha/	Ohm	12.41	
Hi/aux.		29.2	
Temp.Reyler/Thermostat/Termostat		Danfoss	
Typ/Type/Tip		D77B62	
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Acma kapama degerleri	..ein/acma °C	+4.5 +4.5	
Valeurs de commutation/Termostat degeri	..aus"/kapama	-31 -18	
(..abtaven' od)	..alarm'	-31	
Füllmenge/Fill. quantily/ Dolum miktarı	R600a g	*	
Anschlusswert/Comm. load/Giris gucu	W	*	
Heizung/Heater/Rezistans	Ohm		
Widerstand/Resistance/Direnc	W		
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör	Ohm		
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf	Ohm		
Widerstand/Resistance/Rezistans	V		
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız