

**BOSCH**KTL7104/01-V01
KTL7104/02-V02KÜHL-, GEFRIERGERÄTE
Kühlschränke, TischIdent - Nummern - Konstante
3740

Gebrauchsanweisung

51 3590

(D,GB,F,I,NL,S,SF,E,P,
DK,N)

Montageanweisung

51 3592

(D,GB,F,I,NL,S,SF,E,P,
DK,N)

1) 01 9257

2) 02 0605

3) 02 9971

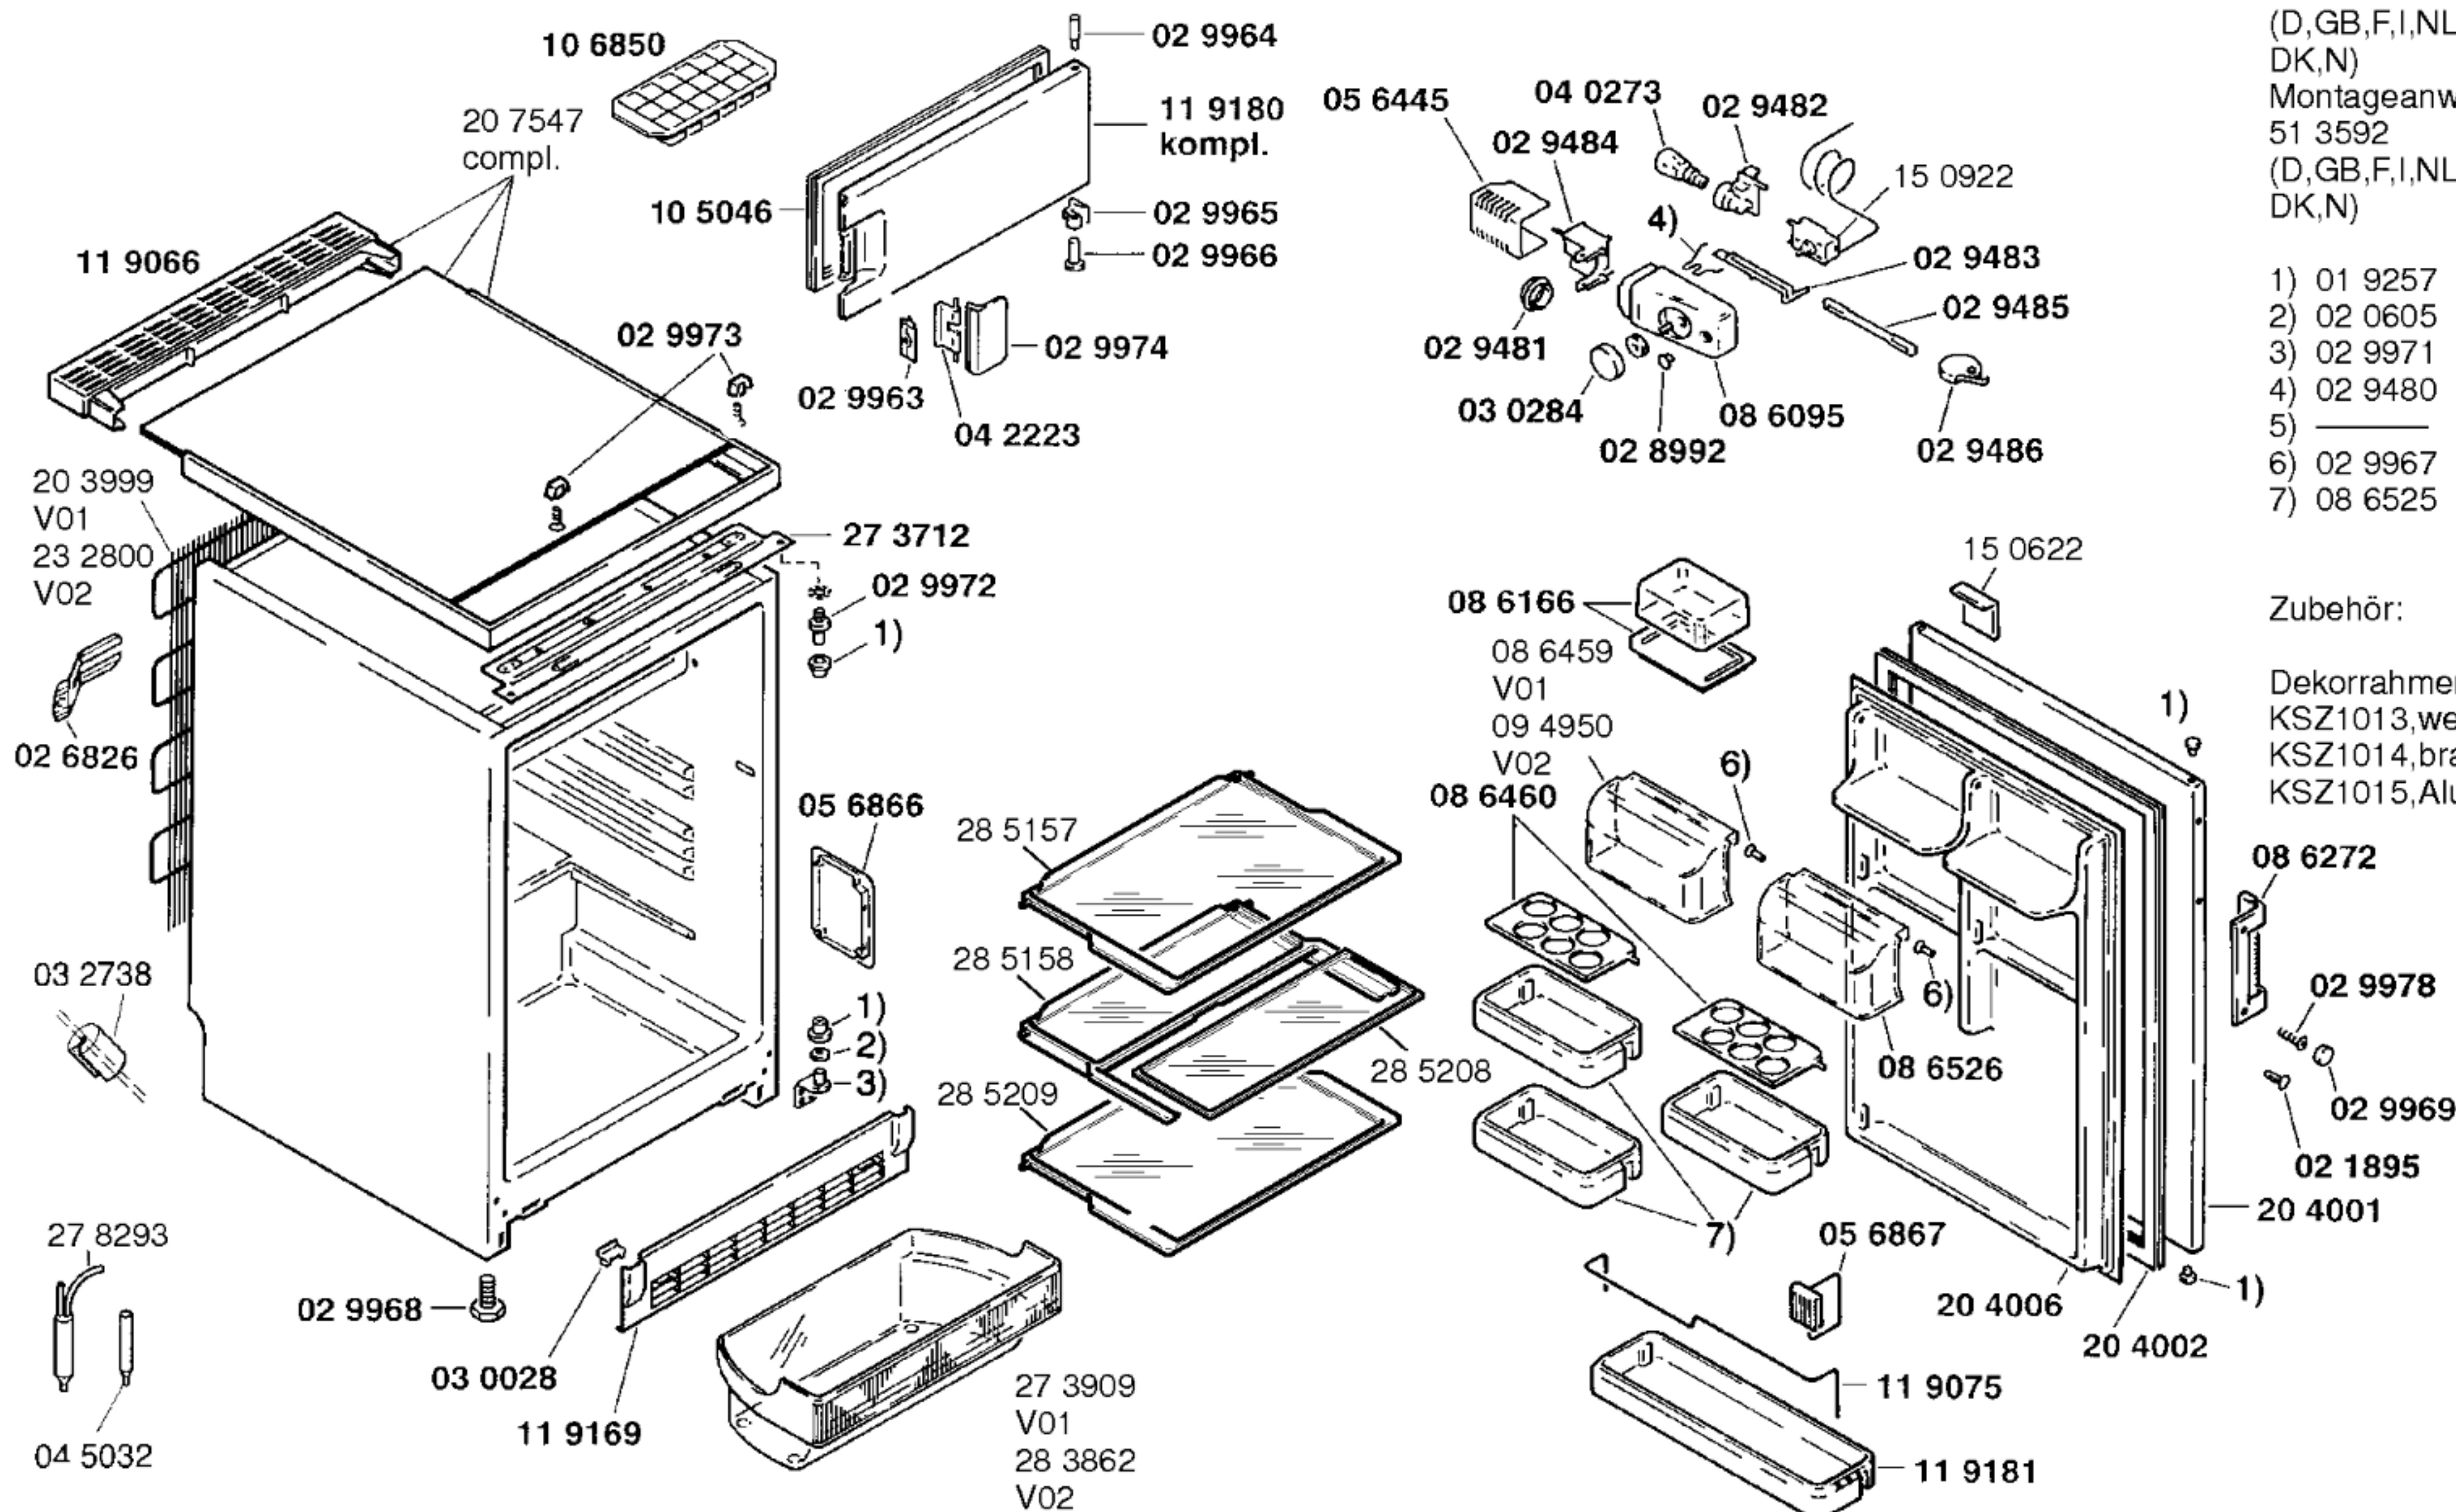
4) 02 9480

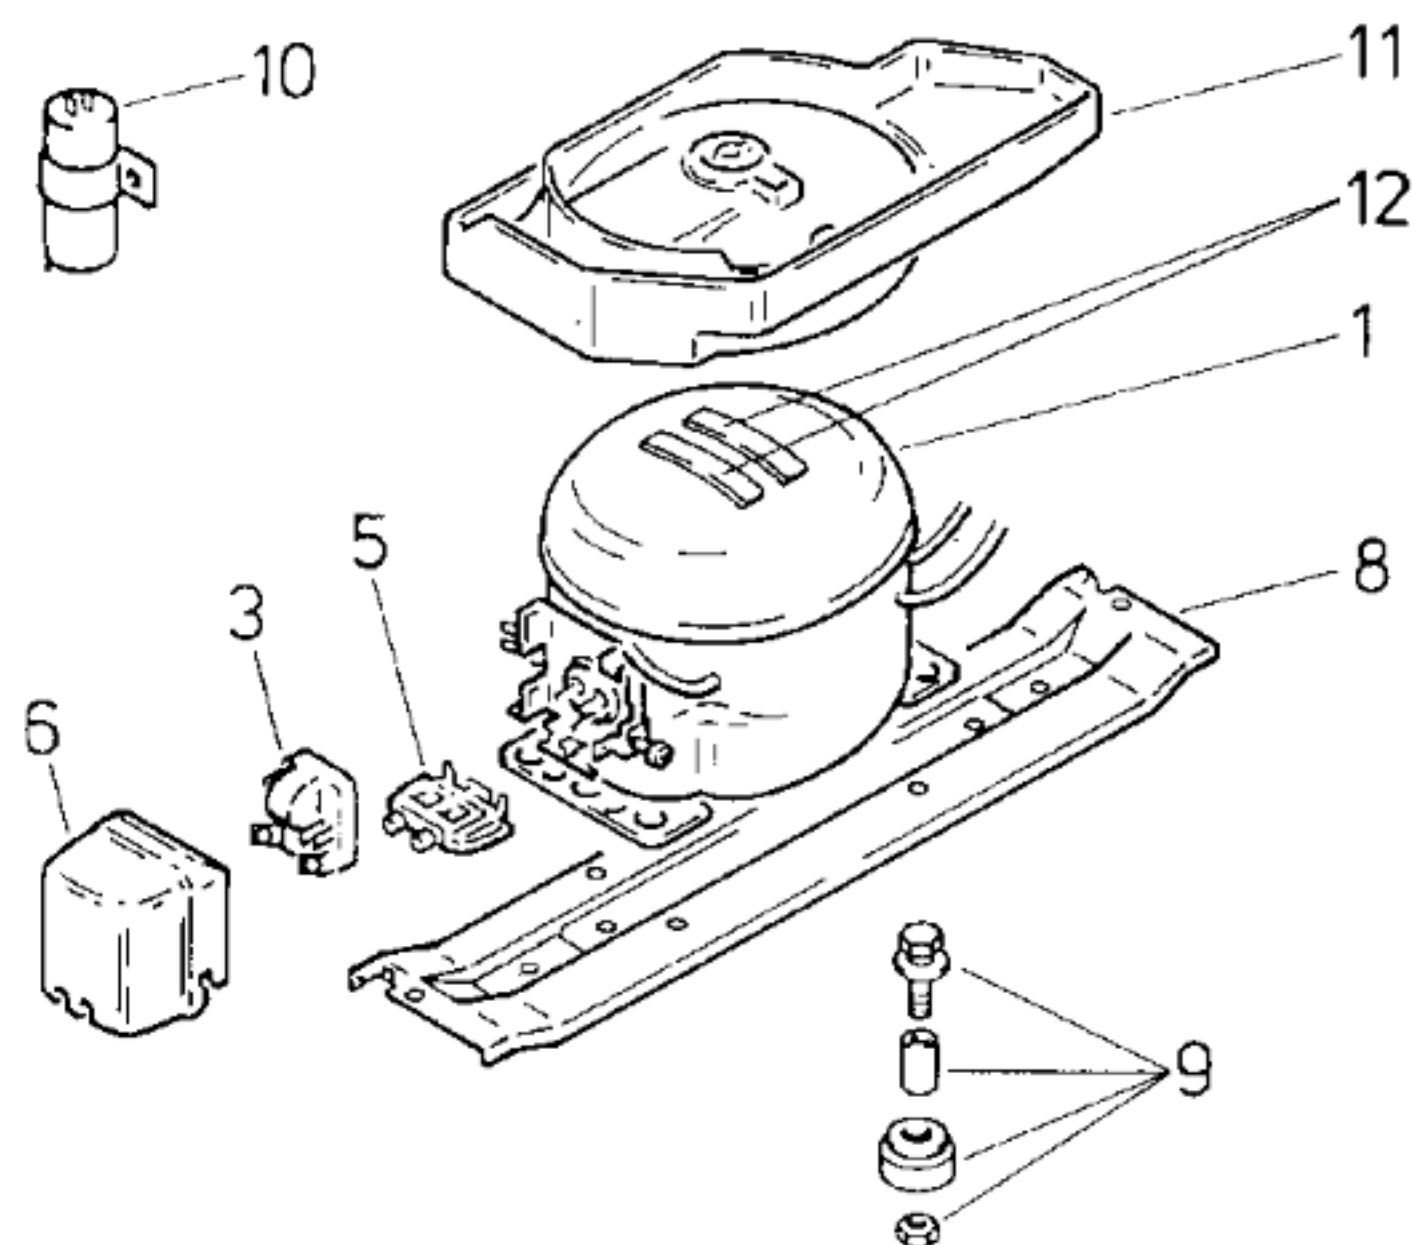
5) ———

6) 02 9967

7) 08 6525

Zubehör:

Dekorrahmen
KSZ1013, weiss
KSZ1014, braun
KSZ1015, Alu

**BOSCH**KTL7104/01-V01
KTL7104/02-V02KÜHL-, GEFRIERGERÄTE
Kühlschränke, TischIdent – Nummern – Konstante
3740

	V01	V02	
Pos.	Danfoss	Danfoss	
	TL5F	TLES5F	
1	14 1149	14 1242	
2			
3	05 9191	05 9191	
4			
5	15 0760	15 0760	
6	15 1072	15 1072	
7			
8	27 1375	27 1375	
9	05 0166	05 0166	
10			
11	08 4744	08 4744	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Danfoss	
Typ/Type		TL 5 F	TLES 5 F	
Förderleistung/Delivery/Débit		l/h	914	914
Anlaufstrom/Starting current/Cour de démarrage		A	8,9	4,0
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	18,0	18,9
		Hi/aux Ω	14,7	15,3
Temp.-Regler/Thermostat		Dan		
Typ/Type				
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	+4,5	+4,5
Valeurs de commutation		„aus“	-31,0	-13,5
		(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge		R134a g	V01-85	V02-60
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		